TM Forum Specification

Process Management User Guide

TMF701

Maturity Level: General Availability (GA)	Team Approved Date: 11-Sep-2026
Release Status: Production	Approval status: Team Approved
Version: 5.0.0	IPR Mode: RAND

Notice

Copyright © TM Forum 2026. All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published, and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this section are included on all such copies and derivative works. However, this document itself may not be modified in any way, including by removing the copyright notice or references to TM FORUM, except as needed for the purpose of developing any document or deliverable produced by a TM FORUM Collaboration Project Team (in which case the rules applicable to copyrights, as set forth in the TM FORUM IPR Policy, must be followed) or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by TM FORUM or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and TM FORUM DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY OWNERSHIP RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

TM FORUM invites any TM FORUM Member or any other party that believes it has patent claims that would necessarily be infringed by implementations of this TM Forum Standards Final Deliverable, to notify the TM FORUM Team Administrator and provide an indication of its willingness to grant patent licenses to such patent claims in a manner consistent with the IPR Mode of the TM FORUM Collaboration Project Team that produced this deliverable.

TM FORUM invites any party to contact the TM FORUM Team Administrator if it is aware of a claim of ownership of any patent claims that would necessarily be infringed by implementations of this TM FORUM Standards Final Deliverable by a patent holder that is not willing to provide a license to such patent claims in a manner consistent with the IPR Mode of the TM FORUM Collaboration Project Team that produced this TM FORUM Standards Final Deliverable. TM FORUM may include such claims on its website but disclaims any obligation to do so.

TM FORUM takes no position regarding the validity or scope of any intellectual property or other rights that might be claimed to pertain to the implementation or use of the technology described in this TM FORUM Standards Final Deliverable or the extent to which any license under such rights might or might not be available; neither does it represent that it has made any effort to identify any such rights. Information on TM FORUM's procedures

with respect to rights in any document or deliverable produced by a TM FORUM Collaboration Project Team can be found on the TM FORUM website. Copies of claims of rights made available for publication and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this TM FORUM Standards Final Deliverable, can be obtained from the TM FORUM Team Administrator. TM FORUM makes no representation that any information or list of intellectual property rights will at any time be complete, or that any claims in such list are, in fact, Essential Claims.

Direct inquiries to the TM Forum office:

100 Enterprise Drive
Suite 301 #1649
Rockaway, NJ 070866, USA
Tel No. +1 862 227 1648
TM Forum Web Page: www.tmforum.org

© TM Forum 2026. All Rights Reserved.

Table of Contents

Notice . . . i
Introduction . . . 1
Sample Use Cases . . . 4
Example of an order capture ProcessSpecification . . . 4
Example of an order capture Process Instance . . . 4
Process and Task Lifecycle . . . 5
Illustration Use Case . . . 8
Order Capture Use case . . . 9
Support of polymorphism and extension patterns . . . 28
RESOURCE MODEL . . . 29
Managed Entity and Task Resource Models . . . 29
ProcessSpecification resource . . . 29
Process resource . . . 57
Task resource . . . 75
TaskSpecification resource . . . 83
Notification Resource Models . . . 93
ProcessSpecification . . . 94
Process . . . 100
Task . . . 104
TaskSpecification . . . 109
API OPERATIONS . . . 114
Operations on ProcessSpecification . . . 114
Retrieves a processSpecification by ID . . . 114
List or find processSpecification objects . . . 117
Creates a processSpecification . . . 120
Updates partially a processSpecification . . . 124
Deletes a processSpecification . . . 136
Operations on Process . . . 136
Retrieves a process by ID . . . 136
List or find process objects . . . 138
Creates a process . . . 141
Updates partially a process . . . 144
Deletes a process . . . 154

© TM Forum 2026. All Rights Reserved.

Operations on Task . . . 154
Retrieves a task by ID . . . 154
List or find task objects . . . 156
Creates a task . . . 161
Updates partially a task . . . 163
Deletes a task . . . 170
Operations on TaskSpecification . . . 170
Retrieves a taskSpecification by ID . . . 170
List or find taskSpecification objects . . . 173
Creates a taskSpecification . . . 176
Updates partially a taskSpecification . . . 180
Deletes a taskSpecification . . . 190
API NOTIFICATIONS . . . 192
Register listener . . . 192
Unregister listener . . . 193
Publish Event to listener . . . 193
Acknowledgements . . . 195
Release History . . . 195
Contributors to Document . . . 196

© TM Forum 2026. All Rights Reserved.

Introduction

The following document is the specification of the REST API for Process Management. It includes the model definition as well as all available operations. Possible actions are creating, updating, and retrieving Process, ProcessSpecification, Task and TaskSpecification.

The TMF701 Process Management API allows management of business process definition and execution. It manages Process, ProcessSpecification, Task and TaskSpecification resources:

- A ProcessSpecification is a business process specification described in a BPMN engine or hard coded. It describes relationship with other entity specification but also party involved in this specification design. A ProcessSpecification will define an orchestration of TaskSpecification. A TaskSpecification could be re-used by several ProcessSpecification.
- A Process represents an instance of a pre-designed ProcessSpecification. It defines a start point, an orchestration of task (that could be dynamically instantiated) and end point(s). Entities involved in the process completion could be related to the process.
- A TaskSpecification is a business process task specification – in other words, a "work" description to be done within a ProcessSpecification.
- A Task is an instantiation of a TaskSpecification. It could be completed automatically (send an email, execute a business rule, wait for an event triggered by an external system) or requiring manual action (a form to be completed).

TMF701 Process Management API performs the following operations on ProcessSpecification resource:

- Retrieval of a ProcessSpecification or a collection of ProcessSpecification(s) depending on filter criteria
- Creation of a ProcessSpecification
- Partial update a ProcessSpecification
- Deletion of ProcessSpecification
- Notification of events on ProcessSpecification
  - ProcessSpecification creation
  - ProcessSpecification status change
  - ProcessSpecification deletion
  - ProcessSpecification attribute value change

© TM Forum 2026. All Rights Reserved.

...on TaskSpecification resource:

- Retrieval of a TaskSpecification or a collection of TaskSpecification(s) depending on filter criteria
- Creation of TaskSpecification
- Partial update of a TaskSpecification
- Deletion of TaskSpecification
- Notification of events on TaskSpecification
  - TaskSpecification creation
  - TaskSpecification status change
  - TaskSpecification deletion
  - TaskSpecification attribute value change

... on Process resource:

- Retrieval of a Process or a collection of Process(s) depending on filter criteria
- Creation of a Process
- Deletion of Process(for administration purposes)
- Notification of events on Process
  - Process creation
  - Process status change
  - Process deletion
  - Process attribute value change

And on Task resource:

- Retrieval of a Task or a collection of Task(s) depending on filter criteria
- Creation of a Task
- Partial update of a Task
- Deletion of a Task
- Notification of events on Task
  - Task creation
  - Task status change
  - Task deletion

© TM Forum 2026. All Rights Reserved.

- Task information required
- Task attribute value change

The following assumptions were considered in the development of this document: The process management API should rely on a BPMN (Business Process Model and Notation) tool but nothing prevents if from having a hard-coded component.


© TM Forum 2026. All Rights Reserved.

Sample Use Cases


Reader will find example of use cases using Process API in "How to use ODA – Using Open APIs to realize Use Cases IG1228" TMF document.

To illustrate JSON we will use the following example of a definition of a ProcessSpecification featuring 5 TaskSpecification (tfs99, tfs0, tfs1, tfs2 and tfs3). For the Process & task examples we use instances of theses specifications.

Example of an order capture ProcessSpecification

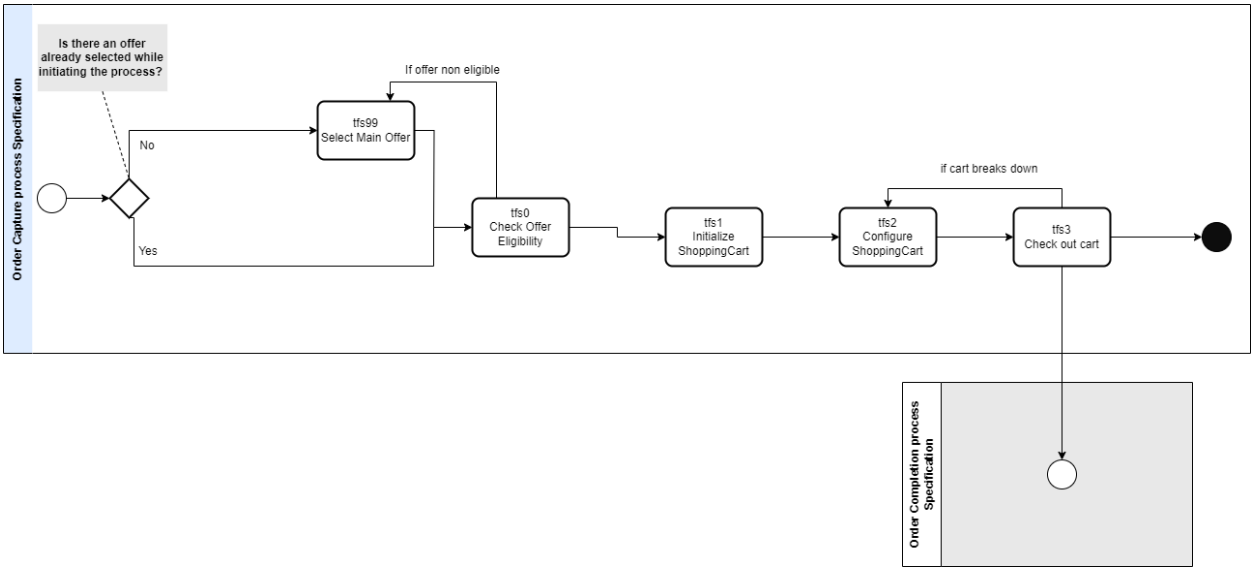

Example of an order capture Process Instance

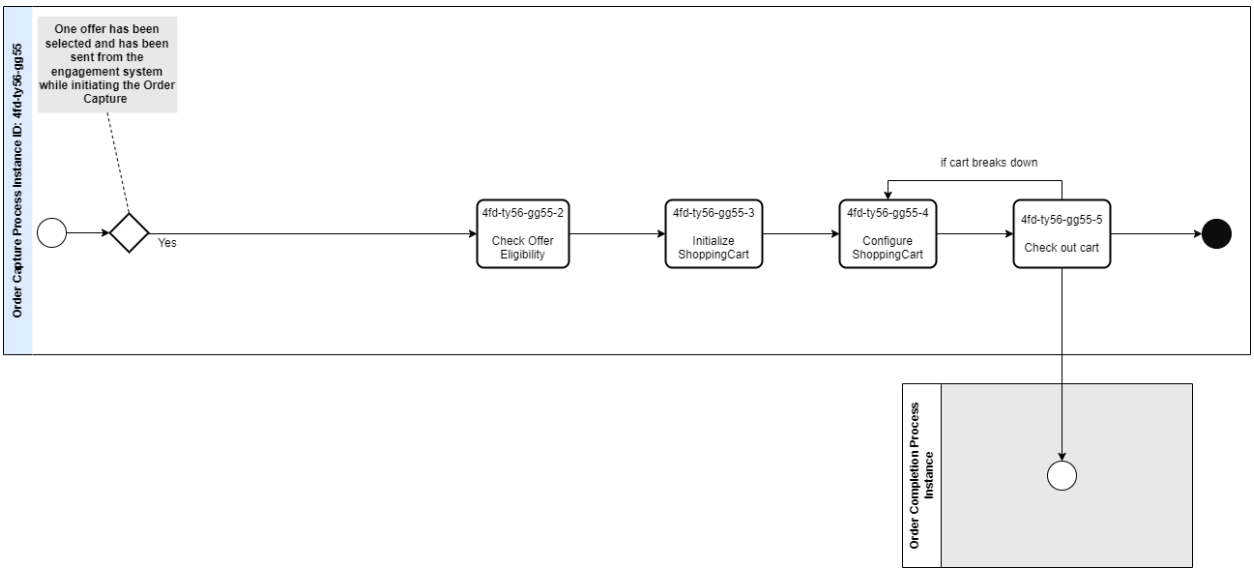

© TM Forum 2026. All Rights Reserved.

For this use case, we will use an orderCapture business process that will manage a 'shoppingCart' initialization and completion as a process example. The process is very simple:

- The order Capture process is launched with contextual information about the interaction, we assume that the customer identification is already done and is not part of this process.
- A productOffering may be passed in the first request. If not the first task will be to ask for one from the customer. For simplification purposes, we assume it to be a "main offer".
- Then, a check on the commercial eligibility should be done.
- Once commercial eligibility confirmed, a shoppingCart is intialized.
- After shopping cart configuration and user acknowledgement, a task is performed to check cart completion, if it's successful an orderCompletion Process is launched.

This example leverage existing TMF API as productCatalog, productOfferingQualification, shoppingCart, productOrder, etc... These APIs use will not be illustrated in this document (done within task execution).

These examples are only for illustration purposes, and they must not be considered as process guideline.

Process and Task Lifecycle


The proposed lifecycle has been inspired from the BPMN standard (Business Process Model and Notation), it outlines the various states a task or a process can transition through, including initiation, execution, possible interruption, and conclusion, with specific conditions guiding each transition.

State	Definition
Ready	The process or task is in a Ready state when it's ready to start but hasn't been initiated because necessary inputs are not yet provided.
Planned	The process or task is in a Planned state when it's been scheduled for later, once the start time is reached it could directly start or pass to Ready state if inputs are not yet provided.

© TM Forum 2026. All Rights Reserved.

State	Definition
Active	The process or task is initiated and is currently being executed. It is in progress and can transition to various other states based on different conditions.
Completed	The process or task has been successfully completed and all required actions have been fulfilled.
Withdrawn	The process or task is withdrawn by the user or system before completion. This could be due to a change in requirements or other external factors. It may be required to perform a rollback on the executed actions.
Terminated	The process or task has been forcibly stopped before it could be completed, often due to critical issues, errors, or conditions that make it impossible or unsafe to continue.
Failed	The process or task has failed to complete due to an unrecoverable error or condition.
Suspended	A temporary pause in process or task execution where activities are halted but can be resumed later.

© TM Forum 2026. All Rights Reserved.

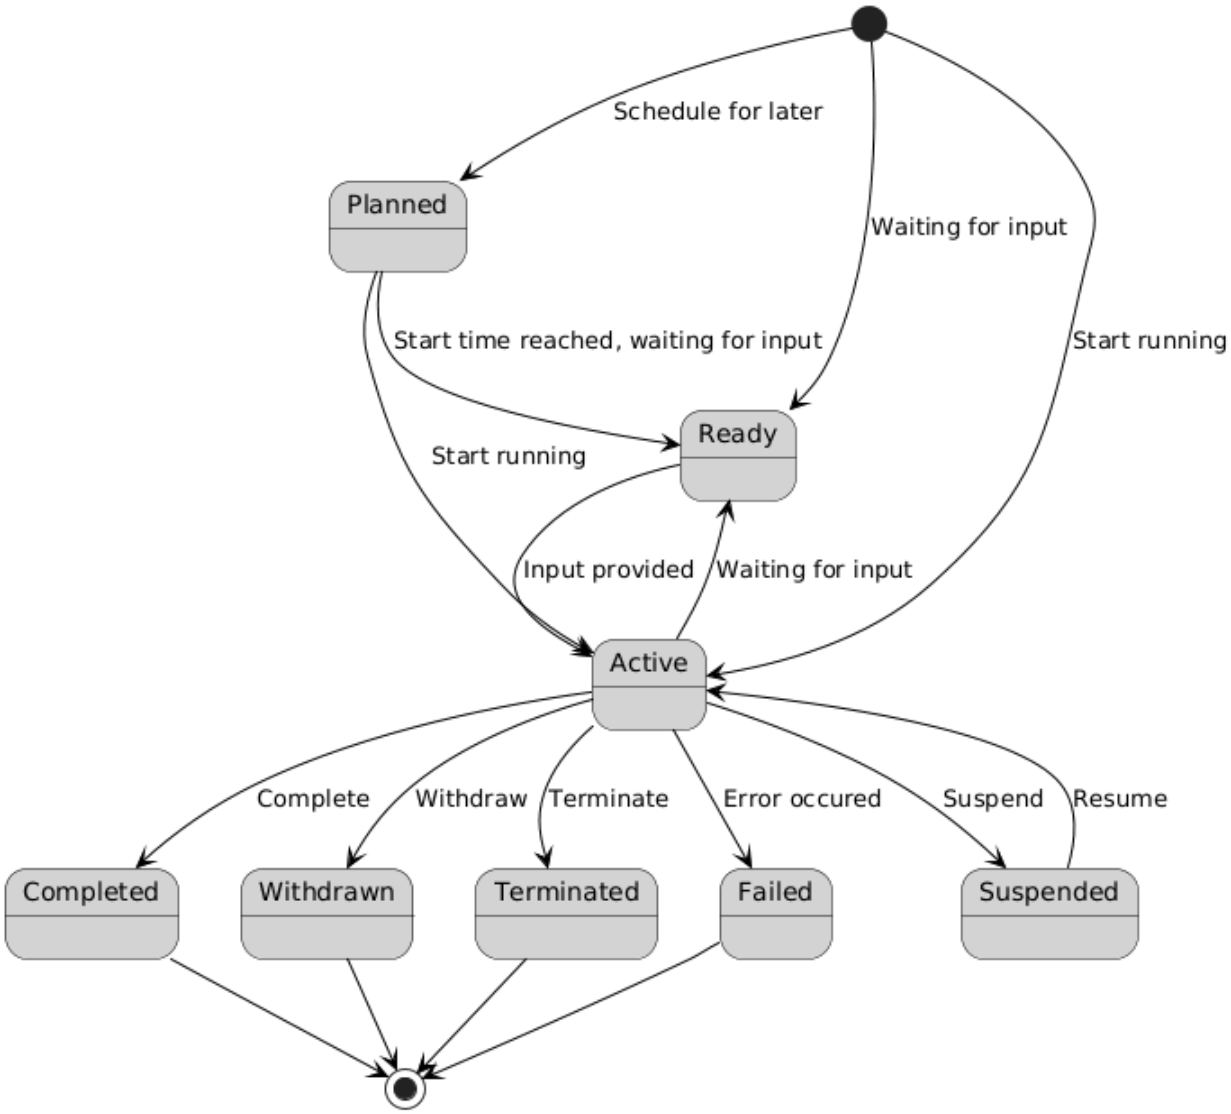

© TM Forum 2026. All Rights Reserved.


Illustration Use Case

This section aims to demonstrate the usage of the TMF701 Process Management API through a generic example. A simplified BPMN is utilized for illustration purposes, alongside JSON request and response messages. These messages showcase the use of TMF701 resources, specifically process and task .

Please note that the goal of this section is not to provide a fully compliant ODA UC. For a detailed description of fully compliant UCs, please refer to the TMF official document IG1228. This example is intended for illustrative purposes only.

© TM Forum 2026. All Rights Reserved.

Order Capture Use case

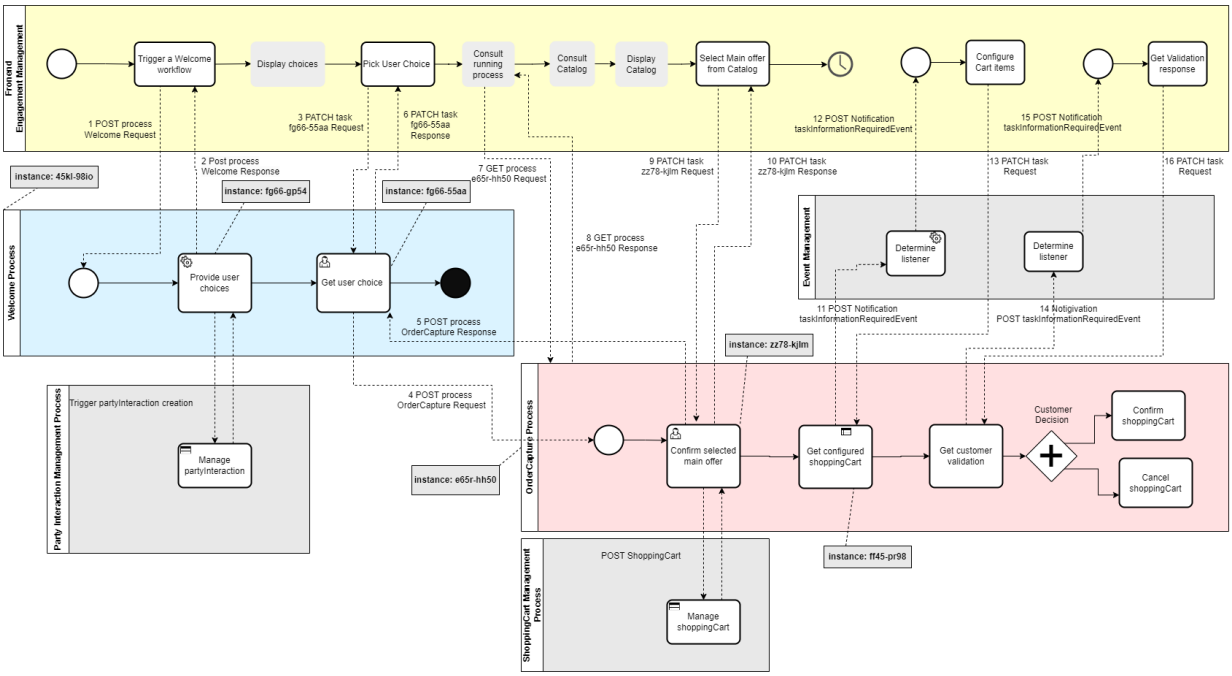


Several patterns are illustrated:

- **Synchronous interaction**: After a new party interaction on a Front End (FE), this later invokes the Back End (BE) to request what are the next possible actions (what is/are the action(s) available for this party in the context of this interaction). This flow is a synchronous request/response
- **Synchronous interaction featuring Process delegation**: Once the choice is confirmed by the user through the FE, the running process has to trigger another process which will be responsible to execute the requested choice. the BE has to provide all information to the FE seamlessly. This flow is a synchronous request/response.
- **Asynchronous Event-based interaction**: Later, during the configuration of the shopping cart, the running process has to manage a task. This task is asynchronous. An acknowledgement is sent to the FE. Once the task completed, the process triggers an event. the FE is identified as listener and get a notification about next task to be performed.

Illustration 1 – Synchronous interaction

BPMN View

© TM Forum 2026. All Rights Reserved.

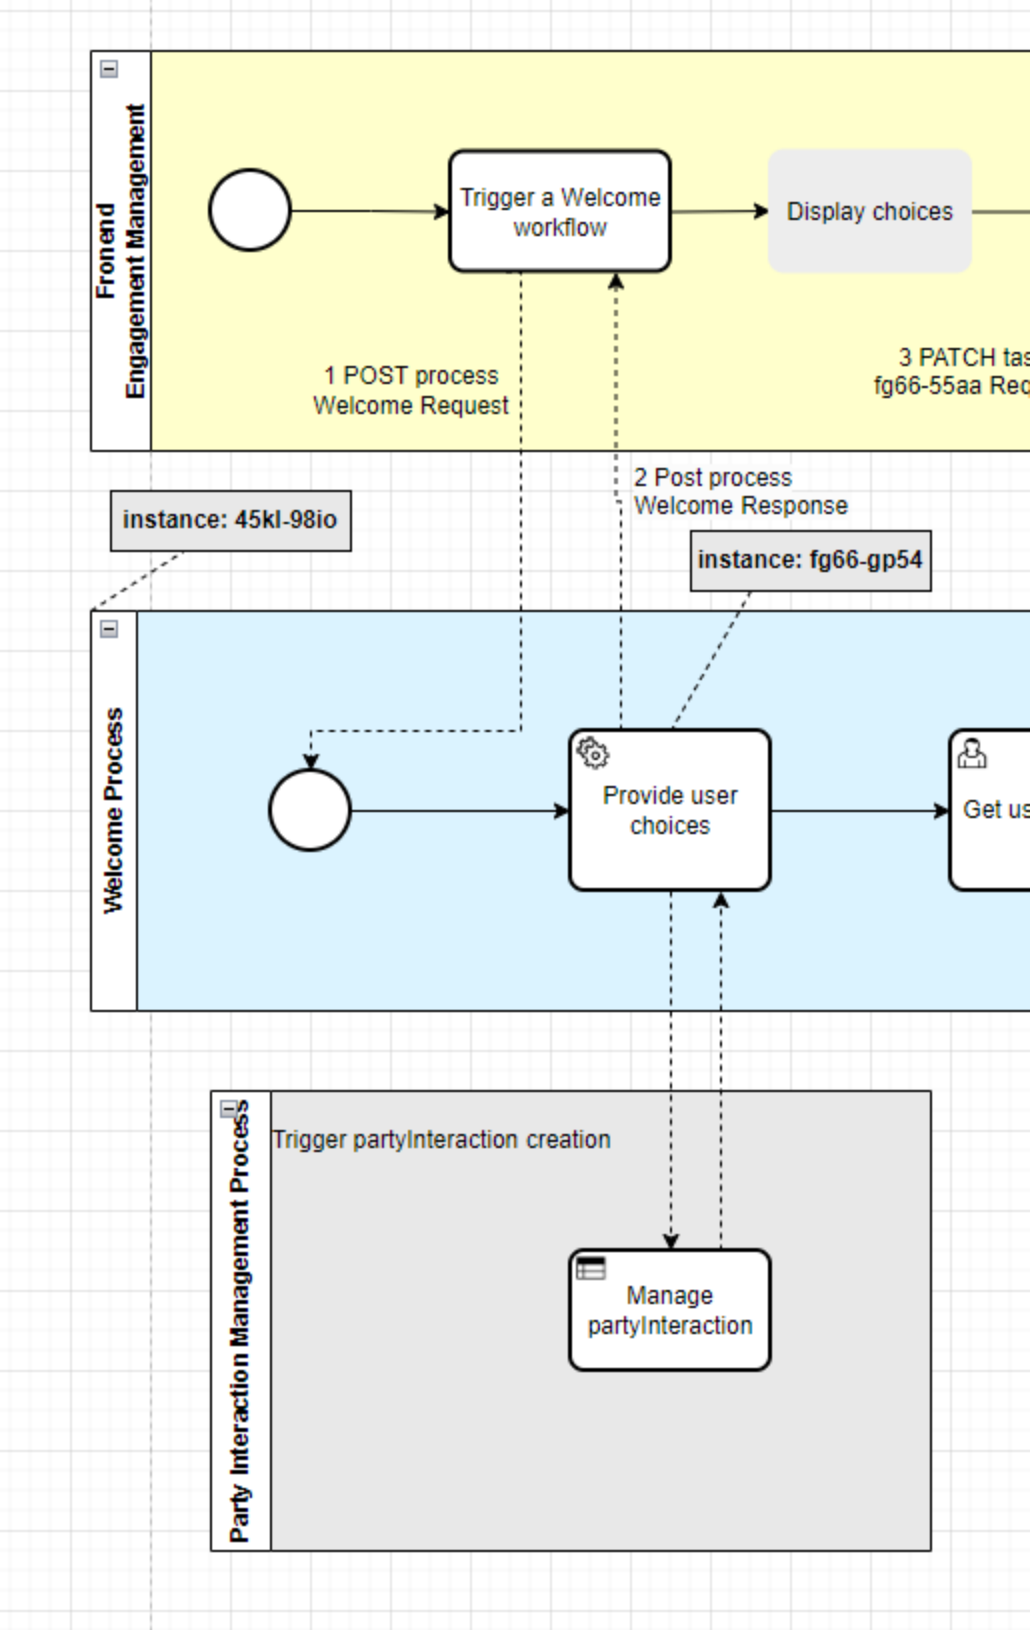

Flows description (flow 1 and 2):

© TM Forum 2026. All Rights Reserved.

A party initiates a session on the web. The frontend triggers a message to the backend to launch a welcome process. This process is launched and the BE sends directly in the response to the frontend the next task to be performed describing the list of actions available to the user 'to be proposed' to the party for this interaction context (depending on the channel, the requesting app, if the party is identified, etc…).

The processSpecification indicates the type of the process to be created. In order to transfer interaction context, the requester could use 3 substructures:

- Channel: the channel where the interaction is.
- relatedParty: it could be used to describe any individual or organization involved in this interaction (not present in this example), for example:
  - the customer if he/she is identified
  - the sales organization for a contact in retail
  - etc…
- relatedEntity: a generic structure to describe any other entity related to this interaction.

For this initialization, the FE is not 'guided' by a previous interaction and has to trigger a request to create a "Welcome process" (1 POST Process Welcome Request).

1 POST Process Welcome Request

```
POST  /process

{
  "channel": [
    {
      "id": "12",
      "name": "OnlineCRMapp",
      "href":" "https://www.mycsp.com/tmfapis/channel/12",
      "@type":"ChannelRef",
      "@referredType":"Channel"
    }
  ],
  "relatedParty": [
    {
      "role": "Customer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "456-f69",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-f69",
        "name": "Jean Pontus",
        "@referredType": "Individual",
        "@type": "PartyRef"
      }
    }
  ],
  "processSpecification": {
```

© TM Forum 2026. All Rights Reserved.

```
    "id": "12",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/12",
    "name": "Welcome",
    "@type": "ProcessSpecificationRef",
    "@referredType": "ProcessSpecification"
  },
  "@type":"Process"
}
```

This message triggers the creation of a new process instance (here the process 45kl-98io is created). The first task “Provide user choices” will have to trigger the following actions:

- Create a PartyInteraction to track this interaction with an id – We’ll trigger the PartyInteraction management process, asking the creation of new partyInteraction and getting partyInteraction.id in response
- Check and identify the list of processes available and allowed for this interaction context (Browse catalog, order capture, etc…) – the list of processes depends on a pre-defined rules and data provided as an input
- Provide response to the FE with following information:
  - Id of the process created
  - Id of the PartyInteraction created instance
  - List of available processes to display as a choices for the user
  - Description of the ‘task’ to update in order to provide the answer.

The answer will be something like the flow 2 (2 POST Process Welcome Response).

2 POST Process Welcome Response

```
201

{
  "id": "45kl-98io",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/45kl-98io",
  "creationDate": "2024-07-09T13:28:19.053Z",
  "channel": [
    {
      "id": "12",
      "name": "OnlineCRMapp",
      "href":" "https://www.mycsp.com/tmfapis/channel/12",
      "@type":"ChannelRef",
      "@referredType":"Channel"
    }
  ],
    "processSpecification": {
    "id": "12",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/12",
```

© TM Forum 2026. All Rights Reserved.

```
      "name": "Welcome",
      "@type": "ProcessSpecificationRef",
      "@referredType": "ProcessSpecification"
    },
    "relatedParty": [
      {
        "role": "Customer",
        "@type": "RelatedPartyRefOrPartyRoleRef",
        "partyOrPartyRole": {
          "id": "456-f69",
          "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-f69",
          "name": "Jean Pontus",
          "@referredType": "Individual",
          "@type": "PartyRef"
        }
      }
    ],
    "relatedEntity": [
      {
        "role": "Party Interaction",
        "@type": "RelatedEntity",
        "entity":
          {
            "id": "1",
            "name": "Online party interaction",
            "@type":"EntityRef",
            "@referredType" : "PartyInteraction"
          }
      }
    ],
    "state": "active",
    "task": [
      {
        "id": "fg66-gp54",
        "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/fg66-gp54",
        "@type":"Task",
        "state":"active",
        "taskType":"businessRuleTask",
        "taskCharacteristic":[
          {
            "modality":"output",
            "@type":"FlowCharacteristic",
            "characteristic":
              {
                "name": "User possible choices",
                "valueType": "string array",
                "@type":"StringArrayCharacteristic",
                "value":[
                  "OrderCapture",
                  "TroubleTicketCapture",
                  "CatalogBrowsing"
                ]
              }
          }
        ],
        "taskSpecification": {
            "id": "AA-53",
            "href":
  "https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/AA-53",
            "name": "Get user choice",
```


© TM Forum 2026. All Rights Reserved.

```
            "@type": "TaskSpecificationRef",
            "@referredType": "TaskSpecification"
          }
      },
      {
        "id": "fg66-55aa",
        "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/fg66-55aa",
        "state":"ready",
        "taskType":"userTask",
        "@type":"Task",
        "taskSpecification": {
            "id": "AA-54",
            "href":
 "https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/AA-54",
            "name": "Get user choice",
            "@type": "TaskSpecificationRef",
            "@referredType": "TaskSpecification"
          },
      }
    ],
    "@type": "Process"
 }
```



We retrieve here:

- the information provided in the request
- technical information about process resource creation like: id, href, creationDate, state, …
- the information about tasks:
  - technical information about instanciated tasks: id, href, state, …
  - characteristics of the tasks with the details if it's an input or an output or a contextual characteristic

Illustration 2 – Synchronous Process Transfer

BPMN View

© TM Forum 2026. All Rights Reserved.

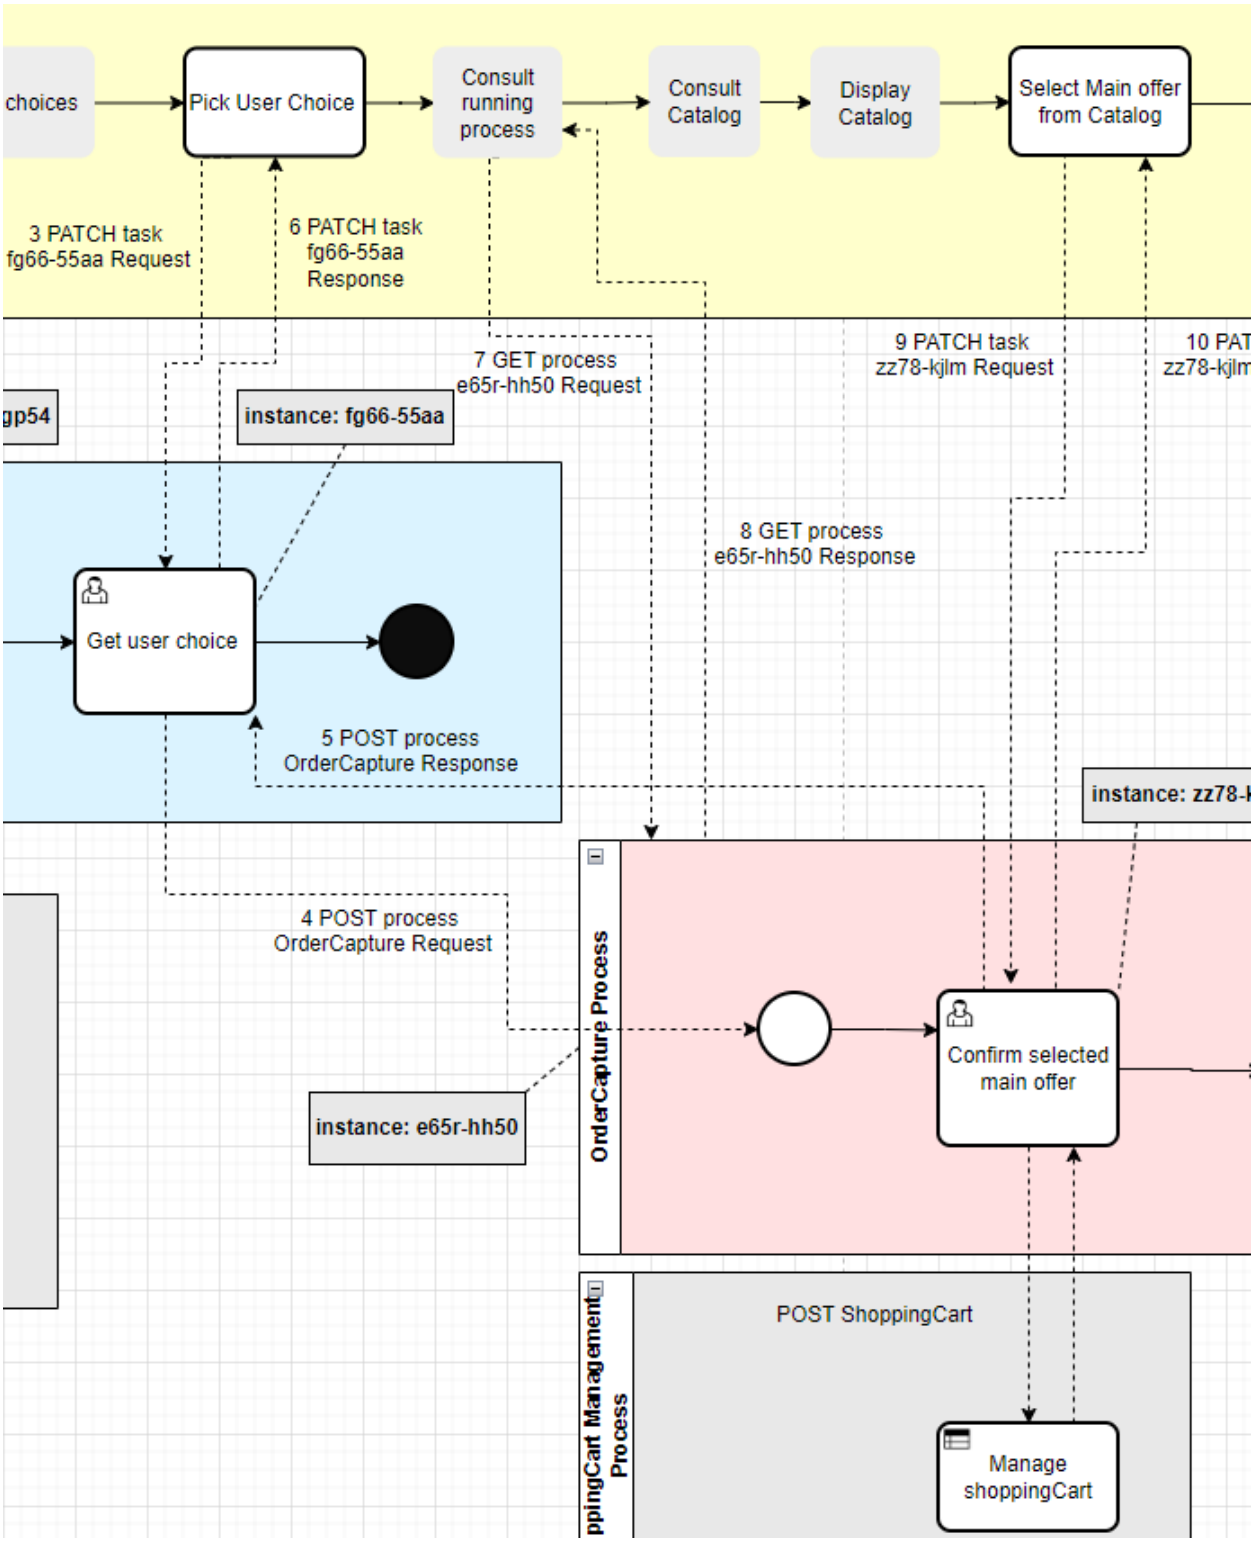

Flows description (flow 3, 4, 5 and 6):

The user on the front picks one choice, let's assume that he/she wants to order something. The Front End triggers the PATCH task of the instance fg66-55aa to indicate the user choice. In this example this choice will not be managed by the running welcome process

© TM Forum 2026. All Rights Reserved.

but another process flow needs to be triggered (in charge of order capture). The Welcome process triggers the Order Capture process. This one is initialized and its technical details are provided in the response (id, href, status, …). Welcome process gets this information and provides it to the Front End.

Based on the id and href, the Front End will be able to consult the order capture process and to get details about running tasks and how to proceed to continue the ordering.

3 PATCH task fg66-55aa Request

```
PATCH process/45kl-98io/task/fg66-55aa

{
  "taskCharacteristic": [
    {
        "modality":"input",
        "@type":"FlowCharacteristic",
        "characteristic":{
          "name": "User selected choice",
          "valueType": "string",
          "value":  "OrderCapture",
          "@type": "StringCharacteristic"
        }
    }
  ],
  "@type": "Task"
}
```

The main information here is the characteristic value, which will define the process wished by the user. In our example this choice will trigger a set of operations, described implicitly & explicitly in the previous bpmn diagram:

- Check process choice is valid
- Manage the choice – here a new process instance must be triggered to manage the order capture
- Order capture process is triggered and first tasks are ready to start: request main offer to confirm eligibility, start the configuration, and create a shoppingCart resource
- Once the order capture process is launched, the initial welcome process has to provide the information to the FE for the next interaction.
- Terminate Welcome process The order capture process launch is a backend to backend delegation. The welcome process will trigger the following message 4 POST process Order Capture.

4 POST process Order Capture Request

© TM Forum 2026. All Rights Reserved.

```
POST  /process

{
  "channel": [
    {
      "id": "12",
      "name": "OnlineCRMapp",
      "href":" "https://www.mycsp.com/tmfapis/channel/12",
      "@type":"ChannelRef",
      "@referredType":"Channel"
    }
  ],
  "processSpecification": {
    "id": "17",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/17",
    "name": "Order Capture",
    "@type": "ProcessSpecificationRef",
    "@referredType": "ProcessSpecification"
  },
  "relatedParty": [
    {
      "role": "Customer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "456-f69",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-f69",
        "name": "Jean Pontus",
        "@referredType": "Individual",
        "@type": "PartyRef"
      }
    }
  ],
    "relatedEntity": [
    {
      "role": "initiator",
      "@type": "RelatedEntity",
      "entity":
        {
          "id": "45kl-98io",
          "name": "Welcome process",
          "@type":"EntityRef",
          "@referredType" : "Process"
        }
    },
    {
      "role": "Party Interaction",
      "@type": "RelatedEntity",
      "entity":
        {
          "id": "1",
          "name": "Online party interaction",
          "@type":"EntityRef",
          "@referredType" : "PartyInteraction"
        }
    }
  ],
  "@type": "Process"
```

© TM Forum 2026. All Rights Reserved.

```
}
```

Note that in this example we leveraged relatedEntity structure to keep 'key' interaction information like the party interaction details. And get a synchronous response from the order capture process (in our example), but we can imagine to have an asynchronous response here with use of event/notification – in this case the FE will be advised of next task through a notification – described in the third illustration.

The response will be like "5 POST process Order Capture Response".

5 POST process Order Capture Response

```
{
  "id": "e65r-hh50",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/e65r-hh50",
  "creationDate": "2024-07-09T16:32:19.053Z",
  "channel": [
    {
      "id": "12",
      "name": "OnlineCRMapp",
      "href":" "https://www.mycsp.com/tmfapis/channel/12",
      "@type":"ChannelRef",
      "@referredType":"Channel"
    }
  ],
  "processSpecification": {
    "id": "17",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/17",
    "name": "Order Capture",
    "@type": "ProcessSpecificationRef",
    "@referredType": "ProcessSpecification"
  },
  "relatedParty": [
    {
      "role": "Customer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "456-f69",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-f69",
        "name": "Jean Pontus",
        "@referredType": "Individual",
        "@type": "PartyRef"
      }
    }
  ],
  "relatedEntity": [
    {
      "role": "initiator",
      "@type": "RelatedEntity",
      "entity":
        {
        "id": "45kl-98io",
        "name": "Welcome process",
```

© TM Forum 2026. All Rights Reserved.

```
        "@type":"EntityRef",
        "@referredType" : "Process"
        }
    },
    {
      "role": "Party Interaction",
      "@type": "RelatedEntity",
      "entity":
        {
        "id": "1",
        "name": "Online party interaction",
        "@type":"EntityRef",
        "@referredType" : "PartyInteraction"
        }
    }
  ],
  "state": "active",
  "task": [
    {
      "id": "zz78-kjlm",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/zz78-kjlm",
      "@type":"TaskRef",
      "@referredType": "Task"

    }
  ],
  "@type": "Process"
}
```


Here, the order capture process is initiated. The id and relationship with the welcome process flow will be communicated to the front end. The front end will then be able to consult the running order capture process details to determine the next steps.

6 PATCH task fg66-55aa Response


```
{
  "id": "fg66-55aa",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/fg66-55aa",
  "channel": [
    {
      "id": "12",
      "name": "OnlineCRMapp",
      "href":" "https://www.mycsp.com/tmfapis/channel/12",
      "@type":"ChannelRef",
      "@referredType":"Channel"
    }
  ],
  "taskSpecification": {
    "id": "AA-54",
    "href": "https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/AA-
54",
    "name": "Get user choice",
    "@type": "TaskSpecificationRef",
    "@referredType": "TaskSpecification"
  },
  "taskCharacteristic": [
```


© TM Forum 2026. All Rights Reserved.

```
    {
      "modality": "input",
      "@type": "FlowCharacteristic",
      "characteristic": {
        "name": "User Process Choice",
        "valueType": "string",
        "value": "Order Capture",
        "@type": "StringCharacteristic"
      }
    }
  ],
  "relatedEntity": [
    {
      "role": "Party Interaction",
      "@type": "RelatedEntity",
      "entity": {
        "id": "1",
        "name": "Online party interaction",
        "@type": "EntityRef",
        "@referredType": "PartyInteraction"
      }
    }
  ],
  "state": "active",
  "relatedProcess": [
    {
      "role": "nextProcess",
      "type": "RelatedProcess",
      "process": {
        "id": "e65r-hh50",
        "name": "Order Capture",
        "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/e65r-hh50",
        "@type": "ProcessRef",
        "@referredType": "Process"
      }
    }
  ],
  "@type": "Task"
}
```


The Front End will consult the running order capture process through a get on his href (flow 7), the reponse will be something like the flow 8 "Get process e65r-hh50 Response".

7 Get process e65r-hh50 Request

```
GET processManagement/process/e65r-hh50
```

8 Get process e65r-hh50 Response


```
{
  "id": "e65r-hh50",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/e65r-hh50",
  "creationDate": "2024-07-09T13:29:01.053Z",
  "channel": [
```


© TM Forum 2026. All Rights Reserved.

```
    {
      "id": "12",
      "name": "OnlineCRMapp",
      "href":" "https://www.mycsp.com/tmfapis/channel/12",
      "@type":"ChannelRef",
      "@referredType":"Channel"
    }
  ],
  "processSpecification": {
    "id": "17",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/17",
    "name": "OrderCapture",
    "@type": "ProcessSpecificationRef",
    "@referredType": "ProcessSpecification"
  },
  "relatedParty": [
    {
      "role": "Customer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "456-f69",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-f69",
        "name": "Jean Pontus",
        "@referredType": "Individual",
        "@type": "PartyRef"
      }
    }
  ],
  "relatedEntity": [
    {
      "role": "initiator",
      "type":"RelatedEntity",
      "entity":
        {
        "id": "45kl-98io",
        "name": "Welcome process",
        "@type":"EntityRef",
        "@referredType" : "Process"
        }
    },
    {
      "role": "Party Interaction",
      "entity":
        {
        "id": "1",
        "name": "Online party interaction",
        "@type":"EntityRef",
        "@referredType" : "PartyInteraction"
        }
    }
  ],
  "state": "active",
  "task": [
    {
      "id": "zz78-kjlm",
      "name":"Confirm selected offer",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/zz78-kjlm",
      "@type":"Task",
      "state":"ready",
```


© TM Forum 2026. All Rights Reserved.

```
      "taskType":"userTask",
      "taskSpecification": {
        "id": "TA-56",
        "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/TA-56",
        "name": "Confirm selected offer",
        "@type": "TaskSpecificationRef",
        "@referredType": "TaskSpecification"
      },

    }
  ],
  "@type": "Process"
}
```

The first task of the process remains in the 'ready' state, awaiting input from the orchestrator. The frontend (FE) should refer to the corresponding taskSpecification to identify which characteristics are mandatory inputs. Based on this, the FE will determine the appropriate next step: presenting catalog information to the user and prompting them to select an offer to initiate the cart configuration.

Once done, the process API is used by the FE to provide productOffering choice through the update of the task zz78-kjlm

Note: The href of the resource to be updated for this interaction points to a task within the Order Capture (OC) process, not the Welcome process.

9 PATCH task zz78-kjlm Request

```
{
  "taskCharacteristic":[
    {
      "modality":"input",
      "@type":"FlowCharacteristic",
      "characteristic":
        {
          "name": "Selected offer",
          "valueType": "object",
          "@type":"ObjectCharacteristic",
          "value":{
            "name":"Broadband001",
            "id":"Broadband001",

"href":"https://www.mycsp.com/tmfapis/catalogManagement/v5/productOffering/Broadband001
",
            "@type":"ProductOfferingRef",
            "@referredType":"ProductOffering"
          }
    }
    }
  ],
  "@type": "Task"
```

© TM Forum 2026. All Rights Reserved.

```
}
```

10 PATCH task zz78-kjlm Response

```
{
  "id": "zz78-kjlm",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/zz78-kjlm",
  "channel": [
    {
      "id": "12",
      "name": "OnlineCRMapp",
      "href":" "https://www.mycsp.com/tmfapis/channel/12",
      "@type":"ChannelRef",
      "@referredType":"Channel"
    }
  ],
  "taskSpecification": {
    "id": "BS-41",
    "href": "https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/BS-
41",
    "name": "Confirm selected offer",
    "@type": "TaskSpecificationRef",
    "@referredType": "TaskSpecification"
  },
  "relatedParty": [
    {
      "role": "Customer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "456-f69",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-f69",
        "name": "Jean Pontus",
        "@referredType": "Individual",
        "@type": "PartyRef"
      }
    }
  ],
  "taskCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristic",
      "characteristic": {
        "name": "Selected offer",
        "valueType": "object",
        "@type": "ObjectCharacteristic",
        "value": {
          "name": "Broadband001",
          "id": "Broadband001",
          "href":
"https://www.mycsp.com/tmfapis/catalogManagement/v5/productOffering/Broadband001",
          "@type": "ProductOfferingRef",
          "@referredType":"ProductOffering"
        }
      }
    }
  ],
  "state": "active",
```

© TM Forum 2026. All Rights Reserved.


```
   "taskRelationship": [
     {
       "relationshipType": "nextTask",
       "id": "ff45-pr98",
       "@referredType": "Task",
       "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/ff45-pr98",
       "@type": "TaskRelationship"
     }
   ],
   "@type": "Task"
 }
```


The response is immediate "10 PATCH task zz78-kjlm Response" with a 200 OK as a technical acknowledgment and a representation of the task resource is updated and sent back in the body.

Illustration 3 – Asynchronous Event-based interaction

BPMN View

© TM Forum 2026. All Rights Reserved.

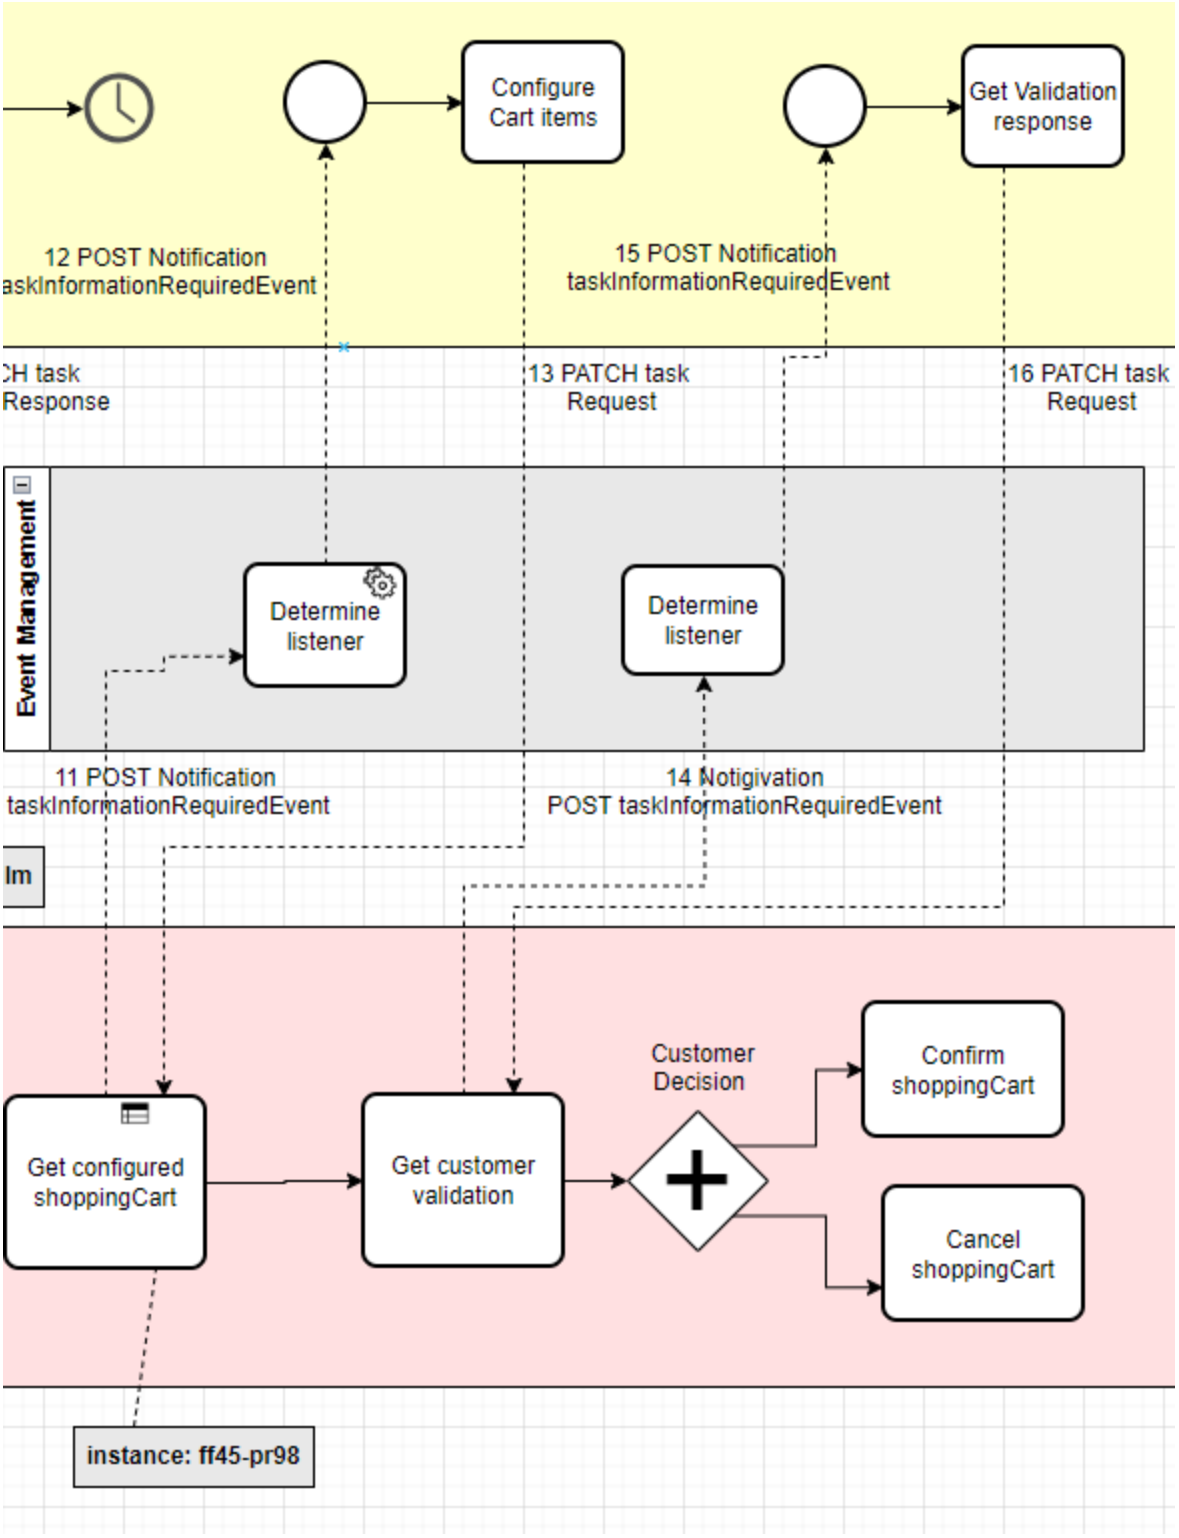

Once the FE helped the user to pick a main offer (it will use GET productOffering from the productCatalog API to retrieve catalog information and display them to the user), it will use the URL of the running task “Confirm selected main offer” provided by the 'order capture' process to update it with the selected offer. Once the task got this information, eligibility check could be performed and if fine the task could send an acknowledgment to the FE.

© TM Forum 2026. All Rights Reserved.

The offer choice allows moving to the next task 'Get configured shoppingCart'. In our illustration this task creation triggers an event (taskInformationRequiredEvent =□ ConfiguredCartRequired). This event is sent to an Event management component. This component get the event, retrieve event information and based on preconfigured rules, it will make the event available to the listener(s). Here we assumed the FE is already a presubscribed listener to this event type (taskInformationRequiredEvent).

The FE will recieve a notification including the related event information. With this information it will know about the next action to perform and with same pattern as the previous exchange.

The TMF688 event API (draft API targeted for v5) is used first to trigger from the OC process the (ConfiguredCartRequired) event.

11 POST Event - TaskInformationRequiredEvent

```
{
  "eventId": "sdf9-hjyr",
  "eventTime": "2024-07-09T15:52:49.679Z",
  "eventType": "TaskInformationRequiredEvent",
  "correlationId": "1",
  "title": "CartConfigurationExpected",
  "description": "Information required for Order Capture process - a configured cart
with price details is expected",
  "priority": "1",
  "timeOccurred": "2024-07-09T15:52:49.679Z",
  "event": {
    "task": {
      "id": "ff45-pr98",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/ff45-pr98",
      "@type": "Task"
    },
     "informationRequired":
    {
      "op": "add",
      "path": "/taskCharacteristic/characteristic/value?name=price"
    }
  }
}
```

The task information itself is embedded in the event payload.

The FE is a listener of taskInformationRequiredEvent event (with additional filtering). It will be notified through a 10 POST /listener/taskInformationRequiredEvent with the following payload:

12 POST /listener/taskInformationRequiredEvent

```
{
```

© TM Forum 2026. All Rights Reserved.

```
   "eventId": "sdf9-hjyr",
   "eventTime": "2024-07-09T15:52:49.679Z",
   "eventType": "TaskInformationRequiredEvent",
   "correlationId": "1",
   "title": "CartConfigurationExpected",
   "description": "Information required for Order Capture process - a configured cart
 with price details is expected",
   "priority": "1",
   "@type":"TaskInformationRequiredEvent",
   "@baseType": "Event",
   "timeOccurred": "2024-07-09T15:52:49.679Z",
   "event": {
     "task": {
       "id": "ff45-pr98",
       "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/ff45-pr98",
       "@type": "Task"
     },
      "informationRequired":
     {
       "op": "add",
       "path": "/taskCharacteristic/characteristic/value?name=price"
     }
   }
 }
```


© TM Forum 2026. All Rights Reserved.

Support of polymorphism and extension patterns

Support of polymorphic collections and types and schema based extension is provided by means of a list of generic meta-attributes that we describe below. Polymorphism in collections occurs when entities inherit from base entities, for instance a BillingAccount and SettlementAccount inheriting properties from the abstract Account entity.

Generic support of polymorphism and pattern extensions is described in the TMF API Guidelines, Part 2 TMF630.

The @type attribute provides a way to represent the actual class type of an entity. For example, within a list of Account instances some may be instances of BillingAccount where other could be instances of SettlementAccount. The @type gives this information. All resources and sub-resources of this API have a @type attributes that can be provided when this is useful.

The @referredType can be used within reference entities (like for instance an AccountRef object) to explicitly denote the actual entity type of the referred class. Notice that in reference entities the @type, when used, denotes the class type of the reference itself, such as BillingAccountRef or SettlementAccountRef, and not the class type of the referred object. However since reference classes are rarely sub-classed, @type is generally not useful in reference objects.

The @schemaLocation property can be used in resources to allow specifying user-defined properties of an Entity or to specify the expected characteristics of an entity.

The @baseType attribute gives a way to provide explicitly the base of class of a given resource that has been extended.

© TM Forum 2026. All Rights Reserved.

RESOURCE MODEL

Managed Entity and Task Resource Models

ProcessSpecification resource

ProcessSpecification is a class that allow to describe a process design. A process instance will use a ProcessSpecification as reference.

Resource model

© TM Forum 2026. All Rights Reserved.

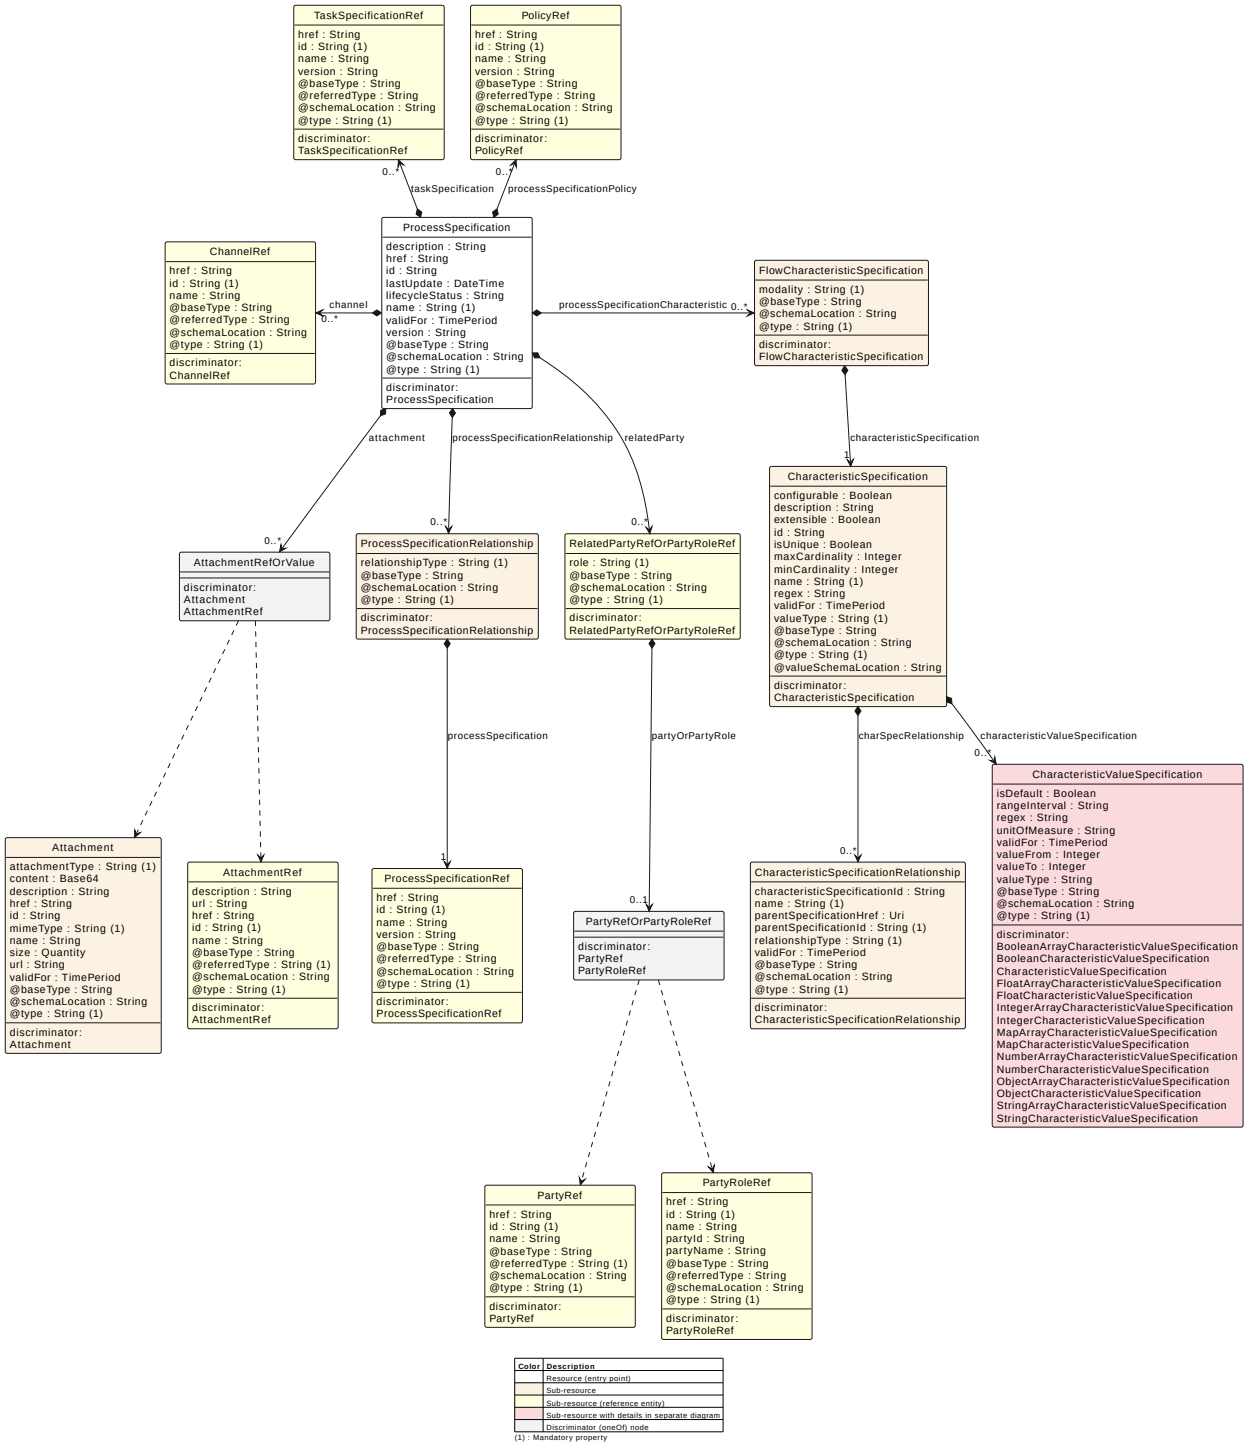


Figure 1 - ProcessSpecification

© TM Forum 2026. All Rights Reserved.

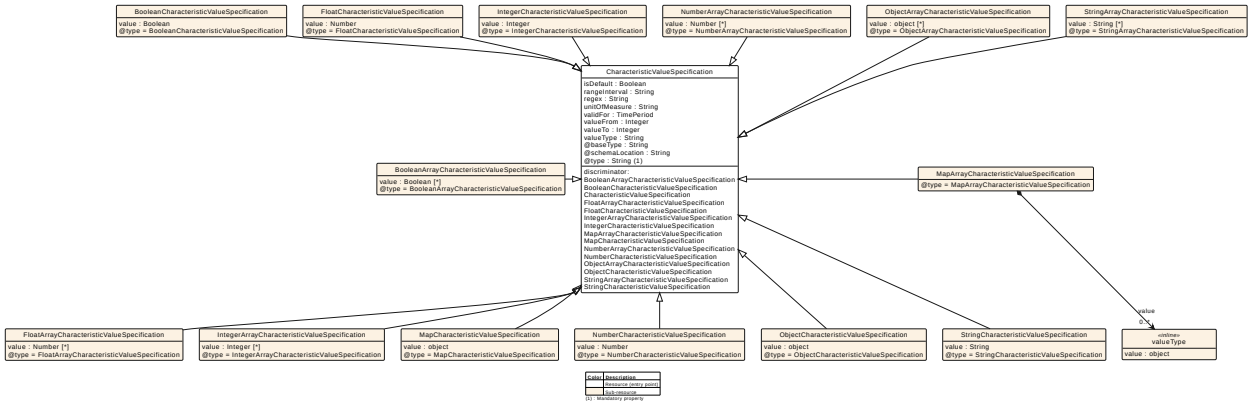


Figure 2 - CharacteristicValueSpecification

Field descriptions

ProcessSpecification fields

attachment	An AttachmentRefOrValue [0..*]. Attachments that are of relevance to this process specification, such as picture, document, media. This could be for example a how-to or a faq to explain this process specification.
channel	A ChannelRef [0..*]. A list of channels where Processes instantiated from this ProcessSpecification could be executed.
description	A String. Description of the process specification.
href	A String. Hyperlink reference.
id	A String. Unique identifier.
lastUpdate	A DateTime. Date and time of the last update of the process specification.
lifecycleStatus	A String. Used to indicate the current lifecycle status of this process specification, for example: draft, underReview, inProduction, released, deprecated.
name	A String [1]. Name given to the process specification.
processSpecificationCharacteristic	A FlowCharacteristicSpecification [0..*]. List of characteristics that the process specification can take.
processSpecificationPolicy	A PolicyRef [0..*]. A list of policies related to this process specification to dynamically reference and comply with predefined policies, for example for approval process, onboarding process or eligibility check tasks.

© TM Forum 2026. All Rights Reserved.

processSpecificationRelationship	A ProcessSpecificationRelationship [0..*]. A list of design-time policy links from the current ProcessSpecification to other ProcessSpecifications, declaring which instance-level relationships are permitted or expected via relationshipType (e.g., Trigger/BeTriggeredBy, DelegateTo/BeDelegatedBy, DependOn/RequiredBy).
relatedParty	A RelatedPartyRefOrPartyRoleRef [0..*]. Parties who manage or otherwise have an interest in this process Specification.
taskSpecification	A TaskSpecificationRef [0..*]. A list of task specifications that define the tasks that can potentially be instantiated within a process that is instantiated from this process specification.
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
version	A String. The process specification version.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

Attachment sub-resource fields

Complements the description of an element (for instance a product) through video, pictures...

attachmentType	A String [1]. A business characterization of the purpose of the attachment, for example logo, instructionManual, contractCopy.
content	A Base64. The actual contents of the attachment object, embedded inline and encoded as base64. Mutually exclusive with url.
description	A String. A narrative text describing the content of the attachment.
href	A String. Hyperlink reference.
id	A String. Unique identifier.

© TM Forum 2026. All Rights Reserved.

mimeType	A String [1]. A technical characterization of the attachment content format using an IETF Media Type, for example application/pdf or image/png. Note: this property is named mimeType for historical reasons.
name	A String. The name of the attachment.
size	A Quantity. An amount in a given unit.
url	A String. The URL pointing to the attachment content held in an external system, such as a content management system or document repository. Mutually exclusive with content.
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

AttachmentRef sub-resource fields

Attachment reference. An attachment complements the description of an element (for instance a product) through video, pictures.

~~description~~	DEPRECATED A String. A narrative text describing the content of the attachment. DEPRECATED: will be removed in v6.
href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
~~url~~	DEPRECATED A String. Link to the attachment media/content. DEPRECATED: will be removed in v6.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String [1]. The actual type of the target instance when needed for disambiguation.

© TM Forum 2026. All Rights Reserved.

@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ChannelRef sub-resource fields

The channel to which the resource reference to. e.g. channel for selling product offerings, channel for opening a trouble ticket etc..

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

FlowCharacteristicSpecification sub-resource fields

This class defines a characteristic specification.

characteristicSpecification	A CharacteristicSpecification [1]. This class defines a characteristic specification.
modality	A String [1]. Modality of use of this characteristic specification.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

CharacteristicSpecification sub-resource fields

This class defines a characteristic specification.

© TM Forum 2026. All Rights Reserved.

characteristicValueSpecification	A CharacteristicValueSpecification [0..*]. A CharacteristicValueSpecification object is used to define a set of attributes, each of which can be assigned to a corresponding set of attributes in a Characteristic Specification object. The values of the attributes in the CharacteristicValueSpecification object describe the values of the attributes that a corresponding Characteristic object can take on. CharacteristicValueSpecification can be instantiated as * BooleanArrayCharacteristicValueSpecification * BooleanCharacteristicValueSpecification * FloatArrayCharacteristicValueSpecification * FloatCharacteristicValueSpecification * IntegerArrayCharacteristicValueSpecification * IntegerCharacteristicValueSpecification * MapArrayCharacteristicValueSpecification * MapCharacteristicValueSpecification * NumberArrayCharacteristicValueSpecification * NumberCharacteristicValueSpecification * ObjectArrayCharacteristicValueSpecification * ObjectCharacteristicValueSpecification * StringArrayCharacteristicValueSpecification * StringCharacteristicValueSpecification
charSpecRelationship	A CharacteristicSpecificationRelationship [0..*]. An aggregation, migration, substitution, dependency or exclusivity relationship between/among Specification Characteristics.
configurable	A Boolean. If true, the Boolean indicates that the target Characteristic is configurable.
description	A String. A narrative that explains the Characteristic Specification.
extensible	A Boolean. An indicator that specifies that the values for the characteristic can be extended by adding new values when instantiating a characteristic for a resource.
id	A String. Unique ID for the characteristic.

© TM Forum 2026. All Rights Reserved.

isUnique	A Boolean. Specifies if the value of this characteristic is unique across all entities instantiated from the specification that uses this characteristic. For example, consider a ProductSpecification for a set-top box, with a CharacteristicSpecification cardID. Each set-top box must have a different value for cardID, so this isUnique attribute would be set to true for the characteristic.
maxCardinality	An Integer. The maximum number of instances a CharacteristicValue can take on. For example, zero to five phone numbers in a group calling plan, where five is the value for the maxCardinality.
minCardinality	An Integer. The minimum number of instances a CharacteristicValue can take on. For example, zero to five phone numbers in a group calling plan, where zero is the value for the minCardinality.
name	A String [1]. A word, term, or phrase by which this characteristic specification is known and distinguished from other characteristic specifications.
regex	A String. A rule or principle represented in regular expression used to derive the value of a characteristic value.
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
valueType	A String [1]. A kind of value that the characteristic can take on, such as numeric, text and so forth.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.
@valueSchemaLocation	A String. This (optional) field provides a link to the schema describing the value type.

CharacteristicValueSpecification sub-resource fields

Specification of a value (number or text or an object) that can be assigned to a Characteristic. This is an abstract base class, the actual value is in one of the strongly-typed subclasses : BooleanArrayCharacteristicValueSpecification, BooleanCharacteristic

© TM Forum 2026. All Rights Reserved.

ValueSpecification, FloatArrayCharacteristicValueSpecification, FloatCharacteristicValueSpecification, IntegerArrayCharacteristicValueSpecification, IntegerCharacteristicValueSpecification, MapArrayCharacteristicValueSpecification, Map CharacteristicValueSpecification, NumberArrayCharacteristicValueSpecification, Number CharacteristicValueSpecification, ObjectArrayCharacteristicValueSpecification, Object CharacteristicValueSpecification, StringArrayCharacteristicValueSpecification, String CharacteristicValueSpecification...

isDefault	A Boolean. If true, the Boolean Indicates if the value is the default value for a characteristic.
rangeInterval	A String. An indicator that specifies the inclusion or exclusion of the valueFrom and valueTo attributes. If applicable, possible values are "open", "closed", "closed Bottom" and "closedTop".
regex	A String. A regular expression constraint for given value.
unitOfMeasure	A String. A length, surface, volume, dry measure, liquid measure, money, weight, time, and the like. In general, a determinate quantity or magnitude of the kind designated, taken as a standard of comparison for others of the same kind, in assigning to them numerical values, as 1 foot, 1 yard, 1 mile, 1 square foot.
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
valueFrom	An Integer. The low range value that a characteristic can take on.
valueTo	An Integer. The upper range value that a characteristic can take on.
valueType	A String. A kind of value that the characteristic value can take on, such as numeric, text and so forth.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

© TM Forum 2026. All Rights Reserved.

	CharacteristicValueSpecification can be instantiated as * BooleanArrayCharacteristicValueSpecification * BooleanCharacteristicValueSpecification * FloatArrayCharacteristicValueSpecification * FloatCharacteristicValueSpecification * IntegerArrayCharacteristicValueSpecification * IntegerCharacteristicValueSpecification * MapArrayCharacteristicValueSpecification * MapCharacteristicValueSpecification * NumberArrayCharacteristicValueSpecification * NumberCharacteristicValueSpecification * ObjectArrayCharacteristicValueSpecification * ObjectCharacteristicValueSpecification * StringArrayCharacteristicValueSpecification * StringCharacteristicValueSpecification
value	This property is present in subclasses

BooleanArrayCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is an array booleans.

isDefault	A Boolean. If true, the Boolean Indicates if the value is the default value for a characteristic.
rangeInterval	A String. An indicator that specifies the inclusion or exclusion of the valueFrom and valueTo attributes. If applicable, possible values are "open", "closed", "closed Bottom" and "closedTop".
regex	A String. A regular expression constraint for given value.
unitOfMeasure	A String. A length, surface, volume, dry measure, liquid measure, money, weight, time, and the like. In general, a determinate quantity or magnitude of the kind designated, taken as a standard of comparison for others of the same kind, in assigning to them numerical values, as 1 foot, 1 yard, 1 mile, 1 square foot.
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
value	A Boolean [0..*]. Characteristic specification item boolean value.

© TM Forum 2026. All Rights Reserved.

valueFrom	An Integer. The low range value that a characteristic can take on.
valueTo	An Integer. The upper range value that a characteristic can take on.
valueType	A String. A kind of value that the characteristic value can take on, such as numeric, text and so forth.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

BooleanCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is a boolean.

isDefault	A Boolean. If true, the Boolean Indicates if the value is the default value for a characteristic.
rangeInterval	A String. An indicator that specifies the inclusion or exclusion of the valueFrom and valueTo attributes. If applicable, possible values are "open", "closed", "closed Bottom" and "closedTop".
regex	A String. A regular expression constraint for given value.
unitOfMeasure	A String. A length, surface, volume, dry measure, liquid measure, money, weight, time, and the like. In general, a determinate quantity or magnitude of the kind designated, taken as a standard of comparison for others of the same kind, in assigning to them numerical values, as 1 foot, 1 yard, 1 mile, 1 square foot.
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
value	A Boolean. Value of the characteristic.
valueFrom	An Integer. The low range value that a characteristic can take on.
valueTo	An Integer. The upper range value that a characteristic can take on.

© TM Forum 2026. All Rights Reserved.

valueType	A String. A kind of value that the characteristic value can take on, such as numeric, text and so forth.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

FloatArrayCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is a number array of format floating point.

isDefault	A Boolean. If true, the Boolean Indicates if the value is the default value for a characteristic.
rangeInterval	A String. An indicator that specifies the inclusion or exclusion of the valueFrom and valueTo attributes. If applicable, possible values are "open", "closed", "closed Bottom" and "closedTop".
regex	A String. A regular expression constraint for given value.
unitOfMeasure	A String. A length, surface, volume, dry measure, liquid measure, money, weight, time, and the like. In general, a determinate quantity or magnitude of the kind designated, taken as a standard of comparison for others of the same kind, in assigning to them numerical values, as 1 foot, 1 yard, 1 mile, 1 square foot.
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
value	A Float [0..*]. Characteristic value.
valueFrom	An Integer. The low range value that a characteristic can take on.
valueTo	An Integer. The upper range value that a characteristic can take on.
valueType	A String. A kind of value that the characteristic value can take on, such as numeric, text and so forth.
@baseType	A String. When sub-classing, this defines the super-class.

© TM Forum 2026. All Rights Reserved.

@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

FloatCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is a floating point number.

isDefault	A Boolean. If true, the Boolean Indicates if the value is the default value for a characteristic.
rangeInterval	A String. An indicator that specifies the inclusion or exclusion of the valueFrom and valueTo attributes. If applicable, possible values are "open", "closed", "closed Bottom" and "closedTop".
regex	A String. A regular expression constraint for given value.
unitOfMeasure	A String. A length, surface, volume, dry measure, liquid measure, money, weight, time, and the like. In general, a determinate quantity or magnitude of the kind designated, taken as a standard of comparison for others of the same kind, in assigning to them numerical values, as 1 foot, 1 yard, 1 mile, 1 square foot.
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
value	A Float. Value of the characteristic.
valueFrom	An Integer. The low range value that a characteristic can take on.
valueTo	An Integer. The upper range value that a characteristic can take on.
valueType	A String. A kind of value that the characteristic value can take on, such as numeric, text and so forth.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

© TM Forum 2026. All Rights Reserved.

IntegerArrayCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is a number array of format integer.

isDefault	A Boolean. If true, the Boolean Indicates if the value is the default value for a characteristic.
rangeInterval	A String. An indicator that specifies the inclusion or exclusion of the valueFrom and valueTo attributes. If applicable, possible values are "open", "closed", "closed Bottom" and "closedTop".
regex	A String. A regular expression constraint for given value.
unitOfMeasure	A String. A length, surface, volume, dry measure, liquid measure, money, weight, time, and the like. In general, a determinate quantity or magnitude of the kind designated, taken as a standard of comparison for others of the same kind, in assigning to them numerical values, as 1 foot, 1 yard, 1 mile, 1 square foot.
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
value	An Integer [0..*]. Characteristic value.
valueFrom	An Integer. The low range value that a characteristic can take on.
valueTo	An Integer. The upper range value that a characteristic can take on.
valueType	A String. A kind of value that the characteristic value can take on, such as numeric, text and so forth.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

IntegerCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is an integer number.

isDefault	A Boolean. If true, the Boolean Indicates if the value is the default value for a characteristic.

© TM Forum 2026. All Rights Reserved.

rangeInterval	A String. An indicator that specifies the inclusion or exclusion of the valueFrom and valueTo attributes. If applicable, possible values are "open", "closed", "closed Bottom" and "closedTop".
regex	A String. A regular expression constraint for given value.
unitOfMeasure	A String. A length, surface, volume, dry measure, liquid measure, money, weight, time, and the like. In general, a determinate quantity or magnitude of the kind designated, taken as a standard of comparison for others of the same kind, in assigning to them numerical values, as 1 foot, 1 yard, 1 mile, 1 square foot.
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
value	An Integer. Value of the characteristic.
valueFrom	An Integer. The low range value that a characteristic can take on.
valueTo	An Integer. The upper range value that a characteristic can take on.
valueType	A String. A kind of value that the characteristic value can take on, such as numeric, text and so forth.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

MapArrayCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is an array of mapped objects.

isDefault	A Boolean. If true, the Boolean Indicates if the value is the default value for a characteristic.
rangeInterval	A String. An indicator that specifies the inclusion or exclusion of the valueFrom and valueTo attributes. If applicable, possible values are "open", "closed", "closed Bottom" and "closedTop".
regex	A String. A regular expression constraint for given value.

© TM Forum 2026. All Rights Reserved.

unitOfMeasure	A String. A length, surface, volume, dry measure, liquid measure, money, weight, time, and the like. In general, a determinate quantity or magnitude of the kind designated, taken as a standard of comparison for others of the same kind, in assigning to them numerical values, as 1 foot, 1 yard, 1 mile, 1 square foot.
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
value	A valueType [0..*].
valueFrom	An Integer. The low range value that a characteristic can take on.
valueTo	An Integer. The upper range value that a characteristic can take on.
valueType	A String. A kind of value that the characteristic value can take on, such as numeric, text and so forth.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

valueType sub-resource fields

NOTE value is defined inline and valueType is a generated identifier used for referencing.

value	A valueType_2.

MapCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is a mapped object.

isDefault	A Boolean. If true, the Boolean Indicates if the value is the default value for a characteristic.
rangeInterval	A String. An indicator that specifies the inclusion or exclusion of the valueFrom and valueTo attributes. If applicable, possible values are "open", "closed", "closed Bottom" and "closedTop".

© TM Forum 2026. All Rights Reserved.

regex	A String. A regular expression constraint for given value.
unitOfMeasure	A String. A length, surface, volume, dry measure, liquid measure, money, weight, time, and the like. In general, a determinate quantity or magnitude of the kind designated, taken as a standard of comparison for others of the same kind, in assigning to them numerical values, as 1 foot, 1 yard, 1 mile, 1 square foot.
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
value	A valueType_3. Value of the characteristic.
valueFrom	An Integer. The low range value that a characteristic can take on.
valueTo	An Integer. The upper range value that a characteristic can take on.
valueType	A String. A kind of value that the characteristic value can take on, such as numeric, text and so forth.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

NumberArrayCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is a number array with no specific format.

isDefault	A Boolean. If true, the Boolean Indicates if the value is the default value for a characteristic.
rangeInterval	A String. An indicator that specifies the inclusion or exclusion of the valueFrom and valueTo attributes. If applicable, possible values are "open", "closed", "closed Bottom" and "closedTop".
regex	A String. A regular expression constraint for given value.

© TM Forum 2026. All Rights Reserved.

unitOfMeasure	A String. A length, surface, volume, dry measure, liquid measure, money, weight, time, and the like. In general, a determinate quantity or magnitude of the kind designated, taken as a standard of comparison for others of the same kind, in assigning to them numerical values, as 1 foot, 1 yard, 1 mile, 1 square foot.
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
value	A Number [0..*]. Characteristic value.
valueFrom	An Integer. The low range value that a characteristic can take on.
valueTo	An Integer. The upper range value that a characteristic can take on.
valueType	A String. A kind of value that the characteristic value can take on, such as numeric, text and so forth.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

NumberCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is a number of no specific format.

isDefault	A Boolean. If true, the Boolean Indicates if the value is the default value for a characteristic.
rangeInterval	A String. An indicator that specifies the inclusion or exclusion of the valueFrom and valueTo attributes. If applicable, possible values are "open", "closed", "closed Bottom" and "closedTop".
regex	A String. A regular expression constraint for given value.

© TM Forum 2026. All Rights Reserved.

unitOfMeasure	A String. A length, surface, volume, dry measure, liquid measure, money, weight, time, and the like. In general, a determinate quantity or magnitude of the kind designated, taken as a standard of comparison for others of the same kind, in assigning to them numerical values, as 1 foot, 1 yard, 1 mile, 1 square foot.
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
value	A Number. Value of the characteristic.
valueFrom	An Integer. The low range value that a characteristic can take on.
valueTo	An Integer. The upper range value that a characteristic can take on.
valueType	A String. A kind of value that the characteristic value can take on, such as numeric, text and so forth.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ObjectArrayCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is an array of objects.

isDefault	A Boolean. If true, the Boolean Indicates if the value is the default value for a characteristic.
rangeInterval	A String. An indicator that specifies the inclusion or exclusion of the valueFrom and valueTo attributes. If applicable, possible values are "open", "closed", "closed Bottom" and "closedTop".
regex	A String. A regular expression constraint for given value.

© TM Forum 2026. All Rights Reserved.

unitOfMeasure	A String. A length, surface, volume, dry measure, liquid measure, money, weight, time, and the like. In general, a determinate quantity or magnitude of the kind designated, taken as a standard of comparison for others of the same kind, in assigning to them numerical values, as 1 foot, 1 yard, 1 mile, 1 square foot.
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
value	A valueType_4 [0..*]. Collection of characteristic values.
valueFrom	An Integer. The low range value that a characteristic can take on.
valueTo	An Integer. The upper range value that a characteristic can take on.
valueType	A String. A kind of value that the characteristic value can take on, such as numeric, text and so forth.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ObjectCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is any object.

isDefault	A Boolean. If true, the Boolean Indicates if the value is the default value for a characteristic.
rangeInterval	A String. An indicator that specifies the inclusion or exclusion of the valueFrom and valueTo attributes. If applicable, possible values are "open", "closed", "closed Bottom" and "closedTop".
regex	A String. A regular expression constraint for given value.

© TM Forum 2026. All Rights Reserved.

unitOfMeasure	A String. A length, surface, volume, dry measure, liquid measure, money, weight, time, and the like. In general, a determinate quantity or magnitude of the kind designated, taken as a standard of comparison for others of the same kind, in assigning to them numerical values, as 1 foot, 1 yard, 1 mile, 1 square foot.
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
value	A valueType_5. Value of the characteristic.
valueFrom	An Integer. The low range value that a characteristic can take on.
valueTo	An Integer. The upper range value that a characteristic can take on.
valueType	A String. A kind of value that the characteristic value can take on, such as numeric, text and so forth.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

StringArrayCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is an array of strings.

isDefault	A Boolean. If true, the Boolean Indicates if the value is the default value for a characteristic.
rangeInterval	A String. An indicator that specifies the inclusion or exclusion of the valueFrom and valueTo attributes. If applicable, possible values are "open", "closed", "closed Bottom" and "closedTop".
regex	A String. A regular expression constraint for given value.

© TM Forum 2026. All Rights Reserved.

unitOfMeasure	A String. A length, surface, volume, dry measure, liquid measure, money, weight, time, and the like. In general, a determinate quantity or magnitude of the kind designated, taken as a standard of comparison for others of the same kind, in assigning to them numerical values, as 1 foot, 1 yard, 1 mile, 1 square foot.
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
value	A String [0..*]. Characteristic value.
valueFrom	An Integer. The low range value that a characteristic can take on.
valueTo	An Integer. The upper range value that a characteristic can take on.
valueType	A String. A kind of value that the characteristic value can take on, such as numeric, text and so forth.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

StringCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is a string.

isDefault	A Boolean. If true, the Boolean Indicates if the value is the default value for a characteristic.
rangeInterval	A String. An indicator that specifies the inclusion or exclusion of the valueFrom and valueTo attributes. If applicable, possible values are "open", "closed", "closed Bottom" and "closedTop".
regex	A String. A regular expression constraint for given value.

© TM Forum 2026. All Rights Reserved.

unitOfMeasure	A String. A length, surface, volume, dry measure, liquid measure, money, weight, time, and the like. In general, a determinate quantity or magnitude of the kind designated, taken as a standard of comparison for others of the same kind, in assigning to them numerical values, as 1 foot, 1 yard, 1 mile, 1 square foot.
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
value	A String. Value of the characteristic.
valueFrom	An Integer. The low range value that a characteristic can take on.
valueTo	An Integer. The upper range value that a characteristic can take on.
valueType	A String. A kind of value that the characteristic value can take on, such as numeric, text and so forth.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

CharacteristicSpecificationRelationship sub-resource fields

An aggregation, migration, substitution, dependency or exclusivity relationship between/ among Characteristic specifications. The specification characteristic is embedded within the specification whose ID and href are in this entity, and identified by its ID.

characteristicSpecificationId	A String. Unique identifier of the characteristic within the specification.
name	A String [1]. Name of the target characteristic within the specification.
parentSpecificationHref	A Uri. Hyperlink reference to the parent specification containing the target characteristic.
parentSpecificationId	A String [1]. Unique identifier of the parent specification containing the target characteristic.
relationshipType	A String [1]. Type of relationship such as aggregation, migration, substitution, dependency, exclusivity.

© TM Forum 2026. All Rights Reserved.

validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

PolicyRef sub-resource fields

Reference to managed Policy object.

href	A String. Hyperlink reference.
id	A String [1]. Unique identifier.
name	A String. Name of the referred entity.
version	A String.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ProcessSpecificationRelationship sub-resource fields

A relationship (triggers, delegates, etc...) between/among process specifications.

processSpecification	A ProcessSpecificationRef [1]. A reference to a process specification defined on design time.
relationshipType	A String [1]. Type of relationship such as triggers, delegates, etc.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.

© TM Forum 2026. All Rights Reserved.

@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ProcessSpecificationRef sub-resource fields

A reference to a process specification defined on design time.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
version	A String. The version of the referred process specification.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

RelatedPartyRefOrPartyRoleRef sub-resource fields

RelatedParty reference. A related party defines party or party role or its reference, linked to a specific entity.

partyOrPartyRole	A PartyRefOrPartyRoleRef.
role	A String [1]. Role played by the related party or party role in the context of the specific entity it is linked to. Such as 'initiator', 'customer', 'salesAgent', 'user'.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

PartyRef sub-resource fields

A Party reference.

© TM Forum 2026. All Rights Reserved.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String [1]. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. ENUMERATED with values: * PartyRef

PartyRoleRef sub-resource fields

Party role reference. A party role represents the part played by a party in a given context.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
partyId	A String. The identifier of the engaged party that is linked to the PartyRole object.
partyName	A String. The name of the engaged party that is linked to the PartyRole object.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. ENUMERATED with values: * PartyRoleRef

TaskSpecificationRef sub-resource fields

A reference to a TaskSpecification defined on design-time.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.

© TM Forum 2026. All Rights Reserved.

name	A String. Name of the referred entity.
version	A String. The version of the referred task specification.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

Json representation sample(s)

We provide below a JSON representation as example of the 'ProcessSpecification' resource object.


```
{
  "id": "OC54",
  "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC54",
  "lifecycleStatus": "onDesign",
  "version": "1",
  "lastUpdate": "2023-12-30T09:42:25.747Z",
  "name": "orderCapture",
  "description": "Description of the order capture process for all channels",
  "attachment": [
    {
      "attachmentType": "ProcessDocumentation",
      "description": "description of the business process with examples",
      "mimeType": "application/pdf",
      "name": "pfs-1-doc",
      "url": "https://mycsp.com/content/4aafacbd-11ff-4dc8-b445-305f2215715f",
      "size": {
        "amount": 2423,
        "units": "Mb"
      },
      "validFor": {
        "startDateTime": "2030-04-10T23:20:50.52Z"
      },
      "@type": "Attachment"
    }
  ],
  "processSpecificationCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristicSpecification",
      "characteristicSpecification": {
        "configurable": true,
        "description": "product offering that the customer wishes to have",
        "extensible": false,
        "isUnique": false,
```


© TM Forum 2026. All Rights Reserved.

```
        "maxCardinality": 1,
        "minCardinality": 0,
        "valueType": "object",
        "name": "productOfferingRef",
        "@type": "CharacteristicSpecification"
      }
    }
  ],
  "relatedParty": [
    {
      "role": "designer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "4cf-mg1",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-mg1",
        "name": "Simon Clement",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    },
    {
      "role": "approver",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "fp5-559",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/fp5-559",
        "name": "Kate Noman",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    }
  ],
  "taskSpecification": [
    {
      "id": "tfs99",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs99",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs0",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs1",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs2",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs2",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
```


© TM Forum 2026. All Rights Reserved.

```
    },
    {
      "id": "tfs3",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs3",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    }
  ],
  "@type": "ProcessSpecification"
}
```


Process resource

A standardized way to execute and monitor business or technical processes in a telco or digital service provider environment.

Resource model

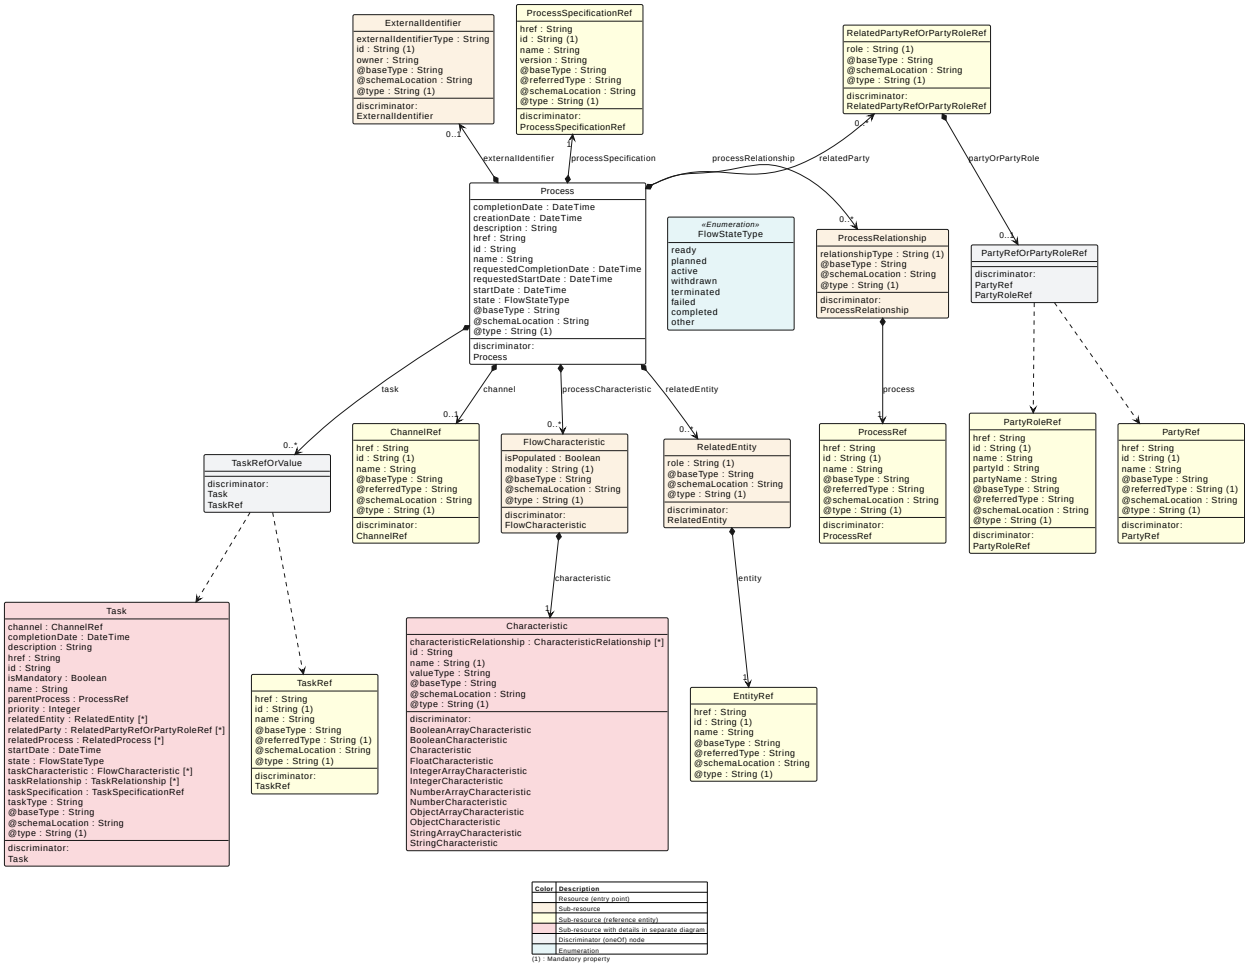


Figure 3 - Process

© TM Forum 2026. All Rights Reserved.

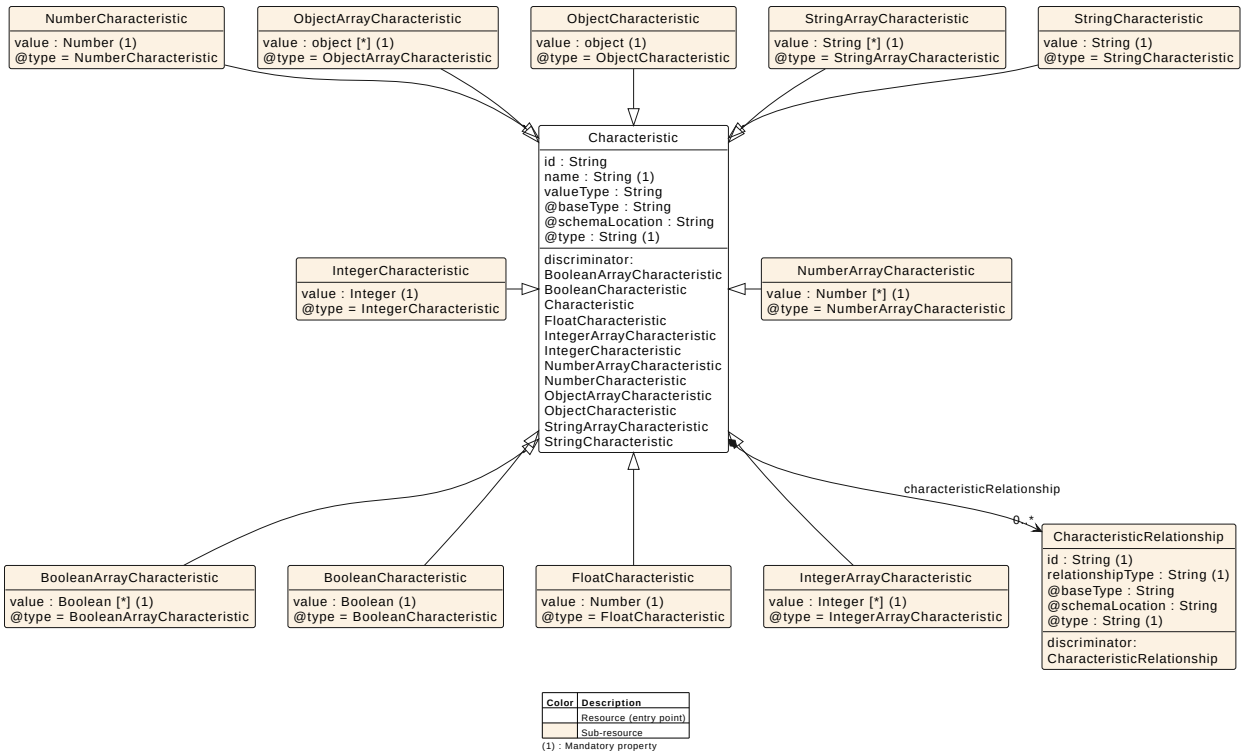


Figure 4 - Characteristic

Field descriptions

Process fields

channel	A ChannelRef. The channel to which the resource reference to. e.g. channel for selling product offerings, channel for opening a trouble ticket etc..
completionDate	A DateTime. Effective completion date for this process.
creationDate	A DateTime. Is the date when the process was created (timestamp).
description	A String. Description of the process.

© TM Forum 2026. All Rights Reserved.

externalIdentifier	An ExternalIdentifier. An identification of an entity that is owned by or originates in a software system different from the current system, for example a ProductOrder handed off from a commerce platform into an order handling system. The structure identifies the system itself, the nature of the entity within the system (e.g. class name) and the unique ID of the entity within the system. It is anticipated that multiple external IDs can be held for a single entity, e.g. if the entity passed through multiple systems on the way to the current system. In this case the consumer is expected to sequence the IDs in the array in reverse order of provenance, i.e. most recent system first in the list.
href	A String. Hyperlink reference.
id	A String. Unique identifier.
name	A String. The name of the process.
processCharacteristic	A FlowCharacteristic [0..*]. A list of characteristic(s) associated to this process, capturing contextual information such as parameters, conditions, or configuration values that may influence its execution, such us priority, retryLimit, or qualityRate.
processRelationship	A ProcessRelationship [0..*]. A list of links connecting the current process to other process instances, with relationshipType specifying the nature of each relationship (e.g., triggers/triggeredBy, delegates/ delegatedBy, dependsOn/requiredBy).
processSpecification	A ProcessSpecificationRef [1]. A reference to a process specification defined on design time.
relatedEntity	A RelatedEntity [0..*]. A list of related entity(ies) to this process.
relatedParty	A RelatedPartyRefOrPartyRoleRef [0..*]. A list of related party(ies) to this process.
requestedCompletionDate	A DateTime. Requested completion date for this process.
requestedStartDate	A DateTime. Requested start date for this process.
startDate	A DateTime. Effective start date for this process.

© TM Forum 2026. All Rights Reserved.

state	A FlowStateType. Possible values for the state of the Flow. ENUMERATED with values: * ready * planned * active * withdrawn * terminated * failed * completed * other
task	A TaskRefOrValue [0..*]. A list of taskRef or task values related to this process.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ChannelRef sub-resource fields

The channel to which the resource reference to. e.g. channel for selling product offerings, channel for opening a trouble ticket etc..

See [ChannelRef] for details.

ExternalIdentifier sub-resource fields

An identification of an entity that is owned by or originates in a software system different from the current system, for example a ProductOrder handed off from a commerce platform into an order handling system. The structure identifies the system itself, the nature of the entity within the system (e.g. class name) and the unique ID of the entity within the system. It is anticipated that multiple external IDs can be held for a single entity, e.g. if the entity passed through multiple systems on the way to the current system. In this case the consumer is expected to sequence the IDs in the array in reverse order of provenance, i.e. most recent system first in the list.

externalIdentifierType	A String. Type of the identification, typically would be the type of the entity within the external system.
id	A String [1]. Identification of the entity within the external system.

© TM Forum 2026. All Rights Reserved.

owner	A String. Name of the external system that owns the entity.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

FlowCharacteristic sub-resource fields

Describes a given characteristic of a flow through a name/value pair. This is an abstract base class, the actual value is in one of the strongly-typed subclasses : String Characteristic, ObjectCharacteristic, FloatCharacteristic, BooleanCharacteristic, Number Characteristic, IntegerCharacteristic, StringArrayCharacteristic, ObjectArrayCharacteristic, BooleanArrayCharacteristic, NumberArrayCharacteristic, IntegerArrayCharacteristic...

characteristic	A Characteristic [1]. Describes a given characteristic of an object or entity through a name/value pair. This is an abstract base class, the actual value is in one of the strongly-typed subclasses : StringCharacteristic, ObjectCharacteristic, FloatCharacteristic, BooleanCharacteristic, NumberCharacteristic, IntegerCharacteristic, StringArrayCharacteristic, ObjectArrayCharacteristic, BooleanArrayCharacteristic, NumberArrayCharacteristic, IntegerArrayCharacteristic... Characteristic can be instantiated as * BooleanArrayCharacteristic * BooleanCharacteristic * FloatCharacteristic * IntegerArrayCharacteristic * IntegerCharacteristic * NumberArrayCharacteristic * NumberCharacteristic * ObjectArrayCharacteristic * ObjectCharacteristic * StringArrayCharacteristic * StringCharacteristic
isPopulated	A Boolean. A boolean to indicate if the characteristic is populated or not.

© TM Forum 2026. All Rights Reserved.

modality	A String [1]. Modality of use of this characteristic, it could be for example input, output, informational or contextual.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

Characteristic sub-resource fields

Describes a given characteristic of an object or entity through a name/value pair. This is an abstract base class, the actual value is in one of the strongly-typed subclasses : String Characteristic, ObjectCharacteristic, FloatCharacteristic, BooleanCharacteristic, Number Characteristic, IntegerCharacteristic, StringArrayCharacteristic, ObjectArrayCharacteristic, BooleanArrayCharacteristic, NumberArrayCharacteristic, IntegerArrayCharacteristic...

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.
	Characteristic can be instantiated as * BooleanArrayCharacteristic * BooleanCharacteristic * FloatCharacteristic * IntegerArrayCharacteristic * IntegerCharacteristic * NumberArrayCharacteristic * NumberCharacteristic * ObjectArrayCharacteristic * ObjectCharacteristic * StringArrayCharacteristic * StringCharacteristic

© TM Forum 2026. All Rights Reserved.

value	This property is present in subclasses

CharacteristicRelationship sub-resource fields

Another Characteristic that is related to the current Characteristic;.

id	A String [1]. Unique identifier of the characteristic.
relationshipType	A String [1]. The type of relationship.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

BooleanArrayCharacteristic sub-resource fields

A characteristic which value is an array of Boolean(s).

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
value	A Boolean [1..*]. A characteristic which value is an array of Boolean(s).
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

BooleanCharacteristic sub-resource fields

A characteristic which value is a Boolean.

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.

© TM Forum 2026. All Rights Reserved.

name	A String [1]. Name of the characteristic.
value	A Boolean [1]. Value of the characteristic.
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

FloatCharacteristic sub-resource fields

A characteristic which value is a Float.

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
value	A Float [1]. Value of the characteristic.
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

IntegerArrayCharacteristic sub-resource fields

A characteristic which value is an array of Integer(s).

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
value	An Integer [1..*]. A characteristic which value is an array of Integer(s).
valueType	A String. Data type of the value of the characteristic.

© TM Forum 2026. All Rights Reserved.

@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

IntegerCharacteristic sub-resource fields

A characteristic which value is a Integer.

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
value	An Integer [1]. Value of the characteristic.
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

NumberArrayCharacteristic sub-resource fields

A characteristic which value is an array of Number(s).

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
value	A Number [1..*]. A characteristic which value is an array of Number(s).
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.

© TM Forum 2026. All Rights Reserved.

@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

NumberCharacteristic sub-resource fields

A characteristic which value is a Number.

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
value	A Number [1]. Value of the characteristic.
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ObjectArrayCharacteristic sub-resource fields

A characteristic which value is an array of Object(s).

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
value	A valueType [1..*]. Collection of characteristic values.
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

valueType sub-resource fields

© TM Forum 2026. All Rights Reserved.

Characteristic value.

See [valueType] for details.

ObjectCharacteristic sub-resource fields

A characteristic which value is a Object.

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
value	A valueType_2 [1]. Value of the characteristic.
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

valueType_2 sub-resource fields

Value of the characteristic.

See [valueType_2] for details.

StringArrayCharacteristic sub-resource fields

A characteristic which value is an array of String(s).

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
value	A String [1..*]. Collection of string characteristics.
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.

© TM Forum 2026. All Rights Reserved.

@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

StringCharacteristic sub-resource fields

A characteristic which value is a String.

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
value	A String [1]. Value of the characteristic.
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ProcessRelationship sub-resource fields

Describes links from the current Process to other Process instances by specifying a relationship type (e.g., triggers/triggeredBy, delegates/delegatedBy, dependsOn/required By).

process	A ProcessRef [1]. Reference to a process object.
relationshipType	A String [1]. Type of relationship between processes such as triggers/triggeredBy, delegates/delegatedBy, depends On/requiredBy, etc.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ProcessRef sub-resource fields

© TM Forum 2026. All Rights Reserved.

Reference to a process object.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ProcessSpecificationRef sub-resource fields

A reference to a process specification defined on design time.

See [ProcessSpecificationRef] for details.

RelatedEntity sub-resource fields

A reference to an entity, where the type of the entity is not known in advance.

entity	An EntityRef [1]. Entity reference schema to be use for all entityRef class.
role	A String [1].
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

EntityRef sub-resource fields

Entity reference schema to be use for all entityRef class.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.

© TM Forum 2026. All Rights Reserved.

name	A String. Name of the referred entity.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

RelatedPartyRefOrPartyRoleRef sub-resource fields

RelatedParty reference. A related party defines party or party role or its reference, linked to a specific entity.

See [RelatedPartyRefOrPartyRoleRef] for details.

PartyRef sub-resource fields

A Party reference.

See [PartyRef] for details.

PartyRoleRef sub-resource fields

Party role reference. A party role represents the part played by a party in a given context.

See [PartyRoleRef] for details.

Task sub-resource fields

A task is an atomic or composite activity that represents a unit of work, that could be stand alone or belonging to a process, manual or automated, performed by a person, system, or external entity.

channel	A ChannelRef. The channel to which the resource reference to. e.g. channel for selling product offerings, channel for opening a trouble ticket etc..
completionDate	A DateTime. Effective completion date for this process.
description	A String. Indicated the description of the task: atomic or composite, stand alone or belonging to a process, manual or automated, and any relevant information.

© TM Forum 2026. All Rights Reserved.

href	A String. Hyperlink reference.
id	A String. Unique identifier.
isMandatory	A Boolean. Indicates whether the task must be completed before the process can continue, as defined by the process logic or engine.
name	A String. The name of the task.
parentProcess	A ProcessRef. Reference to a process object.
priority	An Integer. Indicates task urgency level for execution order and resource allocation; may be defined and interpreted by internal process logic or orchestration engines.
relatedEntity	A RelatedEntity [0..*]. A list of related entity(ies) to this task, for example entity(ies) that have been created or updated by this task (a shoppingCart, a productOrder, an individual).
relatedParty	A RelatedPartyRefOrPartyRoleRef [0..*]. A list of related party(ies) to this task.
relatedProcess	A RelatedProcess [0..*]. A relationship to an external process other than the process that contains this task, the relationship could be: triggers, isUpdatedBy, synchronizedWith, monitors, dependsOn, associatedTo, ...
startDate	A DateTime. Effective start date for this process.
state	A FlowStateType. Possible values for the state of the Flow. ENUMERATED with values: * ready * planned * active * withdrawn * terminated * failed * completed * other
taskCharacteristic	A FlowCharacteristic [0..*]. A list of characteristic(s) associated to this task.

© TM Forum 2026. All Rights Reserved.

taskRelationship	A TaskRelationship [0..*]. A list of tasks related to this task, relationships between tasks could be: triggers, isParallel With, dependsOn, ...
taskSpecification	A TaskSpecificationRef. A reference to a TaskSpecification defined on design-time.
taskType	A String. The type of the task, the BPMN standard distinguish different types of tasks like sendTask, receive Task, userTask, manualTask, scriptTask, businessRuleTask.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

RelatedProcess sub-resource fields

A reference to an external process which can be triggered, stopped or updated by the current task.

process	A ProcessRef [1]. Reference to a process object.
role	A String [1].
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

TaskRelationship sub-resource fields

Describes relationship between tasks.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
relationshipType	A String [1]. The type of tasks relationship (requires, triggers, etc.).
@baseType	A String. When sub-classing, this defines the super-class.

© TM Forum 2026. All Rights Reserved.

@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

TaskSpecificationRef sub-resource fields

A reference to a TaskSpecification defined on design-time.

See [TaskSpecificationRef] for details.

TaskRef sub-resource fields

A reference to a Task object.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

Json representation sample(s)

We provide below a JSON representation as example of the 'Process' resource object.


```
{
  "id": "4fd-ty56-gg55",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-gg55",
  "creationDate": "2024-04-11T14:52:21.823Z",
  "state": "active",
  "channel": {
    "id": "1",
    "href": "https://www.mycsp.com/tmfapis/channel/1",
    "name": "TMFWebStore",
    "@type": "ChannelRef",
    "@referredType": "Channel"
```


© TM Forum 2026. All Rights Reserved.

```
  },
  "processSpecification": {
    "id": "OC54",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC54",
    "name": "orderCapture",
    "@type": "ProcessSpecificationRef",
    "@referredType": "ProcessSpecification"
  },
  "relatedParty": [
    {
      "role": "Customer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "456-f69",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-f69",
        "name": "Jean Pontus",
        "@referredType": "Individual",
        "@type": "PartyRef"
      }
    }
  ],
  "processCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristic",
      "characteristic": {
        "valueType": "object",
        "name": "Offer name",
        "@type": "ObjectCharacteristic",
        "value": {
          "name": "TMFMobile20",
          "id": "TMFMobile20",
          "href":
"https://www.mycsp.com/tmfapis/productCatalog/v5/productOffering/TMFMobile20",
          "@type": "ProductOfferingRef",
          "@referredType": "ProductOffering"
        }
      }
    }
  ],
  "task": [
    {
      "id": "4fd-ty56-gg55-2",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
2",
      "@type": "TaskRef",
      "@referredType": "Task"
    },
    {
      "id": "4fd-ty56-gg55-3",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
3",
      "@type": "TaskRef",
      "@referredType": "Task"
    },
    {
      "id": "4fd-ty56-gg55-4",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
4",
```


© TM Forum 2026. All Rights Reserved.

```
      "@type": "TaskRef",
      "@referredType": "Task"
    },
    {
      "id": "4fd-ty56-gg55-5",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
5",
      "@type": "TaskRef",
      "@referredType": "Task"
    }
  ],
  "@type": "Process",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/process.json"
}
```


Task resource

A task is an atomic or composite activity that represents a unit of work, that could be stand alone or belonging to a process, manual or automated, performed by a person, system, or external entity.

Resource model

© TM Forum 2026. All Rights Reserved.

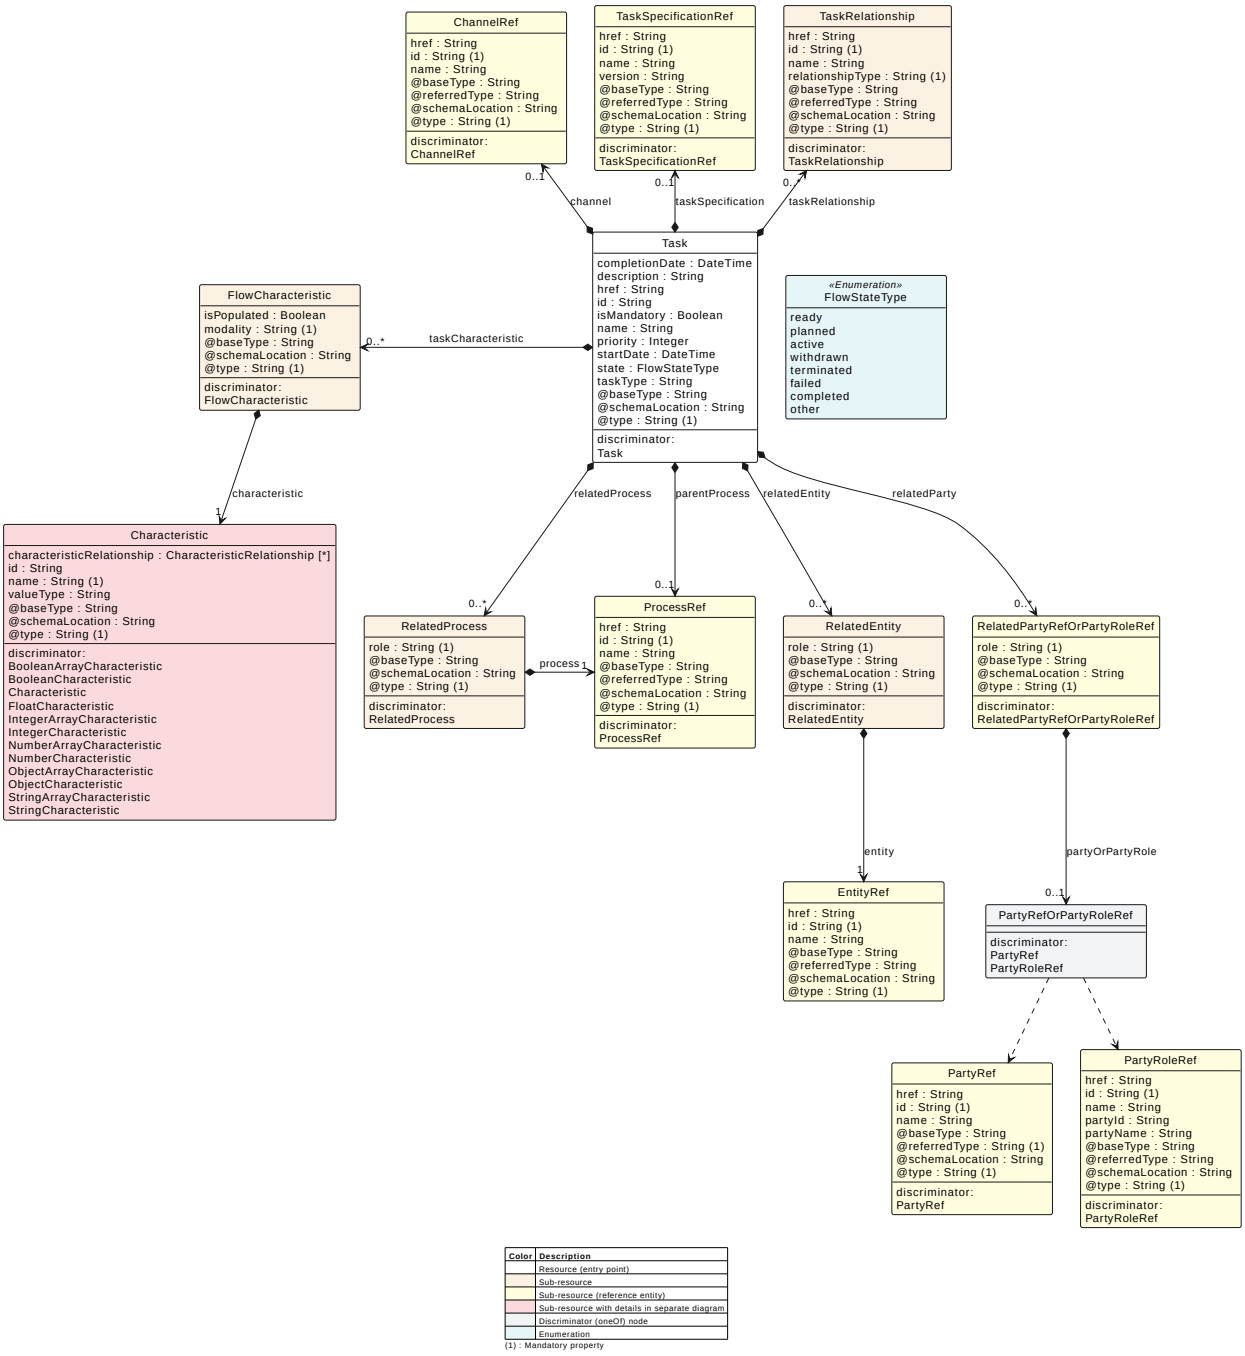


Figure 5 - Task

See Figure 4 for Characteristic diagrams.

Field descriptions

Task fields

© TM Forum 2026. All Rights Reserved.

channel	A ChannelRef. The channel to which the resource reference to. e.g. channel for selling product offerings, channel for opening a trouble ticket etc..
completionDate	A DateTime. Effective completion date for this process.
description	A String. Indicated the description of the task: atomic or composite, stand alone or belonging to a process, manual or automated, and any relevant information.
href	A String. Hyperlink reference.
id	A String. Unique identifier.
isMandatory	A Boolean. Indicates whether the task must be completed before the process can continue, as defined by the process logic or engine.
name	A String. The name of the task.
parentProcess	A ProcessRef. Reference to a process object.
priority	An Integer. Indicates task urgency level for execution order and resource allocation; may be defined and interpreted by internal process logic or orchestration engines.
relatedEntity	A RelatedEntity [0..*]. A list of related entity(ies) to this task, for example entity(ies) that have been created or updated by this task (a shoppingCart, a productOrder, an individual).
relatedParty	A RelatedPartyRefOrPartyRoleRef [0..*]. A list of related party(ies) to this task.
relatedProcess	A RelatedProcess [0..*]. A relationship to an external process other than the process that contains this task, the relationship could be: triggers, isUpdatedBy, synchronizedWith, monitors, dependsOn, associatedTo, ...
startDate	A DateTime. Effective start date for this process.

© TM Forum 2026. All Rights Reserved.

state	A FlowStateType. Possible values for the state of the Flow. ENUMERATED with values: * ready * planned * active * withdrawn * terminated * failed * completed * other
taskCharacteristic	A FlowCharacteristic [0..*]. A list of characteristic(s) associated to this task.
taskRelationship	A TaskRelationship [0..*]. A list of tasks related to this task, relationships between tasks could be: triggers, isParallel With, dependsOn, ...
taskSpecification	A TaskSpecificationRef. A reference to a TaskSpecification defined on design-time.
taskType	A String. The type of the task, the BPMN standard distinguish different types of tasks like sendTask, receive Task, userTask, manualTask, scriptTask, businessRuleTask.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ChannelRef sub-resource fields

The channel to which the resource reference to. e.g. channel for selling product offerings, channel for opening a trouble ticket etc..

See [ChannelRef] for details.

ProcessRef sub-resource fields

Reference to a process object.

See [ProcessRef] for details.

RelatedEntity sub-resource fields

© TM Forum 2026. All Rights Reserved.

A reference to an entity, where the type of the entity is not known in advance.

See [RelatedEntity] for details.

EntityRef sub-resource fields

Entity reference schema to be use for all entityRef class.

See [EntityRef] for details.

RelatedPartyRefOrPartyRoleRef sub-resource fields

RelatedParty reference. A related party defines party or party role or its reference, linked to a specific entity.

See [RelatedPartyRefOrPartyRoleRef] for details.

PartyRef sub-resource fields

A Party reference.

See [PartyRef] for details.

PartyRoleRef sub-resource fields

Party role reference. A party role represents the part played by a party in a given context.

See [PartyRoleRef] for details.

RelatedProcess sub-resource fields

A reference to an external process which can be triggered, stopped or updated by the current task.

See [RelatedProcess] for details.

FlowCharacteristic sub-resource fields

Describes a given characteristic of a flow through a name/value pair. This is an abstract base class, the actual value is in one of the strongly-typed subclasses : String Characteristic, ObjectCharacteristic, FloatCharacteristic, BooleanCharacteristic, Number Characteristic, IntegerCharacteristic, StringArrayCharacteristic, ObjectArrayCharacteristic, BooleanArrayCharacteristic, NumberArrayCharacteristic, IntegerArrayCharacteristic...

See [FlowCharacteristic] for details.

© TM Forum 2026. All Rights Reserved.

Characteristic sub-resource fields

Describes a given characteristic of an object or entity through a name/value pair. This is an abstract base class, the actual value is in one of the strongly-typed subclasses : String Characteristic, ObjectCharacteristic, FloatCharacteristic, BooleanCharacteristic, Number Characteristic, IntegerCharacteristic, StringArrayCharacteristic, ObjectArrayCharacteristic, BooleanArrayCharacteristic, NumberArrayCharacteristic, IntegerArrayCharacteristic...

See [Characteristic] for details.

CharacteristicRelationship sub-resource fields

Another Characteristic that is related to the current Characteristic;.

See [CharacteristicRelationship] for details.

BooleanArrayCharacteristic sub-resource fields

A characteristic which value is an array of Boolean(s).

See [BooleanArrayCharacteristic] for details.

BooleanCharacteristic sub-resource fields

A characteristic which value is a Boolean.

See [BooleanCharacteristic] for details.

FloatCharacteristic sub-resource fields

A characteristic which value is a Float.

See [FloatCharacteristic] for details.

IntegerArrayCharacteristic sub-resource fields

A characteristic which value is an array of Integer(s).

See [IntegerArrayCharacteristic] for details.

IntegerCharacteristic sub-resource fields

A characteristic which value is a Integer.

See [IntegerCharacteristic] for details.

NumberArrayCharacteristic sub-resource fields

© TM Forum 2026. All Rights Reserved.

A characteristic which value is an array of Number(s).

See [NumberArrayCharacteristic] for details.

NumberCharacteristic sub-resource fields

A characteristic which value is a Number.

See [NumberCharacteristic] for details.

ObjectArrayCharacteristic sub-resource fields

A characteristic which value is an array of Object(s).

See [ObjectArrayCharacteristic] for details.

valueType sub-resource fields

Characteristic value.

See [valueType] for details.

ObjectCharacteristic sub-resource fields

A characteristic which value is a Object.

See [ObjectCharacteristic] for details.

valueType_2 sub-resource fields

Value of the characteristic.

See [valueType_2] for details.

StringArrayCharacteristic sub-resource fields

A characteristic which value is an array of String(s).

See [StringArrayCharacteristic] for details.

StringCharacteristic sub-resource fields

A characteristic which value is a String.

See [StringCharacteristic] for details.

TaskRelationship sub-resource fields

© TM Forum 2026. All Rights Reserved.

Describes relationship between tasks.

See [TaskRelationship] for details.

TaskSpecificationRef sub-resource fields

A reference to a TaskSpecification defined on design-time.

See [TaskSpecificationRef] for details.

Json representation sample(s)

We provide below a JSON representation as example of the 'Task' resource object.


```
{
  "id": "4fd-ty56-gg55-3",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-3",
  "isMandatory": true,
  "state": "active",
  "taskType": "businessRuleTask",
  "name": "Initialize ShoppingCart",
  "taskSpecification": {
    "id": "tfs1",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
    "name": "Initialize ShoppingCart",
    "@type": "TaskSpecificationRef",
    "@referredType": "TaskSpecification"
  },
  "parentProcess": {
    "id": "4fd-ty56-gg55",
    "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-gg55",
    "@type": "ProcessRef",
    "@referredType": "Process"
  },
  "relatedParty": [
    {
      "role": "Customer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "456-f69",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-f69",
        "name": "Jean Pontus",
        "@referredType": "Individual",
        "@type": "PartyRef"
      }
    }
  ],
  "taskCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristic",
      "characteristic": {
        "valueType": "string",
        "@type": "StringCharacteristic",
```


© TM Forum 2026. All Rights Reserved.

```
          "name": "Eligibility result",
          "value": "Qualified"
        }
      }
    ],
    "@type": "Task",
    "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/task.json"
  }
```


TaskSpecification resource

TaskSpecification is a class that allow to describe a task design. A task design defines the tasks that can potentially be instantiated within a process that is instantiated from this process specification.

Resource model

© TM Forum 2026. All Rights Reserved.

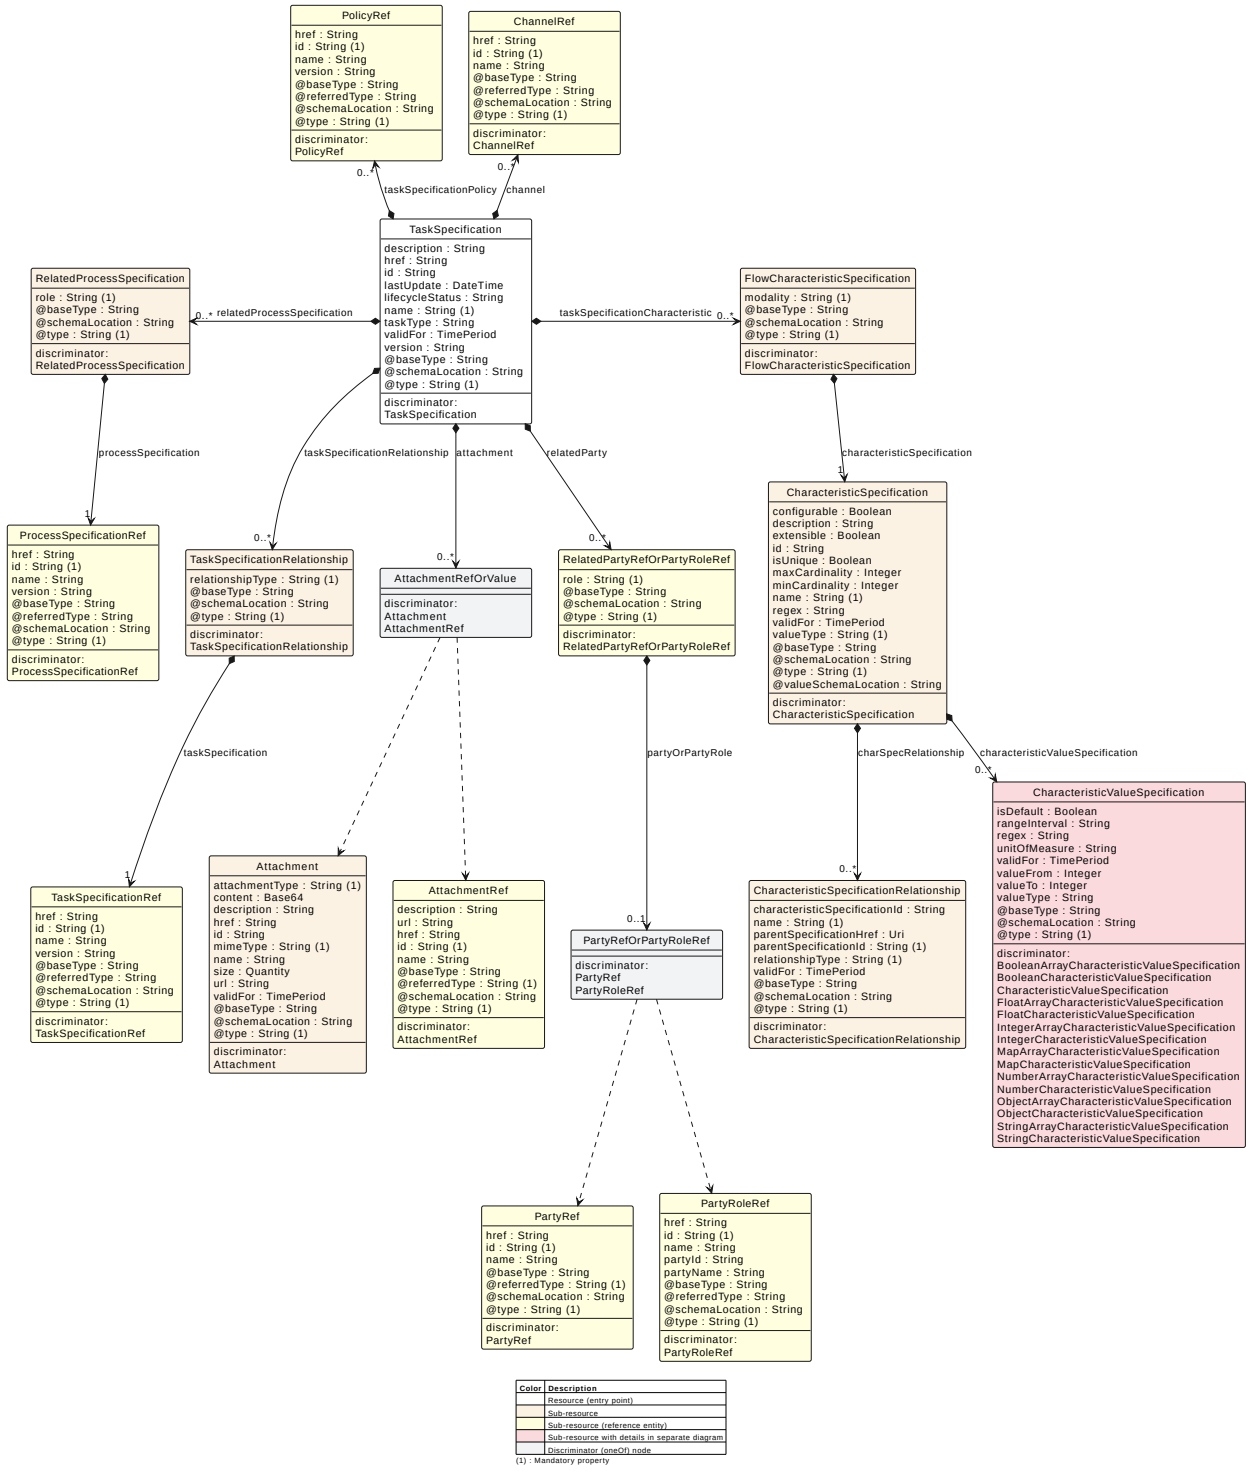


Figure 6 - TaskSpecification

See Figure 2 for CharacteristicValueSpecification diagrams.

Field descriptions

TaskSpecification fields

© TM Forum 2026. All Rights Reserved.

attachment	An AttachmentRefOrValue [0..*]. Attachments that are of relevance to this TaskSpecification, such as picture, document, media. This could be for example a how-to or a faq to explain this TaskSpecification.
channel	A ChannelRef [0..*]. A list of channels where Tasks instantiated from this TaskSpecification could be executed.
description	A String. Description of the TaskSpecification.
href	A String. Hyperlink reference.
id	A String. Unique identifier.
lastUpdate	A DateTime. Date and time of the last update of the Task Specification.
lifecycleStatus	A String. Used to indicate the current lifecycle status of this TaskSpecification, for example: onDesign, active, deprecated.
name	A String [1]. Name given to the TaskSpecification.
relatedParty	A RelatedPartyRefOrPartyRoleRef [0..*]. Parties who manage or otherwise have an interest in this Task Specification.
relatedProcessSpecification	A RelatedProcessSpecification [0..*]. A related Process Specification (for example when the TaskSpecification completion requires another ProcessSpecification to be triggered & completed).
taskSpecificationCharacteristic	A FlowCharacteristicSpecification [0..*]. List of characteristics that the TaskSpecification can take.
taskSpecificationPolicy	A PolicyRef [0..*]. A list of policies related to this task Specification.
taskSpecificationRelationship	A TaskSpecificationRelationship [0..*]. A list of tasks related to this task, representing dependencies, sequencing, or logical associations.
taskType	A String. The type of the task, the BPMN standard distinguish different types of tasks like sendTask, receive Task, userTask, manualTask, scriptTask, businessRuleTask.
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.

© TM Forum 2026. All Rights Reserved.

version	A String. TaskSpecification version.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

Attachment sub-resource fields

Complements the description of an element (for instance a product) through video, pictures...

See [Attachment] for details.

AttachmentRef sub-resource fields

Attachment reference. An attachment complements the description of an element (for instance a product) through video, pictures.

See [AttachmentRef] for details.

ChannelRef sub-resource fields

The channel to which the resource reference to. e.g. channel for selling product offerings, channel for opening a trouble ticket etc..

See [ChannelRef] for details.

RelatedPartyRefOrPartyRoleRef sub-resource fields

RelatedParty reference. A related party defines party or party role or its reference, linked to a specific entity.

See [RelatedPartyRefOrPartyRoleRef] for details.

PartyRef sub-resource fields

A Party reference.

See [PartyRef] for details.

PartyRoleRef sub-resource fields

Party role reference. A party role represents the part played by a party in a given context.

© TM Forum 2026. All Rights Reserved.

See [PartyRoleRef] for details.

RelatedProcessSpecification sub-resource fields

A reference to an external process specification which can be triggered, stopped or updated following this task design.

processSpecification	A ProcessSpecificationRef [1]. A reference to a process specification defined on design time.
role	A String [1].
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ProcessSpecificationRef sub-resource fields

A reference to a process specification defined on design time.

See [ProcessSpecificationRef] for details.

FlowCharacteristicSpecification sub-resource fields

This class defines a characteristic specification.

See [FlowCharacteristicSpecification] for details.

CharacteristicSpecification sub-resource fields

This class defines a characteristic specification.

See [CharacteristicSpecification] for details.

CharacteristicValueSpecification sub-resource fields

Specification of a value (number or text or an object) that can be assigned to a Characteristic. This is an abstract base class, the actual value is in one of the strongly-typed subclasses : BooleanArrayCharacteristicValueSpecification, BooleanCharacteristic ValueSpecification, FloatArrayCharacteristicValueSpecification, FloatCharacteristicValue Specification, IntegerArrayCharacteristicValueSpecification, IntegerCharacteristicValue Specification, MapArrayCharacteristicValueSpecification, MapCharacteristicValue Specification, NumberArrayCharacteristicValueSpecification, NumberCharacteristicValue

© TM Forum 2026. All Rights Reserved.

Specification, ObjectArrayCharacteristicValueSpecification, ObjectCharacteristicValueSpecification, StringArrayCharacteristicValueSpecification, String CharacteristicValueSpecification...

See [CharacteristicValueSpecification] for details.

BooleanArrayCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is an array booleans.

See [BooleanArrayCharacteristicValueSpecification] for details.

BooleanCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is a boolean.

See [BooleanCharacteristicValueSpecification] for details.

FloatArrayCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is a number array of format floating point.

See [FloatArrayCharacteristicValueSpecification] for details.

FloatCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is a floating point number.

See [FloatCharacteristicValueSpecification] for details.

IntegerArrayCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is a number array of format integer.

See [IntegerArrayCharacteristicValueSpecification] for details.

IntegerCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is an integer number.

See [IntegerCharacteristicValueSpecification] for details.

MapArrayCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is an array of mapped objects.

© TM Forum 2026. All Rights Reserved.

See [MapArrayCharacteristicValueSpecification] for details.

valueType sub-resource fields

See [valueType] for details.

valueType_2 sub-resource fields

See [valueType_2] for details.

MapCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is a mapped object.

See [MapCharacteristicValueSpecification] for details.

valueType_3 sub-resource fields

Value of the characteristic.

See [valueType_3] for details.

NumberArrayCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is a number array with no specific format.

See [NumberArrayCharacteristicValueSpecification] for details.

NumberCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is a number of no specific format.

See [NumberCharacteristicValueSpecification] for details.

ObjectArrayCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is an array of objects.

See [ObjectArrayCharacteristicValueSpecification] for details.

valueType_4 sub-resource fields

Characteristic value.

See [valueType_4] for details.

© TM Forum 2026. All Rights Reserved.

ObjectCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is any object.

See [ObjectCharacteristicValueSpecification] for details.

valueType_5 sub-resource fields

Value of the characteristic.

See [valueType_5] for details.

StringArrayCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is an array of strings.

See [StringArrayCharacteristicValueSpecification] for details.

StringCharacteristicValueSpecification sub-resource fields

A specification for a characteristic for which the value is a string.

See [StringCharacteristicValueSpecification] for details.

CharacteristicSpecificationRelationship sub-resource fields

An aggregation, migration, substitution, dependency or exclusivity relationship between/ among Characteristic specifications. The specification characteristic is embedded within the specification whose ID and href are in this entity, and identified by its ID.

See [CharacteristicSpecificationRelationship] for details.

PolicyRef sub-resource fields

Reference to managed Policy object.

See [PolicyRef] for details.

TaskSpecificationRelationship sub-resource fields

A relationship (triggers, delegates, etc...) between/among task specifications.

relationshipType	A String [1]. Type of relationship such as triggers, delegates, etc.
taskSpecification	A TaskSpecificationRef [1]. A reference to a TaskSpecification defined on design-time.

© TM Forum 2026. All Rights Reserved.

@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

TaskSpecificationRef sub-resource fields

A reference to a TaskSpecification defined on design-time.

See [TaskSpecificationRef] for details.

Json representation sample(s)

We provide below a JSON representation as example of the 'TaskSpecification' resource object.


```
{
  "id": "tfs0",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
  "description": "Check Offer Eligibility",
  "lastUpdate": "2024-04-30T13:03:57.839Z",
  "lifecycleStatus": "active",
  "name": "Eligibility Check",
  "taskType": "businessRuleTask",
  "version": "1",
  "attachment": [
    {
      "attachmentType": "TaskDocumentation",
      "description": "description of the business rules to apply in order to confirm or
not the eligibility",
      "mimeType": "application/pdf",
      "name": "tfs-2-doc",
      "url": "https://mycsp.com/content/dgpp5466-11ff-4dc8-pm55-4366ht7c43hl.pdf",
      "size": {
        "amount": 2105,
        "units": "Mb"
      },
      "validFor": {
        "startDateTime": "2024-04-12T23:20:50.52Z"
      },
      "@type": "Attachment"
    }
  ],
  "taskSpecificationCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristicSpecification",
      "characteristicSpecification": {
        "configurable": true,
        "description": "identification of product offering that the customer wishes to
have",
```


© TM Forum 2026. All Rights Reserved.

```
        "valueType": "object",
        "extensible": false,
        "isUnique": false,
        "maxCardinality": 1,
        "minCardinality": 0,
        "name": "productOfferingRef",
        "@type": "CharacteristicSpecification",
        "@valueSchemaLocation":
"https://www.mycsp.com/tmfapis/productCatalog/v5/schema/productOfferingRef.json"
      }
    },
    {
      "modality": "output",
      "@type": "FlowCharacteristicSpecification",
      "characteristicSpecification": {
        "configurable": true,
        "description": "the qualification result of the eligibility check",
        "extensible": false,
        "isUnique": false,
        "maxCardinality": 1,
        "minCardinality": 1,
        "name": "qualification result",
        "valueType": "string",
        "@type": "CharacteristicSpecification"
      }
    }
  ],
  "taskSpecificationRelationship": [
    {
      "relationshipType": "nextTask",
      "@type": "TaskSpecificationRelationship",
      "taskSpecification": {
        "id": "tfs1",
        "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
        "name": "Initialize ShoppingCart",
        "@type": "TaskSpecificationRef",
        "@referredType": "TaskSpecification"
      }
    }
  ],
  "relatedParty": [
    {
      "role": "designer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "4cf-mg1",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-mg1",
        "name": "Simon Clement",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    },
    {
      "role": "approver",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "fp5-559",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/fp5-559",
        "name": "Kate Noman",
```


© TM Forum 2026. All Rights Reserved.

```
          "@type": "PartyRef",
          "@referredType": "Individual"
        }
      }
    ],
    "validFor": {
      "startDateTime": "2024-12-30T13:03:57.839Z"
    },
    "@type": "TaskSpecification",
    "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/taskSpecification.json"
  }
```


Notification Resource Models

17 notifications are defined for this API.

Notifications related to ProcessSpecification:

- Create Event
- Delete Event
- Attribute Value Change Event
- State Change Event

Notifications related to Process:

- Create Event
- Delete Event
- Attribute Value Change Event
- State Change Event

Notifications related to Task:

- Create Event
- Delete Event
- Attribute Value Change Event
- Information Required Event
- State Change Event

Notifications related to TaskSpecification:

- Create Event
- Delete Event

© TM Forum 2026. All Rights Reserved.

- Attribute Value Change Event
- State Change Event

The notification structure for all notifications in this API follow the pattern depicted by the figure below. A notification event resource (depicted by "SpecificEvent" placeholder) is a sub class of a generic Event structure containing at least an id of the event occurrence (eventId), an event timestamp (eventTime), and the name of the resource (eventType). This notification structure owns an event payload structure ("SpecificEventPayload" placeholder) linked to the resource concerned by the notification using the resource name as access field ("resourceName" placeholder).

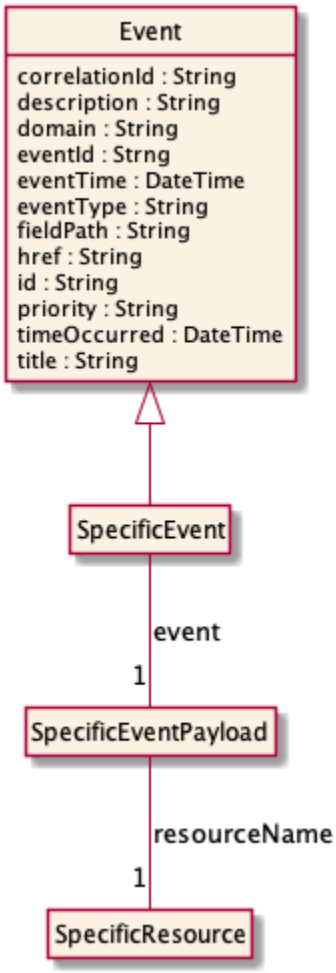


Figure 7 Notification Pattern

ProcessSpecification

Create Event

Message example for ProcessSpecificationCreateEvent event

© TM Forum 2026. All Rights Reserved.

```
Content-Type: application/json
{
  "id": "evt-127",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/event/evt-127",
  "correlationId": "90cfc73d-fog8",
  "description": "ProcessSpecificationCreateEvent illustration",
  "eventId": "00051",
  "eventTime": "2024-04-11T14:52:25-04:00",
  "eventType": "ProcessSpecificationCreateEvent",
  "timeOccurred": "2024-04-11T14:52:21.823Z",
  "title": "ProcessSpecificationCreateEvent",
  "event": {
    "processSpecification": {
      "id": "OC54",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC54",
      "lifecycleStatus": "onDesign",
      "version": "1",
      "lastUpdate": "2023-12-30T09:42:25.747Z",
      "name": "orderCapture",
      "description": "Description of the order capture process for all channels",
      "attachment": [
        {
          "attachmentType": "ProcessDocumentation",
          "description": "description of the business process with examples",
          "mimeType": "application/pdf",
          "name": "pfs-1-doc",
          "url": "http://host/Content/4aafacbd-11ff-4dc8-b445-305f2215715f",
          "size": {
            "amount": 2423,
            "units": "Mb"
          },
          "validFor": {
            "startDateTime": "2024-04-10T23:20:50.52Z"
          },
          "@type": "Attachment"
        }
      ],
      "processSpecificationCharacteristic": [
        {
          "modality": "input",
          "@type": "FlowCharacteristicSpecification",
          "characteristicSpecification": {
            "configurable": true,
            "description": "product offering that the customer wishes to have",
            "extensible": false,
            "isUnique": false,
            "maxCardinality": 1,
            "minCardinality": 0,
            "valueType": "object",
            "name": "productOfferingRef",
            "@type": "CharacteristicSpecification",
            "@valueSchemaLocation":
"https://www.mycsp.com/tmfapis/productCatalog/v5/schema/productOfferingRef.json"
          }
        }
      ],
      "relatedParty": [
        {
```


© TM Forum 2026. All Rights Reserved.

```
          "role": "designer",
          "@type": "RelatedPartyRefOrPartyRoleRef",
          "partyOrPartyRole": {
            "id": "4cf-mg1",
            "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-
mg1",
            "name": "Simon Clement",
            "@type": "PartyRef",
            "@referredType": "Individual"
          }
        },
        {
          "role": "approver",
          "@type": "RelatedPartyRefOrPartyRoleRef",
          "partyOrPartyRole": {
            "id": "fp5-559",
            "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/fp5-
559",
            "name": "Kate Noman",
            "@type": "PartyRef",
            "@referredType": "Individual"
          }
        }
      ],
      "taskSpecification": [
        {
          "id": "tfs99",
          "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs99",
          "@type": "TaskSpecificationRef",
          "@referredType": "TaskSpecification"
        },
        {
          "id": "tfs0",
          "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
          "@type": "TaskSpecificationRef",
          "@referredType": "TaskSpecification"
        },
        {
          "id": "tfs1",
          "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
          "@type": "TaskSpecificationRef",
          "@referredType": "TaskSpecification"
        },
        {
          "id": "tfs2",
          "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs2",
          "@type": "TaskSpecificationRef",
          "@referredType": "TaskSpecification"
        },
        {
          "id": "tfs3",
          "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs3",
          "@type": "TaskSpecificationRef",
          "@referredType": "TaskSpecification"
        }
```


© TM Forum 2026. All Rights Reserved.

```
      ],
      "@type": "ProcessSpecification"
    }
  },
  "reportingSystem": {
    "id": "759",
    "name": "APP-745",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "705",
    "name": "APP-317",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@type": "ProcessSpecificationCreateEvent",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/event.json"
}
```

Delete Event

Message example for ProcessSpecificationDeleteEvent event

```
Content-Type: application/json
{
  "id": "evt-126",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/event/evt-126",
  "correlationId": "90cfc73d-fog9",
  "description": "ProcessSpecificationDeleteEvent illustration",
  "eventId": "00052",
  "eventTime": "2024-04-11T14:52:25-04:00",
  "eventType": "ProcessSpecificationDeleteEvent",
  "timeOccurred": "2024-04-11T14:52:21.823Z",
  "title": "ProcessSpecificationDeleteEvent",
  "event": {
    "processSpecification": {
      "id": "OC54",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC54",
      "@type": "ProcessSpecification"
    }
  },
  "reportingSystem": {
    "id": "759",
    "name": "APP-745",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "705",
    "name": "APP-317",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
```

© TM Forum 2026. All Rights Reserved.

```
  "@baseType": "Event",
  "@type": "ProcessSpecificationDeleteEvent",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/event.json"
}
```

Attribute Value Change Event

Message example for ProcessSpecificationAttributeValueChangeEvent event

```
Content-Type: application/json
{
  "id": "evt-125",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/event/evt-125",
  "correlationId": "90kl90-Jo5",
  "description": "ProcessSpecificationAttributeValueChangeEvent illustration",
  "eventId": "00053",
  "eventTime": "2024-04-16T16:52:25-04:00",
  "eventType": "ProcessSpecificationAttributeValueChangeEvent",
  "timeOccurred": "2024-04-16T16:42:21.823Z",
  "title": "ProcessSpecificationAttributeValueChangeEvent",
  "event": {
    "processSpecification": {
      "id": "OC54",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC54",
      "name": "orderCapture",
      "@type": "ProcessSpecification",
      "relatedParty": [
        {
          "role": "designer",
          "@type": "RelatedPartyRefOrPartyRoleRef",
          "partyOrPartyRole": {
            "id": "4cf-mg1",
            "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-
mg1",
            "name": "Simon Clement",
            "@type": "PartyRef",
            "@referredType": "Individual"
          }
        },
        {
          "role": "approver",
          "@type": "RelatedPartyRefOrPartyRoleRef",
          "partyOrPartyRole": {
            "id": "698-4TG",
            "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/698-
4TG",
            "name": "kevin Thoup",
            "@type": "PartyRef",
            "@referredType": "Individual"
          }
        }
      ]
    }
  },
  "reportingSystem": {
```

© TM Forum 2026. All Rights Reserved.

```
    "id": "759",
    "name": "APP-745",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "705",
    "name": "APP-317",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@type": "ProcessSpecificationAttributeValueChangeEvent",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/event.json"
}
```


State Change Event

Message example for ProcessSpecificationStateChangeEvent event


```
Content-Type: application/json
{
  "id": "evt-128",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/event/evt-128",
  "eventId": "00052",
  "eventType": "ProcessSpecificationStateChangeEvent",
  "correlationId": "g56Iht-po54",
  "eventTime": "2024-04-18T16:42:26-04:00",
  "description": "ProcessSpecificationStateChangeEvent illustration",
  "timeOccurred": "2024-04-18T16:42:25-04:00",
  "title": "ProcessSpecificationStateChangeEvent",
  "event": {
    "processSpecification": {
      "id": "OC54",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC54",
      "@type": "ProcessSpecification",
      "lifecycleStatus": "active"
    }
  },
  "reportingSystem": {
    "id": "759",
    "name": "APP-745",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "705",
    "name": "APP-317",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@type": "ProcessSpecificationStateChangeEvent",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/event.json"
```


© TM Forum 2026. All Rights Reserved.

```
}
```

Process

Create Event

Message example for ProcessCreateEvent event

```
Content-Type: application/json
{
  "id": "evt-154",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/event/evt-154",
  "correlationId": "90cfc73d-deb7",
  "description": "ProcessCreateEvent illustration",
  "eventId": "00001",
  "eventTime": "2024-04-11T14:52:25-04:00",
  "eventType": "ProcessCreateEvent",
  "timeOccurred": "2024-04-11T14:52:21.823Z",
  "title": "ProcessCreateEvent",
  "event": {
    "process": {
      "id": "4fd-ty56-gg55",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-
gg55",
      "creationDate": "2024-04-11T14:52:21.823Z",
      "state": "active",
      "channel": {
        "id": "1",
        "href": "https://www.mycsp.com/tmfapis/channel/1",
        "name": "TMFWebStore",
        "@type": "ChannelRef",
        "@referredType": "Channel"
      },
      "processSpecification": {
        "id": "OC54",
        "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/ProcessSpecification/OC54",
        "name": "orderCapture",
        "@type": "ProcessSpecificationRef",
        "@referredType": "ProcessSpecification"
      },
      "relatedParty": [
        {
          "role": "Customer",
          "@type": "RelatedPartyRefOrPartyRoleRef",
          "partyOrPartyRole": {
            "id": "456-f69",
            "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-
f69",
            "name": "Jean Pontus",
            "@referredType": "Individual",
            "@type": "PartyRef"
          }
        }
      ],
      "processCharacteristic": [
```

© TM Forum 2026. All Rights Reserved.

```
        {
          "modality": "input",
          "@type": "FlowCharacteristic",
          "characteristic": {
            "name": "productOfferingRef",
            "valueType": "object",
            "@type": "ObjectCharacteristic",
            "value": {
              "name": "productOfferingRef",
              "id": "TMFMobile20",
              "href":
"https://www.mycsp.com/tmfapis/productCatalog/v5/productOffering/TMFMobile20",
              "@type": "ProductOfferingRef",
              "@referredType": "ProductOffering"
            }
          }
        }
      ],
      "task": [
        {
          "id": "4fd-ty56-gg55-2",
          "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-
gg55-2",
          "@type": "TaskRef",
          "@referredType": "Task"
        }
      ],
      "@type": "Process"
    }
  },
  "reportingSystem": {
    "id": "759",
    "name": "APP-745",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "705",
    "name": "APP-317",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@type": "ProcessCreateEvent",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/event.json"
}
```


Delete Event

Message example for ProcessDeleteEvent event


```
Content-Type: application/json
{
  "id": "evt-155",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/event/evt-155",
  "correlationId": "90cfc73d-gh5t",
```


© TM Forum 2026. All Rights Reserved.

```
  "eventId": "00004",
  "eventTime": "2024-04-18T16:42:27-04:00",
  "eventType": "ProcessDeleteEvent",
  "description": "ProcessDeleteEvent illustration",
  "timeOccurred": "2024-04-18T16:42:26-00:00",
  "title": "ProcessDeleteEvent",
  "event": {
    "process": {
      "id": "4fd-ty56-gg55",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-
gg55",
      "@type": "Process"
    }
  },
  "reportingSystem": {
    "id": "759",
    "name": "APP-745",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "705",
    "name": "APP-317",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@type": "ProcessDeleteEvent",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/event.json"
}
```


Attribute Value Change Event

Message example for ProcessAttributeValueChangeEvent event


```
Content-Type: application/json
{
  "id": "evt-026",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/event/evt-026",
  "correlationId": "90kl90-Hj6",
  "description": "ProcessAttributeValueChangeEvent illustration",
  "eventId": "00003",
  "eventTime": "2024-04-16T16:52:25-04:00",
  "eventType": "ProcessAttributeValueChangeEvent",
  "timeOccurred": "2024-04-16T16:42:21.823Z",
  "title": "ProcessAttributeValueChangeEvent",
  "event": {
    "process": {
      "id": "4fd-ty56-gg55",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-
gg55",
      "@type": "Process",
      "relatedParty": [
        {
          "role": "Customer",
          "@type": "RelatedPartyRefOrPartyRoleRef",
```


© TM Forum 2026. All Rights Reserved.

```
          "partyOrPartyRole": {
            "id": "9I8-430",
            "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/9I8-
430",
            "name": "Sara Eskiv",
            "@referredType": "Individual",
            "@type": "PartyRef"
          }
        }
      ]
    }
  },
  "reportingSystem": {
    "id": "759",
    "name": "APP-745",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "705",
    "name": "APP-317",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@type": "ProcessAttributeValueChangeEvent",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/event.json"
}
```


State Change Event

Message example for ProcessStateChangeEvent event


```
Content-Type: application/json
{
  "id": "evt-129",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/event/evt-129",
  "eventId": "00002",
  "eventType": "ProcessStateChangeEvent",
  "correlationId": "g56Iht-pi33",
  "eventTime": "2024-04-18T16:42:26-04:00",
  "description": "ProcessStateChangeEvent illustration",
  "timeOccurred": "2024-04-18T16:42:25-04:00",
  "title": "ProcessStateChangeEvent",
  "event": {
    "process": {
      "id": "4fd-ty56-gg55",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-
gg55",
      "@type": "Process",
      "state": "terminated"
    }
  },
  "reportingSystem": {
    "id": "759",
    "name": "APP-745",
```


© TM Forum 2026. All Rights Reserved.

```
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "705",
    "name": "APP-317",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@type": "ProcessStateChangeEvent",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/event.json"
}
```


Task

Create Event

Message example for TaskCreateEvent event


```
Content-Type: application/json
{
  "id": "evt-001",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/event/evt-001",
  "correlationId": "p698jf-ph45",
  "description": "TaskCreateEvent illustration",
  "timeOccurred": "2024-04-11T16:42:25-04:00",
  "eventId": "00011",
  "eventTime": "2024-04-11T16:42:43-04:00",
  "eventType": "TaskCreateEvent",
  "title": "TaskCreateEvent",
  "event": {
    "task": {
      "id": "4fd-ty56-gg55-2",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
2",
      "isMandatory": true,
      "state": "active",
      "taskSpecification": {
        "id": "tfs0",
        "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
        "name": "Check Offer Eligibility",
        "@type": "TaskSpecificationRef",
        "@referredType": "TaskSpecification"
      },
      "relatedParty": [
        {
          "role": "Customer",
          "@type": "RelatedPartyRefOrPartyRoleRef",
          "partyOrPartyRole": {
            "id": "456-f69",
            "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-
f69",
            "name": "Jean Pontus",
            "@referredType": "Individual",
```


© TM Forum 2026. All Rights Reserved.

```
            "@type": "PartyRef"
          }
        }
      ],
      "taskCharacteristic": [
        {
          "modality": "input",
          "@type": "FlowCharacteristic",
          "characteristic": {
            "name": "productOfferingRef",
            "valueType": "object",
            "@type": "ObjectCharacteristic",
            "value": {
              "name": "productOfferingRef",
              "id": "TMFMobile20",
              "href":
"https://www.mycsp.com/tmfapis/productCatalog/v5/productOffering/TMFMobile20",
              "@type": "ProductOfferingRef",
              "@referredType": "ProductOffering"
            }
          }
        }
      ],
      "@type": "Task"
    }
  },
  "reportingSystem": {
    "id": "759",
    "name": "APP-745",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "705",
    "name": "APP-317",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@type": "TaskCreateEvent",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/event.json"
}
```


Delete Event

Message example for TaskDeleteEvent event


```
Content-Type: application/json
{
  "id": "evt-003",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/event/evt-003",
  "correlationId": "p698jf-ph45",
  "description": "TaskDeleteEvent illustration",
  "timeOccurred": "2024-04-18T16:49:25-04:00",
  "eventId": "00012",
  "eventTime": "2024-04-18T16:42:25-04:00",
```


© TM Forum 2026. All Rights Reserved.

```
  "eventType": "TaskDeleteEvent",
  "title": "TaskDeleteEvent",
  "event": {
    "task": {
      "id": "4fd-ty56-gg55-2",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
2",
      "@type": "Task"
    }
  },
  "reportingSystem": {
    "id": "759",
    "name": "APP-745",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "705",
    "name": "APP-317",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@type": "TaskDeleteEvent",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/event.json"
}
```


Attribute Value Change Event

Message example for TaskAttributeValueChangeEvent event


```
Content-Type: application/json
{
  "id": "evt-002",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/event/evt-002",
  "correlationId": "g56Iht-tu69",
  "eventId": "00013",
  "eventTime": "2024-04-17T16:42:25-04:00",
  "eventType": "TaskAttributeValueChangeEvent",
  "title": "TaskAttributeValueChangeEvent",
  "description": "TaskAttributeValueChangeEvent illustration",
  "timeOccurred": "2024-04-18T16:42:25-04:00",
  "event": {
    "task": {
      "id": "4fd-ty56-gg55-2",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
2",
      "relatedParty": [
        {
          "role": "Customer",
          "@type": "RelatedPartyRefOrPartyRoleRef",
          "partyOrPartyRole": {
            "id": "9I8-430",
            "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/9I8-
430",
            "name": "Sara Eskiv",
```


© TM Forum 2026. All Rights Reserved.

```
            "@referredType": "Individual",
            "@type": "PartyRef"
          }
        }
      ],
      "@type": "Task"
    }
  },
  "reportingSystem": {
    "id": "759",
    "name": "APP-745",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "705",
    "name": "APP-317",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@type": "TaskAttributeValueChangeEvent",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/event.json"
}
```


Information Required Event

Message example for TaskInformationRequiredEvent event


```
Content-Type: application/json
{
  "id": "evt-004",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/event/evt-004",
  "eventId": "00064",
  "eventTime": "2024-04-18T16:49:25-04:00",
  "eventType": "TaskInformationRequiredEvent",
  "correlationId": "p698jf-pl45",
  "description": "TaskInformationRequiredEvent illustration",
  "timeOccurred": "2024-04-18T16:42:25-04:00",
  "title": "TaskInformationRequiredEvent",
  "@type": "TaskInformationRequiredEvent",
  "@baseType": "Event",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/event.json",
  "event": {
    "task": {
      "id": "4fd-ty56-gg55-2",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
2",
      "isMandatory": true,
      "state": "ready",
      "@type": "Task"
    },
    "informationRequired": {
      "op": "add",
      "path": "/relatedParty/partyOrPartyRole?role=customer"
    }
```


© TM Forum 2026. All Rights Reserved.

```
  },
  "reportingSystem": {
    "id": "884",
    "name": "COMP-41",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "507",
    "name": "APP-548",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  }
}
```

State Change Event

Message example for TaskStateChangeEvent event

```
Content-Type: application/json
{
  "id": "evt-027",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/event/evt-027",
  "correlationId": "b33a05fc-b3f5",
  "description": "TaskStateChangeEvent illustration",
  "eventId": "4c51-be07-e605a0a11b4d",
  "eventTime": "2024-08-25T12:28:11.007Z",
  "eventType": "TaskStateChangeEvent",
  "priority": "1",
  "timeOccurred": "2024-08-25T12:28:09.716Z",
  "title": "TaskStateChangeEvent",
  "event": {
    "task": {
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
3",
      "id": "4fd-ty56-gg55-3",
      "@type": "Task",
      "state": "completed"
    }
  },
  "reportingSystem": {
    "id": "884",
    "name": "APP-41",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "507",
    "name": "APP-548",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@type": "TaskStateChangeEvent",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/event.json"
```

© TM Forum 2026. All Rights Reserved.

```
}
```

TaskSpecification

Create Event

Message example for TaskSpecificationCreateEvent event

```
Content-Type: application/json
{
  "id": "evt-022",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/event/evt-022",
  "correlationId": "p698jf-ph61",
  "description": "TaskSpecificationCreateEvent illustration",
  "timeOccurred": "2024-04-11T16:42:25-04:00",
  "eventId": "00061",
  "eventTime": "2024-04-11T16:42:43-04:00",
  "eventType": "TaskSpecificationCreateEvent",
  "title": "TaskSpecificationCreateEvent",
  "event": {
    "taskSpecification": {
      "id": "tfs0",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
      "description": "Check Offer Eligibility",
      "lastUpdate": "2024-04-30T13:03:57.839Z",
      "lifecycleStatus": "active",
      "name": "Eligibility Check",
      "taskType": "businessRuleTask",
      "version": "1",
      "attachment": [
        {
          "attachmentType": "TaskDocumentation",
          "description": "description of the business rules to apply in order to
confirm or not the eligibility",
          "mimeType": "application/pdf",
          "name": "tfs-2-doc",
          "url": "http://host/Content/dgpp5466-11ff-4dc8-pm55-4366ht7c43hl",
          "size": {
            "amount": 2105,
            "units": "Mb"
          },
          "validFor": {
            "startDateTime": "2024-04-12T23:20:50.52Z"
          },
          "@type": "Attachment"
        }
      ],
      "taskSpecificationCharacteristic": [
        {
          "modality": "input",
          "@type": "FlowCharacteristicSpecification",
          "characteristicSpecification": {
            "configurable": true,
            "description": "identification of product offering that the customer wishes
to have",
```

© TM Forum 2026. All Rights Reserved.

```
            "extensible": false,
            "isUnique": false,
            "maxCardinality": 1,
            "minCardinality": 0,
            "name": "productOfferingRef",
            "valueType": "object",
            "@type": "CharacteristicSpecification",
            "@valueSchemaLocation":
"https://www.mycsp.com/tmfapis/productCatalog/v5/schema/productOfferingRef.json"
          }
        },
        {
          "modality": "output",
          "@type": "FlowCharacteristicSpecification",
          "characteristicSpecification": {
            "configurable": true,
            "description": "the qualification result of the eligibility check",
            "extensible": false,
            "isUnique": false,
            "maxCardinality": 1,
            "minCardinality": 1,
            "name": "qualification result",
            "valueType": "string",
            "@type": "CharacteristicSpecification"
          }
        }
      ],
      "taskSpecificationRelationship": [
        {
          "relationshipType": "nextTask",
          "@type": "TaskSpecificationRelationship",
          "taskSpecification": {
            "id": "tfs1",
            "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
            "name": "Initialize ShoppingCart",
            "@type": "TaskSpecificationRef",
            "@referredType": "TaskSpecification"
          }
        }
      ],
      "relatedParty": [
        {
          "role": "designer",
          "@type": "RelatedPartyRefOrPartyRoleRef",
          "partyOrPartyRole": {
            "id": "4cf-mg1",
            "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-
mg1",
            "name": "Simon Clement",
            "@type": "PartyRef",
            "@referredType": "Individual"
          }
        },
        {
          "role": "approver",
          "@type": "RelatedPartyRefOrPartyRoleRef",
          "partyOrPartyRole": {
            "id": "fp5-559",
            "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/fp5-
```


© TM Forum 2026. All Rights Reserved.

```
559",
            "name": "Kate Noman",
            "@type": "PartyRef",
            "@referredType": "Individual"
          }
        }
      ],
      "validFor": {
        "startDateTime": "2024-12-30T13:03:57.839Z"
      },
      "@type": "TaskSpecification"
    }
  },
  "reportingSystem": {
    "id": "759",
    "name": "APP-745",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "705",
    "name": "APP-317",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@type": "TaskSpecificationCreateEvent",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/event.json"
}
```


Delete Event

Message example for TaskSpecificationDeleteEvent event


```
Content-Type: application/json
{
  "id": "evt-024",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/event/evt-024",
  "correlationId": "p698jf-ph62",
  "description": "TaskSpecificationDeleteEvent illustration",
  "timeOccurred": "2024-04-11T16:42:25-04:00",
  "eventId": "00062",
  "eventTime": "2024-04-11T16:42:43-04:00",
  "eventType": "TaskSpecificationDeleteEvent",
  "title": "TaskSpecificationDeleteEvent",
  "event": {
    "taskSpecification": {
      "id": "tfs0",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
      "@type": "TaskSpecification"
    }
  },
  "reportingSystem": {
    "id": "759",
    "name": "APP-745",
```


© TM Forum 2026. All Rights Reserved.

```
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "705",
    "name": "APP-317",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@type": "TaskSpecificationDeleteEvent",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/event.json"
}
```

Attribute Value Change Event

Message example for TaskSpecificationAttributeValueChangeEvent event

```
Content-Type: application/json
{
  "id": "evt-021",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/event/evt-021",
  "correlationId": "g56Iht-oi09",
  "eventId": "00063",
  "eventTime": "2024-04-18T16:42:25-04:00",
  "eventType": "TaskSpecificationAttributeValueChangeEvent",
  "description": "TaskSpecificationAttributeValueChangeEvent illustration",
  "timeOccurred": "2024-04-18T16:42:25-04:00",
  "title": "TaskSpecificationAttributeValueChangeEvent",
  "event": {
    "taskSpecification": {
      "id": "tfs0",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
      "name": "Eligibility Check",
      "relatedParty": [
        {
          "role": "approver",
          "@type": "RelatedPartyRefOrPartyRoleRef",
          "partyOrPartyRole": {
            "id": "9I8-430",
            "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/9I8-
430",
            "name": "Sara Eskiv",
            "@referredType": "Individual",
            "@type": "PartyRef"
          }
        }
      ],
      "@type": "TaskSpecification"
    }
  },
  "reportingSystem": {
    "id": "759",
    "name": "APP-745",
    "@type": "ReportingResource",
```

© TM Forum 2026. All Rights Reserved.

```
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "705",
    "name": "APP-317",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@type": "TaskSpecificationAttributeValueChangeEvent",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/event.json"
}
```


State Change Event

Message example for TaskSpecificationStateChangeEvent event


```
Content-Type: application/json
{
  "id": "evt-023",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/event/evt-023",
  "correlationId": "b33a05fc-b3gt5",
  "description": "TaskSpecificationStateChangeEvent illustration",
  "eventId": "be074c51",
  "eventTime": "2024-08-25T12:28:11.007Z",
  "eventType": "TaskSpecificationStateChangeEvent",
  "priority": "1",
  "timeOccurred": "2024-08-25T12:28:09.716Z",
  "title": "TaskSpecificationStateChangeEvent",
  "event": {
    "taskSpecification": {
      "id": "tfs0",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
      "@type": "TaskSpecification",
      "lifecycleStatus": "active"
    }
  },
  "reportingSystem": {
    "id": "884",
    "name": "APP-41",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "507",
    "name": "APP-548",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@type": "TaskSpecificationStateChangeEvent",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/event.json"
}
```


© TM Forum 2026. All Rights Reserved.

API OPERATIONS

Remember the following Uniform Contract:

Operation on Entities	Uniform API Operation	Description
Query Entities	GET Resource	GET must be used to retrieve a representation of a resource.
Create Entity	POST Resource	POST must be used to create a new resource
Partial Update of an Entity	PATCH Resource	PATCH must be used to partially update a resource
Remove an Entity	DELETE Resource	DELETE must be used to remove a resource
Execute an Action on an Entity	POST on TASK Resource	POST must be used to execute Task Resources
Other Request Methods	POST on TASK Resource	GET and POST must not be used to tunnel other request methods.

Filtering and attribute selection rules are described in the TMF REST Design Guidelines.

Notifications are also described in a subsequent section.

Operations on ProcessSpecification

Retrieves a processSpecification by ID

`GET /processSpecification/{id}?fields=…`

Description

This operation retrieves a ProcessSpecification entity. Attribute selection is enabled for all first level attributes.

Usage samples

Retrieve a processSpecification from its unique identifier.

Request

© TM Forum 2026. All Rights Reserved.

```
GET /processSpecification/OC54
Content-Type: application/json
```

Response

```
200

{
  "id": "OC54",
  "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC54",
  "lifecycleStatus": "onDesign",
  "version": "1",
  "lastUpdate": "2023-12-30T09:42:25.747Z",
  "name": "orderCapture",
  "description": "Description of the order capture process for all channels",
  "attachment": [
    {
      "attachmentType": "TaskDocumentation",
      "description": "description of the business process with examples",
      "mimeType": "application/pdf",
      "name": "pfs-1-doc",
      "url": "https://mycsp.com/content/4aafacbd-11ff-4dc8-b445-305f2215715f",
      "size": {
        "amount": 2423,
        "units": "Mb"
      },
      "validFor": {
        "startDateTime": "2030-04-10T23:20:50.52Z"
      },
      "@type": "Attachment"
    }
  ],
  "processSpecificationCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristicSpecification",
      "characteristicSpecification": {
        "configurable": true,
        "description": "product offering that the customer wishes to have",
        "extensible": false,
        "isUnique": false,
        "maxCardinality": 1,
        "minCardinality": 0,
        "valueType": "object",
        "name": "productOfferingRef",
        "@type": "CharacteristicSpecification",
        "@valueSchemaLocation":
"https://www.mycsp.com/tmfapis/productCatalog/v5/schema/productOfferingRef.json"
      }
    }
  ],
  "relatedParty": [
    {
      "role": "designer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
```

© TM Forum 2026. All Rights Reserved.

```
      "partyOrPartyRole": {
        "id": "4cf-mg1",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-mg1",
        "name": "Simon Clement",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    },
    {
      "role": "approver",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "fp5-559",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/fp5-559",
        "name": "Kate Noman",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    }
  ],
  "taskSpecification": [
    {
      "id": "tfs99",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs99",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs0",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs1",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs2",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs2",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs3",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs3",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    }
  ],
  "@type": "ProcessSpecification"
}
```


© TM Forum 2026. All Rights Reserved.

List or find processSpecification objects

GET /processSpecification?fields=…&{filtering}

Description

This operation list ProcessSpecification entities. Attribute selection is enabled for all first level attributes. Filtering may be available depending on the compliance level supported by an implementation.

Usage samples

Retrieve a list of processSpecification(s) - Complete processSpecification representation are sent back.

Request

```
GET /processSpecification
Content-Type: application/json
```

Response

```
200

[
  {
    "id": "OC54",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC54",
    "lifecycleStatus": "onDesign",
    "version": "1",
    "lastUpdate": "2023-12-30T09:42:25.747Z",
    "name": "orderCapture",
    "description": "Description of the order capture process for all channels",
    "attachment": [
      {
        "attachmentType": "ProcessDocumentation",
        "description": "description of the business process with examples",
        "mimeType": "application/pdf",
        "name": "pfs-1-doc",
        "url": "https://mycsp.com/content/4aafacbd-11ff-4dc8-b445-305f2215715f",
        "size": {
          "amount": 2423,
          "units": "Mb"
        },
        "validFor": {
          "startDateTime": "2030-04-10T23:20:50.52Z"
        },
        "@type": "Attachment"
      }
    ],
    "processSpecificationCharacteristic": [
```

© TM Forum 2026. All Rights Reserved.

```
      {
        "modality": "input",
        "@type": "FlowCharacteristicSpecification",
        "characteristicSpecification": {
          "configurable": true,
          "description": "identification of product offering that the customer wishes
to have",
          "extensible": false,
          "isUnique": false,
          "maxCardinality": 1,
          "minCardinality": 0,
          "name": "productOfferingRef",
          "valueType": "object",
          "@type": "CharacteristicSpecification",
          "@valueSchemaLocation":
"https://www.mycsp.com/tmfapis/productCatalog/v5/schema/productOfferingRef.json"
        }
      }
    ],
    "relatedParty": [
      {
        "role": "designer",
        "@type": "RelatedPartyRefOrPartyRoleRef",
        "partyOrPartyRole": {
          "id": "4cf-mg1",
          "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-
mg1",
          "name": "Simon Clement",
          "@type": "PartyRef",
          "@referredType": "Individual"
        }
      },
      {
        "role": "approver",
        "@type": "RelatedPartyRefOrPartyRoleRef",
        "partyOrPartyRole": {
          "id": "fp5-559",
          "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/fp5-
559",
          "name": "Kate Noman",
          "@type": "PartyRef",
          "@referredType": "Individual"
        }
      }
    ],
    "taskSpecification": [
      {
        "id": "tfs99",
        "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs99",
        "@type": "TaskSpecificationRef",
        "@referredType": "TaskSpecification"
      },
      {
        "id": "tfs0",
        "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
        "@type": "TaskSpecificationRef",
        "@referredType": "TaskSpecification"
      },
```


© TM Forum 2026. All Rights Reserved.

```
      {
        "id": "tfs1",
        "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
        "@type": "TaskSpecificationRef",
        "@referredType": "TaskSpecification"
      },
      {
        "id": "tfs2",
        "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs2",
        "@type": "TaskSpecificationRef",
        "@referredType": "TaskSpecification"
      },
      {
        "id": "tfs3",
        "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs3",
        "@type": "TaskSpecificationRef",
        "@referredType": "TaskSpecification"
      }
    ],
    "@type": "ProcessSpecification"
  }
]
```


Retrieve a list of processSpecification(s) with filter selection - only few attributes are retrieved for each processSpecification.

Request

```
GET /processSpecification?fields=id,href,@type,description,lastUpdate,name,version
Content-Type: application/json
```

Response


```
200

[
  {
    "id": "OC54",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC54",
    "description": "Description of the order capture process for all channels",
    "lastUpdate": "2024-12-30T09:42:25.747Z",
    "name": "orderCapture",
    "version": "1",
    "@type": "ProcessSpecification"
  },
  {
    "id": "OC55",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC55",
    "description": "Description of the order completion process for all channels",
```


© TM Forum 2026. All Rights Reserved.

```
    "lastUpdate": "2024-12-30T09:42:25.747Z",
    "name": "orderCompletion",
    "version": "1.4",
    "@type": "ProcessSpecification"
  },
  {
    "id": "OC56",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC56",
    "description": "Description of the welcome process for all channels",
    "lastUpdate": "2024-12-30T09:42:25.747Z",
    "name": "welcome",
    "version": "7.2",
    "@type": "ProcessSpecification"
  }
]
```


Creates a processSpecification

POST /processSpecification?fields=…&{filtering}

Description

This operation creates a ProcessSpecification entity.

Mandatory Attributes

Mandatory Attributes	Rule
name	
relatedParty.role	
@type	

Usage samples

Creation of a new processSpecification with POST operation

Request

```
POST /processSpecification
Content-Type: application/json

{
  "name": "orderCapture",
  "description": "Description of the order capture process for all channels",
  "attachment": [
    {
      "attachmentType": "ProcessDocumentation",
      "description": "description of the business process with examples",
      "mimeType": "application/pdf",
      "name": "pfs-1-doc",
```

© TM Forum 2026. All Rights Reserved.

```
      "url": "https://mycsp.com/content/4aafacbd-11ff-4dc8-b445-305f2215715f",
      "size": {
        "amount": 2423,
        "units": "Mb"
      },
      "validFor": {
        "startDateTime": "2030-04-10T23:20:50.52Z"
      },
      "@type": "Attachment"
    }
  ],
  "processSpecificationCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristicSpecification",
      "characteristicSpecification": {
        "configurable": true,
        "description": "product offering that the customer wishes to have",
        "extensible": false,
        "isUnique": false,
        "maxCardinality": 1,
        "minCardinality": 0,
        "valueType": "object",
        "name": "productOfferingRef",
        "@type": "CharacteristicSpecification",
        "@valueSchemaLocation":
"https://www.mycsp.com/tmfapis/productCatalog/v5/schema/productOfferingRef.json"
      }
    }
  ],
  "relatedParty": [
    {
      "role": "designer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "4cf-mg1",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-mg1",
        "name": "Simon Clement",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    },
    {
      "role": "approver",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "fp5-559",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/fp5-559",
        "name": "Kate Noman",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    }
  ],
  "taskSpecification": [
    {
      "id": "tfs99",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs99",
      "version": "1",
```


© TM Forum 2026. All Rights Reserved.

```
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs0",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
      "version": "1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs1",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
      "version": "1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs2",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs2",
      "version": "1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs3",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs3",
      "version": "1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    }
  ],
  "@type": "ProcessSpecification"
}
```


Response


```
201

{
  "id": "OC54",
  "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC54",
  "lifecycleStatus": "onDesign",
  "version": "1",
  "lastUpdate": "2023-12-30T09:42:25.747Z",
  "name": "orderCapture",
  "description": "Description of the order capture process for all channels",
  "attachment": [
    {
      "attachmentType": "ProcessDocumentation",
      "description": "description of the business process with examples",
      "mimeType": "application/pdf",
```


© TM Forum 2026. All Rights Reserved.

```
      "name": "pfs-1-doc",
      "url": "https://mycsp.com/content/4aafacbd-11ff-4dc8-b445-305f2215715f",
      "size": {
        "amount": 2423,
        "units": "Mb"
      },
      "validFor": {
        "startDateTime": "2030-04-10T23:20:50.52Z"
      },
      "@type": "Attachment"
    }
  ],
  "processSpecificationCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristicSpecification",
      "characteristicSpecification": {
        "configurable": true,
        "description": "product offering that the customer wishes to have",
        "extensible": false,
        "isUnique": false,
        "maxCardinality": 1,
        "minCardinality": 0,
        "valueType": "object",
        "name": "productOfferingRef",
        "@type": "CharacteristicSpecification",
        "@valueSchemaLocation":
"https://www.mycsp.com/tmfapis/productCatalog/v5/schema/productOfferingRef.json"
      }
    }
  ],
  "relatedParty": [
    {
      "role": "designer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "4cf-mg1",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-mg1",
        "name": "Simon Clement",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    },
    {
      "role": "approver",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "fp5-559",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/fp5-559",
        "name": "Kate Noman",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    }
  ],
  "taskSpecification": [
    {
      "id": "tfs99",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs99",
```


© TM Forum 2026. All Rights Reserved.

```
      "version": "1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs0",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
      "version": "1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs1",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
      "version": "1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs2",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs2",
      "version": "1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs3",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs3",
      "version": "1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    }
  ],
  "@type": "ProcessSpecification",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/processSpecification.json"
}
```


Updates partially a processSpecification

`PATCH /processSpecification/{id}?fields=…`

Description

This operation allows partial updates of a ProcessSpecification entity. Support of json/merge (https://tools.ietf.org/html/rfc7396) is mandatory, support of json/patch (http://tools.ietf.org/html/rfc5789) is optional. Note: If the update operation yields to the creation of sub-resources or relationships, the same rules concerning mandatory sub-resource attributes and default value settings in the POST operation applies to the PATCH operation. Hence these tables are not repeated here.

© TM Forum 2026. All Rights Reserved.

Patchable and Non Patchable Attributes

Non Patchable Attributes	Rule
href	
id	
@baseType	@baseType is immutable
@schemaLocation	@schemaLocation is immutable
@type	@type is immutable

Patchable Attributes	Rule
attachment	
channel	
description	
lastUpdate	
lifecycleStatus	
name	
processSpecificationCharacteristic	
processSpecificationPolicy	
processSpecificationRelationship	
relatedParty	
taskSpecification	
validFor	
version	

Usage samples

Update a ProcessSpecification using json-patch-query+json

Request

```
PATCH /processSpecification/OC54
Content-Type: application/json-patch-query+json

[
```

© TM Forum 2026. All Rights Reserved.

```
  {
    "op": "replace",
    "path": "/relatedParty/partyOrPartyRole?role=approver",
    "value": {
      "id": "698-4TG",
      "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/698-4TG",
      "name": "kevin Thoup",
      "@type": "PartyRef",
      "@referredType": "Individual"
    }
  }
]
```

Response

```
200

{
  "id": "OC54",
  "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC54",
  "lifecycleStatus": "onDesign",
  "version": "1",
  "lastUpdate": "2023-12-30T09:42:25.747Z",
  "name": "orderCapture",
  "description": "Description of the order capture process for all channels",
  "attachment": [
    {
      "attachmentType": "ProcessDocumentation",
      "description": "description of the business process with examples",
      "mimeType": "application/pdf",
      "name": "pfs-1-doc",
      "url": "https://mycsp.com/content/4aafacbd-11ff-4dc8-b445-305f2215715f",
      "size": {
        "amount": 2423,
        "units": "Mb"
      },
      "validFor": {
        "startDateTime": "2030-04-10T23:20:50.52Z"
      },
      "@type": "Attachment"
    }
  ],
  "processSpecificationCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristicSpecification",
      "characteristicSpecification": {
        "configurable": true,
        "description": "product offering that the customer wishes to have",
        "extensible": false,
        "isUnique": false,
        "maxCardinality": 1,
        "minCardinality": 0,
        "valueType": "object",
        "name": "productOfferingRef",
        "@type": "CharacteristicSpecification",
```

© TM Forum 2026. All Rights Reserved.

```
        "@valueSchemaLocation":
"https://www.mycsp.com/tmfapis/productCatalog/v5/schema/productOfferingRef.json"
      }
    }
  ],
  "relatedParty": [
    {
      "role": "designer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "4cf-mg1",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-mg1",
        "name": "Simon Clement",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    },
    {
      "role": "approver",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "698-4TG",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/698-4TG",
        "name": "kevin Thoup",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    }
  ],
  "taskSpecification": [
    {
      "id": "tfs99",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs99",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs0",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs1",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs2",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs3",
```


© TM Forum 2026. All Rights Reserved.

```
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    }
  ],
  "@type": "ProcessSpecification"
}
```

Update a ProcessSpecification using json-patch+json

Request

```
PATCH /processSpecification/OC54
Content-Type: application/json-patch+json

[
  {
    "op": "replace",
    "path": "/relatedParty",
    "value": [
      {
        "role": "designer",
        "@type": "RelatedPartyRefOrPartyRoleRef",
        "partyOrPartyRole": {
          "id": "4cf-mg1",
          "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-
mg1",
          "name": "Simon Clement",
          "@type": "PartyRef",
          "@referredType": "Individual"
        }
      },
      {
        "role": "approver",
        "@type": "RelatedPartyRefOrPartyRoleRef",
        "partyOrPartyRole": {
          "id": "698-4TG",
          "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/698-
4TG",
          "name": "kevin Thoup",
          "@type": "PartyRef",
          "@referredType": "Individual"
        }
      }
    ]
  }
]
```

Response

```
200

{
```

© TM Forum 2026. All Rights Reserved.

```
  "id": "OC54",
  "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC54",
  "lifecycleStatus": "onDesign",
  "version": "1",
  "lastUpdate": "2023-12-30T09:42:25.747Z",
  "name": "orderCapture",
  "description": "Description of the order capture process for all channels",
  "attachment": [
    {
      "attachmentType": "ProcessDocumentation",
      "description": "description of the business process with examples",
      "mimeType": "application/pdf",
      "name": "pfs-1-doc",
      "url": "https://mycsp.com/content/4aafacbd-11ff-4dc8-b445-305f2215715f",
      "size": {
        "amount": 2423,
        "units": "Mb"
      },
      "validFor": {
        "startDateTime": "2030-04-10T23:20:50.52Z"
      },
      "@type": "Attachment"
    }
  ],
  "processSpecificationCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristicSpecification",
      "characteristicSpecification": {
        "configurable": true,
        "description": "product offering that the customer wishes to have",
        "extensible": false,
        "isUnique": false,
        "maxCardinality": 1,
        "minCardinality": 0,
        "valueType": "object",
        "name": "productOfferingRef",
        "@type": "CharacteristicSpecification",
        "@valueSchemaLocation":
"https://www.mycsp.com/tmfapis/productCatalog/v5/schema/productOfferingRef.json"
      }
    }
  ],
  "relatedParty": [
    {
      "role": "designer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "4cf-mg1",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-mg1",
        "name": "Simon Clement",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    },
    {
      "role": "approver",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
```


© TM Forum 2026. All Rights Reserved.

```
        "id": "698-4TG",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/698-4TG",
        "name": "kevin Thoup",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    }
  ],
  "taskSpecification": [
    {
      "id": "tfs99",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs99",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs0",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs1",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs2",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs3",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    }
  ],
  "@type": "ProcessSpecification"
}
```


PATCH ProcessSpecification request leveraging merge-patch+json application example

Request

```
PATCH /processSpecification/OC54
Content-Type: application/merge-patch+json

{
  "relatedParty": [
```

© TM Forum 2026. All Rights Reserved.

```
    {
      "role": "designer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "4cf-mg1",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-mg1",
        "name": "Simon Clement",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    },
    {
      "role": "approver",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "698-4TG",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/698-4TG",
        "name": "kevin Thoup",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    }
  ],
  "name": "orderCapture",
  "@type": "ProcessSpecification"
}
```


Response


```
200

{
  "id": "OC54",
  "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC54",
  "lifecycleStatus": "onDesign",
  "version": "1",
  "lastUpdate": "2023-12-30T09:42:25.747Z",
  "name": "orderCapture",
  "description": "Description of the order capture process for all channels",
  "attachment": [
    {
      "attachmentType": "ProcessDocumentation",
      "description": "description of the business process with examples",
      "mimeType": "application/pdf",
      "name": "pfs-1-doc",
      "url": "https://mycsp.com/content/4aafacbd-11ff-4dc8-b445-305f2215715f",
      "size": {
        "amount": 2423,
        "units": "Mb"
      },
      "validFor": {
        "startDateTime": "2030-04-10T23:20:50.52Z"
      },
      "@type": "Attachment"
    }
  ],
```


© TM Forum 2026. All Rights Reserved.

```
   "processSpecificationCharacteristic": [
     {
       "modality": "input",
       "@type": "FlowCharacteristicSpecification",
       "characteristicSpecification": {
         "configurable": true,
         "description": "product offering that the customer wishes to have",
         "extensible": false,
         "isUnique": false,
         "maxCardinality": 1,
         "minCardinality": 0,
         "valueType": "object",
         "name": "productOfferingRef",
         "@type": "CharacteristicSpecification",
         "@valueSchemaLocation":
"https://www.mycsp.com/tmfapis/productCatalog/v5/schema/productOfferingRef.json"
       }
     }
   ],
   "relatedParty": [
     {
       "role": "designer",
       "@type": "RelatedPartyRefOrPartyRoleRef",
       "partyOrPartyRole": {
         "id": "4cf-mg1",
         "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-mg1",
         "name": "Simon Clement",
         "@type": "PartyRef",
         "@referredType": "Individual"
       }
     },
     {
       "role": "approver",
       "@type": "RelatedPartyRefOrPartyRoleRef",
       "partyOrPartyRole": {
         "id": "698-4TG",
         "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/698-4TG",
         "name": "kevin Thoup",
         "@type": "PartyRef",
         "@referredType": "Individual"
       }
     }
   ],
   "taskSpecification": [
     {
       "id": "tfs99",
       "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs99",
       "@type": "TaskSpecificationRef",
       "@referredType": "TaskSpecification"
     },
     {
       "id": "tfs0",
       "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
       "@type": "TaskSpecificationRef",
       "@referredType": "TaskSpecification"
     },
     {
       "id": "tfs1",
```


© TM Forum 2026. All Rights Reserved.

```
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs2",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs3",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    }
  ],
  "@type": "ProcessSpecification"
}
```

PATCH ProcessSpecification request leveraging json application example

Request

```
PATCH /processSpecification/OC54
Content-Type: application/json

{
  "relatedParty": [
    {
      "role": "designer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "4cf-mg1",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-mg1",
        "name": "Simon Clement",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    },
    {
      "role": "approver",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "698-4TG",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/698-4TG",
        "name": "kevin Thoup",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    }
  ],
  "name": "orderCapture",
  "@type": "ProcessSpecification"
```

© TM Forum 2026. All Rights Reserved.

```
}
```

Response

```
200

{
  "id": "OC54",
  "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC54",
  "lifecycleStatus": "onDesign",
  "version": "1",
  "lastUpdate": "2023-12-30T09:42:25.747Z",
  "name": "orderCapture",
  "description": "Description of the order capture process for all channels",
  "attachment": [
    {
      "attachmentType": "ProcessDocumentation",
      "description": "description of the business process with examples",
      "mimeType": "application/pdf",
      "name": "pfs-1-doc",
      "url": "https://mycsp.com/content/4aafacbd-11ff-4dc8-b445-305f2215715f",
      "size": {
        "amount": 2423,
        "units": "Mb"
      },
      "validFor": {
        "startDateTime": "2030-04-10T23:20:50.52Z"
      },
      "@type": "Attachment"
    }
  ],
  "processSpecificationCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristicSpecification",
      "characteristicSpecification": {
        "configurable": true,
        "description": "product offering that the customer wishes to have",
        "extensible": false,
        "isUnique": false,
        "maxCardinality": 1,
        "minCardinality": 0,
        "valueType": "object",
        "name": "productOfferingRef",
        "@type": "CharacteristicSpecification",
        "@valueSchemaLocation":
"https://www.mycsp.com/tmfapis/productCatalog/v5/schema/productOfferingRef.json"
      }
    }
  ],
  "relatedParty": [
    {
      "role": "designer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "4cf-mg1",
```

© TM Forum 2026. All Rights Reserved.

```
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-mg1",
        "name": "Simon Clement",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    },
    {
      "role": "approver",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "698-4TG",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/698-4TG",
        "name": "kevin Thoup",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    }
  ],
  "taskSpecification": [
    {
      "id": "tfs99",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs99",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs0",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs1",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs2",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    {
      "id": "tfs3",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    }
  ],
  "@type": "ProcessSpecification"
}
```


© TM Forum 2026. All Rights Reserved.

Deletes a processSpecification

DELETE /processSpecification/{id}?{filtering}

Description

This operation deletes a ProcessSpecification entity.

Usage samples

Here's an example of a request for delete a specific process

Request

```
DELETE /processSpecification/OC54
Content-Type: application/json
```

Response

```
204
```

Operations on Process

Retrieves a process by ID

GET /process/{id}?fields=…

Description

This operation retrieves a Process entity. Attribute selection is enabled for all first level attributes.

Usage samples

Retrieve a process from its identifier - only a subset of process attributes (as defined in the API) are used in this example

Request

```
GET /process/4fd-ty56-gg55
Content-Type: application/json
```

Response

© TM Forum 2026. All Rights Reserved.

```
200

{
  "id": "4fd-ty56-gg55",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-gg55",
  "creationDate": "2024-04-11T14:52:21.823Z",
  "state": "completed",
  "channel": {
    "id": "1",
    "href": "https://www.mycsp.com/tmfapis/channel/1",
    "name": "TMFWebStore",
    "@type": "ChannelRef",
    "@referredType": "Channel"
  },
  "processSpecification": {
    "id": "OC54",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC54",
    "name": "orderCapture",
    "version": "1",
    "@type": "ProcessSpecificationRef",
    "@referredType": "ProcessSpecification"
  },
  "relatedParty": [
    {
      "role": "Customer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "456-f69",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-f69",
        "name": "Jean Pontus",
        "@referredType": "Individual",
        "@type": "PartyRef"
      }
    }
  ],
  "processCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristic",
      "characteristic": {
        "valueType": "object",
        "name": "Offer name",
        "@type": "ObjectCharacteristic",
        "value": {
          "name": "productOfferingRef",
          "id": "TMFMobile20",
          "href":
"https://www.mycsp.com/tmfapis/productCatalog/v5/productOffering/TMFMobile20",
          "@type": "ProductOfferingRef",
          "@referredType": "ProductOffering"
        }
      }
    }
  ],
  "task": [
    {
      "id": "4fd-ty56-gg55-2",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
```


© TM Forum 2026. All Rights Reserved.

```
2",
      "@type": "TaskRef",
      "@referredType": "Task"
    },
    {
      "id": "4fd-ty56-gg55-3",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
3",
      "@type": "TaskRef",
      "@referredType": "Task"
    },
    {
      "id": "4fd-ty56-gg55-4",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
4",
      "@type": "TaskRef",
      "@referredType": "Task"
    },
    {
      "id": "4fd-ty56-gg55-5",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
5",
      "@type": "TaskRef",
      "@referredType": "Task"
    }
  ],
  "relatedEntity": [
    {
      "role": "created shopping Cart",
      "@type": "RelatedEntity",
      "entity": {
        "id": "1203",
        "href":
"https://www.mycsp.com/tmfapis/shoppingCartManagement/v5/shoppingCart/1203",
        "@referredType": "ShoppingCart",
        "@type": "EntityRef"
      }
    }
  ],
  "@type": "Process"
}
```


List or find process objects

`GET /process?fields=…&{filtering}`

Description

This operation list Process entities. Attribute selection is enabled for all first level attributes. Filtering may be available depending on the compliance level supported by an implementation.

Usage samples

Retrieve a list of process(s) - Complete process representation are sent back.

© TM Forum 2026. All Rights Reserved.

Request

```
GET /process
Content-Type: application/json
```

Response

```
200

[
  {
    "id": "4fd-ty56-gg55",
    "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-gg55",
    "creationDate": "2024-04-11T14:52:21.823Z",
    "state": "completed",
    "channel": {
      "id": "1",
      "href": "https://www.mycsp.com/tmfapis/channel/1",
      "name": "TMFWebStore",
      "@type": "ChannelRef",
      "@referredType": "Channel"
    },
    "processSpecification": {
      "id": "OC54",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC54",
      "name": "orderCapture",
      "@type": "ProcessSpecificationRef",
      "@referredType": "ProcessSpecification"
    },
    "relatedParty": [
      {
        "role": "Customer",
        "@type": "RelatedPartyRefOrPartyRoleRef",
        "partyOrPartyRole": {
          "id": "456-f69",
          "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-
f69",
          "name": "Jean Pontus",
          "@referredType": "Individual",
          "@type": "PartyRef"
        }
      }
    ],
    "processCharacteristic": [
      {
        "modality": "input",
        "@type": "FlowCharacteristic",
        "characteristic": {
          "valueType": "object",
          "name": "Offer name",
          "@type": "ObjectCharacteristic",
          "value": {
            "name": "productOfferingRef",
            "id": "TMFMobile20",
            "href":
```

© TM Forum 2026. All Rights Reserved.

```
"https://www.mycsp.com/tmfapis/productCatalog/v5/productOffering/TMFMobile20",
            "@type": "ProductOfferingRef",
            "@referredType": "ProductOffering"
          }
        }
      }
    ],
    "task": [
      {
        "id": "4fd-ty56-gg55-2",
        "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
2",
        "@type": "TaskRef",
        "@referredType": "Task"
      },
      {
        "id": "4fd-ty56-gg55-3",
        "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
3",
        "@type": "TaskRef",
        "@referredType": "Task"
      },
      {
        "id": "4fd-ty56-gg55-4",
        "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
4",
        "@type": "TaskRef",
        "@referredType": "Task"
      },
      {
        "id": "4fd-ty56-gg55-5",
        "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
5",
        "@type": "TaskRef",
        "@referredType": "Task"
      }
    ],
    "relatedEntity": [
      {
        "role": "created shopping Cart",
        "@type": "RelatedEntity",
        "entity": {
          "id": "1203",
          "href":
"https://www.mycsp.com/tmfapis/shoppingCartManagement/v5/shoppingCart/1203",
          "@referredType": "ShoppingCart",
          "@type": "EntityRef"
        }
      }
    ],
    "@type": "Process",
    "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/process.json"
  }
]
```


Here's an example of a request for retrieving a list of process(s). Requested fields are id,href, @type, state

© TM Forum 2026. All Rights Reserved.

Request

```
GET /process?fields=state,id,href,@type
Content-Type: application/json
```

Response

```
200

[
  {
    "id": "4fd-ty56-gg55",
    "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-gg55",
    "state": "active",
    "@type": "Process"
  }
]
```

Creates a process

POST /process?fields=…&{filtering}

Description

This operation creates a Process entity.

Mandatory Attributes

Mandatory Attributes	Rule
externalIdentifier.id	
processRelationship.relationshipType	
processSpecification	
relatedEntity.role	
relatedParty.role	
@type	

Usage samples

Creation of a new process with POST operation

Request

© TM Forum 2026. All Rights Reserved.

```
POST /process
Content-Type: application/json

{
  "channel": {
    "id": "1",
    "href": "https://www.mycsp.com/tmfapis/channel/1",
    "name": "TMFWebStore",
    "@type": "ChannelRef",
    "@referredType": "Channel"
  },
  "processSpecification": {
    "id": "OC54",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC54",
    "name": "orderCapture",
    "version": "1",
    "@type": "ProcessSpecificationRef",
    "@referredType": "ProcessSpecification"
  },
  "relatedParty": [
    {
      "role": "Customer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "456-f69",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-f69",
        "name": "Jean Pontus",
        "@referredType": "Individual",
        "@type": "PartyRef"
      }
    }
  ],
  "processCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristic",
      "characteristic": {
        "name": "Offer name",
        "valueType": "object",
        "@type": "ObjectCharacteristic",
        "value": {
          "name": "TMFMobile20",
          "id": "TMFMobile20",
          "href":
"https://www.mycsp.com/tmfapis/productCatalog/v5/productOffering/TMFMobile20",
          "@type": "ProductOfferingRef",
          "@referredType": "ProductOffering"
        }
      }
    }
  ],
  "@type": "Process",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/process.json"
}
```

Response

© TM Forum 2026. All Rights Reserved.

```
201

{
  "id": "4fd-ty56-gg55",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-gg55",
  "creationDate": "2024-04-11T14:52:21.823Z",
  "state": "active",
  "channel": {
    "id": "1",
    "href": "https://www.mycsp.com/tmfapis/channel/1",
    "name": "TMFWebStore",
    "@type": "ChannelRef",
    "@referredType": "Channel"
  },
  "processSpecification": {
    "id": "OC54",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC54",
    "name": "orderCapture",
    "version": "1",
    "@type": "ProcessSpecificationRef",
    "@referredType": "ProcessSpecification"
  },
  "relatedParty": [
    {
      "role": "Customer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "456-f69",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-f69",
        "name": "Jean Pontus",
        "@referredType": "Individual",
        "@type": "PartyRef"
      }
    }
  ],
  "processCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristic",
      "characteristic": {
        "valueType": "object",
        "name": "Offer name",
        "@type": "ObjectCharacteristic",
        "value": {
          "name": "TMFMobile20",
          "id": "TMFMobile20",
          "href":
"https://www.mycsp.com/tmfapis/productCatalog/v5/productOffering/TMFMobile20",
          "@type": "ProductOfferingRef",
          "@referredType": "ProductOffering"
        }
      }
    }
  ],
  "task": [
    {
      "id": "4fd-ty56-gg55-2",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
```

© TM Forum 2026. All Rights Reserved.

```
2",
      "@type": "TaskRef",
      "@referredType": "Task"
    }
  ],
  "@type": "Process",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/process.json"
}
```


Updates partially a process

`PATCH /process/{id}?fields=…`

Description

This operation allows partial updates of a Process entity. Support of json/merge (https://tools.ietf.org/html/rfc7396) is mandatory, support of json/patch (http://tools.ietf.org/html/rfc5789) is optional. Note: If the update operation yields to the creation of sub-resources or relationships, the same rules concerning mandatory sub-resource attributes and default value settings in the POST operation applies to the PATCH operation. Hence these tables are not repeated here.

Patchable and Non Patchable Attributes

Non Patchable Attributes	Rule
creationDate	
href	
id	
processSpecification	
@baseType	@baseType is immutable
@schemaLocation	@schemaLocation is immutable
@type	@type is immutable

Patchable Attributes	Rule
channel	
completionDate	
description	
externalIdentifier	
name	

© TM Forum 2026. All Rights Reserved.

Patchable Attributes	Rule
processCharacteristic	
processRelationship	
relatedEntity	
relatedParty	
requestedCompletionDate	
requestedStartDate	
startDate	
state	
task	

Usage samples

Update a Process using json-patch-query+json

Request

```
PATCH /process/4fd-ty56-gg55
Content-Type: application/json-patch-query+json

[
  {
    "op": "replace",
    "path": "/relatedParty/partyOrPartyRole?role=Customer",
    "value": {
      "id": "9I8-430",
      "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/9I8-430",
      "name": "Sara Eskiv",
      "@referredType": "Individual",
      "@type": "PartyRef"
    }
  }
]
```

Response

```
200

{
  "id": "4fd-ty56-gg55",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-gg55",
  "@type": "Process",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/process.json",
  "creationDate": "2024-04-11T14:52:21.823Z",
  "state": "active",
```

© TM Forum 2026. All Rights Reserved.

```
   "processSpecification": {
     "id": "OC54",
     "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC54",
     "name": "orderCapture",
     "version": "1",
     "@type": "ProcessSpecificationRef",
     "@referredType": "ProcessSpecification"
   },
   "channel": {
     "id": "1",
     "href": "https://www.mycsp.com/tmfapis/channel/1",
     "name": "TMFWebStore",
     "@type": "ChannelRef",
     "@referredType": "Channel"
   },
   "relatedParty": [
     {
       "role": "Customer",
       "@type": "RelatedPartyRefOrPartyRoleRef",
       "partyOrPartyRole": {
         "id": "9I8-430",
         "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/9I8-430",
         "name": "Sara Eskiv",
         "@referredType": "Individual",
         "@type": "PartyRef"
       }
     }
   ],
   "processCharacteristic": [
     {
       "modality": "input",
       "@type": "FlowCharacteristic",
       "characteristic": {
         "valueType": "object",
         "name": "Offer name",
         "@type": "ObjectCharacteristic",
         "value": {
           "name": "productOfferingRef",
           "id": "TMFMobile20",
           "href":
"https://www.mycsp.com/tmfapis/productCatalog/v5/productOffering/TMFMobile20",
           "@type": "ProductOfferingRef",
           "@referredType": "ProductOffering"
         }
       }
     }
   ],
   "task": [
     {
       "id": "4fd-ty56-gg55-2",
       "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
2",
       "@type": "TaskRef",
       "@referredType": "Task"
     },
     {
       "id": "4fd-ty56-gg55-3",
       "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
3",
```


© TM Forum 2026. All Rights Reserved.

```
      "@type": "TaskRef",
      "@referredType": "Task"
    },
    {
      "id": "4fd-ty56-gg55-4",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
4",
      "@type": "TaskRef",
      "@referredType": "Task"
    },
    {
      "id": "4fd-ty56-gg55-5",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
5",
      "@type": "TaskRef",
      "@referredType": "Task"
    }
  ],
  "relatedEntity": [
    {
      "role": "created shopping Cart",
      "@type": "RelatedEntity",
      "entity": {
        "id": "T65-POAFR556",
        "href":
"https://www.mycsp.com/tmfapis/shoppingCartManagement/v5/shoppingCart/T65-POAFR556",
        "@referredType": "ShoppingCart",
        "@type": "EntityRef"
      }
    }
  ]
}
```


Update a Process using json-patch+json

Request

```
PATCH /process/4fd-ty56-gg55
Content-Type: application/json-patch+json

[
  {
    "op": "replace",
    "path": "/state",
    "value": "terminated"
  }
]
```

Response

```
200

{
  "id": "4fd-ty56-gg55",
```

© TM Forum 2026. All Rights Reserved.

```
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-gg55",
  "@type": "Process",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/process.json",
  "creationDate": "2024-04-11T14:52:21.823Z",
  "state": "terminated",
  "processSpecification": {
    "id": "OC54",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC54",
    "name": "orderCapture",
    "version": "1",
    "@type": "ProcessSpecificationRef",
    "@referredType": "ProcessSpecification"
  },
  "channel": {
    "id": "1",
    "href": "https://www.mycsp.com/tmfapis/channel/1",
    "name": "TMFWebStore",
    "@type": "ChannelRef",
    "@referredType": "Channel"
  },
  "relatedParty": [
    {
      "role": "Customer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "456-f69",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-f69",
        "name": "Jean Pontus",
        "@referredType": "Individual",
        "@type": "PartyRef"
      }
    }
  ],
  "processCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristic",
      "characteristic": {
        "valueType": "object",
        "name": "Offer name",
        "@type": "ObjectCharacteristic",
        "value": {
          "name": "productOfferingRef",
          "id": "TMFMobile20",
          "href":
"https://www.mycsp.com/tmfapis/productCatalog/v5/productOffering/TMFMobile20",
          "@type": "ProductOfferingRef",
          "@referredType": "ProductOffering"
        }
      }
    }
  ],
  "task": [
    {
      "id": "4fd-ty56-gg55-2",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
2",
      "@type": "TaskRef",
      "@referredType": "Task"
```


© TM Forum 2026. All Rights Reserved.

```
    },
    {
      "id": "4fd-ty56-gg55-3",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
3",
      "@type": "TaskRef",
      "@referredType": "Task"
    },
    {
      "id": "4fd-ty56-gg55-4",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
4",
      "@type": "TaskRef",
      "@referredType": "Task"
    },
    {
      "id": "4fd-ty56-gg55-5",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
5",
      "@type": "TaskRef",
      "@referredType": "Task"
    }
  ],
  "relatedEntity": [
    {
      "role": "created shopping Cart",
      "@type": "RelatedEntity",
      "entity": {
        "id": "T65-POAFR556",
        "href":
"https://www.mycsp.com/tmfapis/shoppingCartManagement/v5/shoppingCart/T65-POAFR556",
        "@referredType": "ShoppingCart",
        "@type": "EntityRef"
      }
    }
  ]
}
```


PATCH Process request leveraging merge-patch+json application example

Request


```
PATCH /process/4fd-ty56-gg55
Content-Type: application/merge-patch+json

{
  "relatedParty": [
    {
      "role": "Customer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "9I8-430",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/9I8-430",
        "name": "Sara Eskiv",
        "@referredType": "Individual",
        "@type": "PartyRef"
      }
```


© TM Forum 2026. All Rights Reserved.

```
    }
  ],
  "@type": "Process"
}
```

Response

```
200

{
  "id": "4fd-ty56-gg55",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-gg55",
  "@type": "Process",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/process.json",
  "creationDate": "2024-04-11T14:52:21.823Z",
  "state": "active",
  "processSpecification": {
    "id": "OC54",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC54",
    "name": "orderCapture",
    "version": "1",
    "@type": "ProcessSpecificationRef",
    "@referredType": "ProcessSpecification"
  },
  "channel": {
    "id": "1",
    "href": "https://www.mycsp.com/tmfapis/channel/1",
    "name": "TMFWebStore",
    "@type": "ChannelRef",
    "@referredType": "Channel"
  },
  "relatedParty": [
    {
      "role": "Customer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "9I8-430",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/9I8-430",
        "name": "Sara Eskiv",
        "@referredType": "Individual",
        "@type": "PartyRef"
      }
    }
  ],
  "processCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristic",
      "characteristic": {
        "valueType": "object",
        "name": "Offer name",
        "@type": "ObjectCharacteristic",
        "value": {
          "name": "productOfferingRef",
          "id": "TMFMobile20",
          "href":
```

© TM Forum 2026. All Rights Reserved.

```
"https://www.mycsp.com/tmfapis/productCatalog/v5/productOffering/TMFMobile20",
          "@type": "ProductOfferingRef",
          "@referredType": "ProductOffering"
        }
      }
    }
  ],
  "task": [
    {
      "id": "4fd-ty56-gg55-2",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
2",
      "@type": "TaskRef",
      "@referredType": "Task"
    },
    {
      "id": "4fd-ty56-gg55-3",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
3",
      "@type": "TaskRef",
      "@referredType": "Task"
    },
    {
      "id": "4fd-ty56-gg55-4",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
4",
      "@type": "TaskRef",
      "@referredType": "Task"
    },
    {
      "id": "4fd-ty56-gg55-5",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
5",
      "@type": "TaskRef",
      "@referredType": "Task"
    }
  ],
  "relatedEntity": [
    {
      "role": "created shopping Cart",
      "@type": "RelatedEntity",
      "entity": {
        "id": "T65-POAFR556",
        "href":
"https://www.mycsp.com/tmfapis/shoppingCartManagement/v5/shoppingCart/T65-POAFR556",
        "@referredType": "ShoppingCart",
        "@type": "EntityRef"
      }
    }
  ]
}
```

PATCH Process request leveraging json application example

Request

```
PATCH /process/4fd-ty56-gg55
```

© TM Forum 2026. All Rights Reserved.

```
Content-Type: application/json

{
  "relatedParty": [
    {
      "role": "Customer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "9I8-430",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/9I8-430",
        "name": "Sara Eskiv",
        "@referredType": "Individual",
        "@type": "PartyRef"
      }
    }
  ],
  "@type": "Process"
}
```

Response

```
200

{
  "id": "4fd-ty56-gg55",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-gg55",
  "@type": "Process",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/process.json",
  "creationDate": "2024-04-11T14:52:21.823Z",
  "state": "active",
  "processSpecification": {
    "id": "OC54",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/processSpecification/OC54",
    "name": "orderCapture",
    "version": "1",
    "@type": "ProcessSpecificationRef",
    "@referredType": "ProcessSpecification"
  },
  "channel": {
    "id": "1",
    "href": "https://www.mycsp.com/tmfapis/channel/1",
    "name": "TMFWebStore",
    "@type": "ChannelRef",
    "@referredType": "Channel"
  },
  "relatedParty": [
    {
      "role": "Customer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "9I8-430",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/9I8-430",
        "name": "Sara Eskiv",
        "@referredType": "Individual",
        "@type": "PartyRef"
      }
```

© TM Forum 2026. All Rights Reserved.

```
    }
  ],
  "processCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristic",
      "characteristic": {
        "valueType": "object",
        "name": "Offer name",
        "@type": "ObjectCharacteristic",
        "value": {
          "name": "productOfferingRef",
          "id": "TMFMobile20",
          "href":
"https://www.mycsp.com/tmfapis/productCatalog/v5/productOffering/TMFMobile20",
          "@type": "ProductOfferingRef",
          "@referredType": "ProductOffering"
        }
      }
    }
  ],
  "task": [
    {
      "id": "4fd-ty56-gg55-2",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
2",
      "@type": "TaskRef",
      "@referredType": "Task"
    },
    {
      "id": "4fd-ty56-gg55-3",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
3",
      "@type": "TaskRef",
      "@referredType": "Task"
    },
    {
      "id": "4fd-ty56-gg55-4",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
4",
      "@type": "TaskRef",
      "@referredType": "Task"
    },
    {
      "id": "4fd-ty56-gg55-5",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
5",
      "@type": "TaskRef",
      "@referredType": "Task"
    }
  ],
  "relatedEntity": [
    {
      "role": "created shopping Cart",
      "@type": "RelatedEntity",
      "entity": {
        "id": "T65-POAFR556",
        "href":
"https://www.mycsp.com/tmfapis/shoppingCartManagement/v5/shoppingCart/T65-POAFR556",
        "@referredType": "ShoppingCart",
```


© TM Forum 2026. All Rights Reserved.

```
        "@type": "EntityRef"
      }
    }
  ]
}
```

Deletes a process

`DELETE /process/{id}?{filtering}`

Description

This operation deletes a Process entity.

Usage samples

Here's an example of a request for delete a specific process

Request

```
DELETE /process/4fd-ty56-gg55
Content-Type: application/json
```

Response

```
204
```

Operations on Task

Retrieves a task by ID

`GET /task/{id}?fields=…`

Description

This operation retrieves a Task entity. Attribute selection is enabled for all first level attributes.

Usage samples

Retrieve a task from its identifier - only a subset of task attributes (as defined in the API) are used in this example

Request

© TM Forum 2026. All Rights Reserved.

```
GET /task/4fd-ty56-gg55
Content-Type: application/json
```

Response

```
200

{
  "id": "4fd-ty56-gg55-3",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-3",
  "isMandatory": true,
  "state": "active",
  "taskType": "businessRuleTask",
  "name": "Initialize ShoppingCart",
  "taskSpecification": {
    "id": "tfs1",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
    "name": "Initialize ShoppingCart",
    "version": "1",
    "@type": "TaskSpecificationRef",
    "@referredType": "TaskSpecification"
  },
  "parentProcess": {
      "id": "4fd-ty56-gg55",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-
gg55",
      "@type": "ProcessRef",
      "@referredType": "Process"
  },
  "relatedParty": [
    {
      "role": "Customer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "456-f69",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-f69",
        "name": "Jean Pontus",
        "@referredType": "Individual",
        "@type": "PartyRef"
      }
    }
  ],
  "taskCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristic",
      "characteristic": {
        "valueType": "string",
        "name": "Eligibility result",
        "@type": "StringCharacteristic",
        "value": "Qualified"
      }
    }
  ],
  "@type": "Task",
```

© TM Forum 2026. All Rights Reserved.

```
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/task.json"
}
```

List or find task objects

`GET /task?fields=…&{filtering}`

Description

This operation list Task entities. Attribute selection is enabled for all first level attributes. Filtering may be available depending on the compliance level supported by an implementation.

Usage samples

Retrieve a list of task(s) - Complete task representation are sent back.

Request

```
GET /task/4fd-ty56-gg55
Content-Type: application/json
```

Response

```
200

[
  {
    "id": "4fd-ty56-gg55-2",
    "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-2",
    "name": "Check Offer Eligibility",
    "taskSpecification": {
      "id": "tfs0",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
      "name": "Check Offer Eligibility",
      "version": "1",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    "parentProcess": {
      "id": "4fd-ty56-gg55",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-
gg55",
      "@type": "ProcessRef",
      "@referredType": "Process"
    },
    "isMandatory": true,
    "state": "completed",
    "taskType": "businessRuleTask",
    "relatedParty": [
```

© TM Forum 2026. All Rights Reserved.

```
      {
        "role": "Customer",
        "@type": "RelatedPartyRefOrPartyRoleRef",
        "partyOrPartyRole": {
          "id": "456-f69",
          "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-
f69",
          "name": "Jean Pontus",
          "@referredType": "Individual",
          "@type": "PartyRef"
        }
      }
    ],
    "taskCharacteristic": [
      {
        "modality": "input",
        "@type": "FlowCharacteristic",
        "characteristic": {
          "name": "productOfferingRef",
          "valueType": "object",
          "@type": "ObjectCharacteristic",
          "value": {
            "name": "TMFMobile20",
            "id": "TMFMobile20",
            "href":
"https://www.mycsp.com/tmfapis/productCatalog/v5/productOffering/TMFMobile20",
            "@type": "ProductOfferingRef",
            "@referredType": "ProductOffering"
          }
        }
      },
      {
        "modality": "output",
        "@type": "FlowCharacteristic",
        "characteristic": {
          "name": "Eligibility result",
          "valueType": "string",
          "@type": "StringCharacteristic",
          "value": "Qualified"
        }
      }
    ],
    "@type": "Task",
    "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/task.json",
    "taskRelationship": [
      {
        "relationshipType": "nextTask",
        "id": "4fd
-ty56-gg55-3",
        "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
3",
        "@type": "TaskRelationship",
        "@referredType": "Task"
      }
    ]
  },
  {
    "id": "4fd-ty56-gg55-3",
    "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-3",
    "isMandatory": true,
```


© TM Forum 2026. All Rights Reserved.

```
    "state": "active",
    "taskType": "businessRuleTask",
    "name": "Initialize ShoppingCart",
    "taskSpecification": {
      "id": "tfs1",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
      "name": "Initialize ShoppingCart",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    "parentProcess": {
      "id": "4fd-ty56-gg55",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-
gg55",
      "@type": "ProcessRef",
      "@referredType": "Process"
    },
    "relatedParty": [
      {
        "role": "Customer",
        "@type": "RelatedPartyRefOrPartyRoleRef",
        "partyOrPartyRole": {
          "id": "456-f69",
          "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-
f69",
          "name": "Jean Pontus",
          "@referredType": "Individual",
          "@type": "PartyRef"
        }
      }
    ],
    "taskCharacteristic": [
      {
        "modality": "input",
        "@type": "FlowCharacteristic",
        "characteristic": {
          "valueType": "string",
          "@type": "StringCharacteristic",
          "name": "Eligibility result",
          "value": "Qualified"
        }
      }
    ],
    "relatedEntity": [
      {
        "role": "created shopping Cart",
        "@type": "RelatedEntity",
        "entity": {
          "id": "1203",
          "href":
"https://www.mycsp.com/tmfapis/shoppingCartManagement/v5/shoppingCart/1203",
          "@referredType": "ShoppingCart",
          "@type": "EntityRef"
        }
      }
    ],
    "@type": "Task",
    "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/task.json"
  },
```


© TM Forum 2026. All Rights Reserved.

```
  {
    "id": "4fd-ty56-gg55-4",
    "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-4",
    "@type": "Task",
    "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/task.json",
    "isMandatory": true,
    "taskSpecification": {
      "id": "tfs2",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs2",
      "name": "Configure ShoppingCart",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    "parentProcess": {
      "id": "4fd-ty56-gg55",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-
gg55",
      "@type": "ProcessRef",
      "@referredType": "Process"
    },
    "relatedEntity": [
      {
        "role": "shoppingCart",
        "@type": "RelatedEntity",
        "entity": {
          "id": "1203",
          "href":
"https://www.mycsp.com/tmfapis/shoppingCartManagement/v5/shoppingCart/1203",
          "name": "web ShoppingCart for Jean Pontus",
          "@referredType": "ShoppingCart",
          "@type": "EntityRef"
        }
      }
    ],
    "taskRelationship": [
      {
        "relationshipType": "previousTask",
        "id": "4fd-ty56-gg55-3",
        "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
3",
        "@type": "TaskRelationship",
        "@referredType": "TaskRef"
      },
      {
        "relationshipType": "nextTask",
        "id": "4fd-ty56-gg55-5",
        "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
5",
        "@type": "TaskRelationship",
        "@referredType": "TaskRef"
      }
    ],
    "state": "completed"
  },
  {
    "id": "4fd-ty56-gg55-5",
    "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-5",
    "@type": "Task",
    "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/task.json",
```


© TM Forum 2026. All Rights Reserved.

```
    "isMandatory": true,
    "taskSpecification": {
      "id": "tfs3",
      "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs2",
      "name": "Check out Cart",
      "@type": "TaskSpecificationRef",
      "@referredType": "TaskSpecification"
    },
    "parentProcess": {
      "id": "4fd-ty56-gg55",
      "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-
gg55",
      "@type": "ProcessRef",
      "@referredType": "Process"
    },
    "relatedEntity": [
      {
        "role": "shoppingCart",
        "@type": "RelatedEntity",
        "entity": {
          "id": "1203",
          "href":
"https://www.mycsp.com/tmfapis/shoppingCartManagement/v5/shoppingCart/1203",
          "name": "web ShoppingCart for Jean Pontus",
          "@referredType": "ShoppingCart",
          "@type": "EntityRef"
        }
      }
    ],
    "taskRelationship": [
      {
        "relationshipType": "previousTask",
        "id": "4fd-ty56-gg55-4",
        "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-
3",
        "@type": "TaskRelationship",
        "@referredType": "TaskRef"
      }
    ],
    "state": "completed"
  }
]
```


Retrieve a list of task(s) - only few attributes are retrieved for each task.

Request

```
GET /task/4fd-ty56-gg55?fields=id,@type,href,state&filter=state=completed
Content-Type: application/json
```

Response

```
200
```

© TM Forum 2026. All Rights Reserved.

```
[
  {
    "id": "4fd-ty56-gg55-2",
    "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-2",
    "state": "completed",
    "@type": "Task"
  },
  {
    "id": "4fd-ty56-gg55-3",
    "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-3",
    "state": "completed",
    "@type": "Task"
  },
  {
    "id": "4fd-ty56-gg55-4",
    "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-4",
    "state": "completed",
    "@type": "Task"
  },
  {
    "id": "4fd-ty56-gg55-5",
    "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-5",
    "state": "completed",
    "@type": "Task"
  }
]
```


Creates a task

`POST /task?fields=…&{filtering}`

Description

This operation creates a Task entity.

Mandatory Attributes

Mandatory Attributes	Rule
relatedEntity.role	
relatedParty.role	
taskRelationship.id	
taskRelationship.relationshipType	
@type	

Usage samples

Creation of a new task with POST operation

© TM Forum 2026. All Rights Reserved.

Request

```
POST /task/4fd-ty56-gg55
Content-Type: application/json

{
  "taskSpecification": {
    "id": "tfs1",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
    "name": "Initialize ShoppingCart",
    "version": "1",
    "@type": "TaskSpecificationRef",
    "@referredType": "TaskSpecification"
  },
  "isMandatory": true,
  "relatedParty": [
    {
      "role": "Customer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "456-f69",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-f69",
        "name": "Jean Pontus",
        "@referredType": "Individual",
        "@type": "PartyRef"
      }
    }
  ],
  "taskCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristic",
      "characteristic": {
        "valueType": "string",
        "@type": "StringCharacteristic",
        "name": "Eligibility result",
        "value": "Qualified"
      }
    }
  ],
  "@type": "Task",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/task.json"
}
```

Response

```
201

{
  "id": "4fd-ty56-gg55-3",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-3",
  "isMandatory": true,
  "state": "active",
  "taskType": "businessRuleTask",
  "name": "Initialize ShoppingCart",
```

© TM Forum 2026. All Rights Reserved.

```
   "taskSpecification": {
     "id": "tfs1",
     "href":
 "https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
     "name": "Initialize ShoppingCart",
     "version": "1",
     "@type": "TaskSpecificationRef",
     "@referredType": "TaskSpecification"
   },
   "parentProcess": {
     "id": "4fd-ty56-gg55",
     "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-gg55",
     "@type": "ProcessRef",
     "@referredType": "Process"
   },
   "relatedParty": [
     {
       "role": "Customer",
       "@type": "RelatedPartyRefOrPartyRoleRef",
       "partyOrPartyRole": {
         "id": "456-f69",
         "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-f69",
         "name": "Jean Pontus",
         "@referredType": "Individual",
         "@type": "PartyRef"
       }
     }
   ],
   "taskCharacteristic": [
     {
       "modality": "input",
       "@type": "FlowCharacteristic",
       "characteristic": {
         "valueType": "string",
         "@type": "StringCharacteristic",
         "name": "Eligibility result",
         "value": "Qualified"
       }
     }
   ],
   "@type": "Task",
   "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/task.json"
 }
```


Updates partially a task

`PATCH /task/{id}?fields=…`

Description

This operation allows partial updates of a Task entity. Support of json/merge (https://tools.ietf.org/html/rfc7396) is mandatory, support of json/patch (http://tools.ietf.org/html/rfc5789) is optional. Note: If the update operation yields to the creation of sub-resources or relationships, the same rules concerning mandatory sub-resource attributes and default value settings in the POST operation applies to the PATCH

© TM Forum 2026. All Rights Reserved.

operation. Hence these tables are not repeated here.

Patchable and Non Patchable Attributes

Non Patchable Attributes	Rule
completionDate	
startDate	
taskSpecification	
@baseType	@baseType is immutable
@schemaLocation	@schemaLocation is immutable
@type	@type is immutable

Patchable Attributes	Rule
channel	
description	
href	
id	
isMandatory	
name	
parentProcess	
priority	
relatedEntity	
relatedParty	
relatedProcess	
state	
taskCharacteristic	
taskRelationship	
taskType	

Usage samples

Update a Task using json-patch-query+json

Request

© TM Forum 2026. All Rights Reserved.

```
PATCH /task/4fd-ty56-gg55-2
Content-Type: application/json-patch-query+json

[
  {
    "op": "replace",
    "path": "/relatedParty/partyOrPartyRole?role=customer",
    "value": {
      "id": "9I8-430",
      "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/9I8-430",
      "name": "Sara Eskiv",
      "@referredType": "Individual",
      "@type": "PartyRef"
    }
  }
]
```

Response

```
200

{
  "id": "4fd-ty56-gg55-2",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-2",
  "isMandatory": true,
  "state": "active",
  "taskType": "businessRuleTask",
  "taskSpecification": {
    "id": "tfs0",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
    "name": "Check Offer Eligibility",
    "version": "1",
    "@type": "TaskSpecificationRef",
    "@referredType": "TaskSpecification"
  },
  "parentProcess": {
    "id": "4fd-ty56-gg55",
    "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-gg55",
    "@type": "ProcessRef",
    "@referredType": "Process"
  },
  "relatedParty": [
    {
      "role": "Customer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "9I8-430",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/9I8-430",
        "name": "Sara Eskiv",
        "@referredType": "Individual",
        "@type": "PartyRef"
      }
    }
  ],
  "taskCharacteristic": [
```

© TM Forum 2026. All Rights Reserved.

```
    {
      "modality": "input",
      "@type": "FlowCharacteristic",
      "characteristic": {
        "valueType": "object",
        "name": "Offer name",
        "@type": "ObjectCharacteristic",
        "value": {
          "name": "productOfferingRef",
          "id": "TMFMobile20",
          "href":
"https://www.mycsp.com/tmfapis/productCatalog/v5/productOffering/TMFMobile20",
          "@type": "ProductOfferingRef",
          "@referredType": "ProductOffering"
        }
      }
    }
  ],
  "@type": "Task",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/task.json"
}
```

Update a Task using json-patch+json

Request

```
PATCH /task/4fd-ty56-gg55-2
Content-Type: application/json-patch+json

[
  {
    "op": "replace",
    "path": "/isMandatory",
    "value": false
  }
]
```

Response

```
200

{
  "id": "4fd-ty56-gg55-2",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-2",
  "isMandatory": false,
  "state": "active",
  "taskType": "businessRuleTask",
  "taskSpecification": {
    "id": "tfs0",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
    "name": "Check Offer Eligibility",
    "version": "1",
    "@type": "TaskSpecificationRef",
```

© TM Forum 2026. All Rights Reserved.

```
    "@referredType": "TaskSpecification"
  },
  "parentProcess": {
    "id": "4fd-ty56-gg55",
    "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-gg55",
    "@type": "ProcessRef",
    "@referredType": "Process"
  },
  "relatedParty": [
    {
      "role": "Customer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "456-f69",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-f69",
        "name": "Jean Pontus",
        "@referredType": "Individual",
        "@type": "PartyRef"
      }
    }
  ],
  "taskCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristic",
      "characteristic": {
        "valueType": "object",
        "@type": "ObjectCharacteristic",
        "name": "Offer name",
        "value": {
          "name": "productOfferingRef",
          "id": "TMFMobile20",
          "href":
"https://www.mycsp.com/tmfapis/productCatalog/v5/productOffering/TMFMobile20",
          "@type": "ProductOfferingRef",
          "@referredType": "ProductOffering"
        }
      }
    }
  ],
  "@type": "Task",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/task.json"
}
```


PATCH Task request leveraging merge-patch+json application example

Request

```
PATCH /task/4fd-ty56-gg55-2
Content-Type: application/merge-patch+json

{
  "isMandatory": false,
  "@type": "Task"
}
```

© TM Forum 2026. All Rights Reserved.

Response

```
200

{
  "id": "4fd-ty56-gg55-2",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-2",
  "isMandatory": false,
  "state": "active",
  "taskType": "businessRuleTask",
  "taskSpecification": {
    "id": "tfs0",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
    "name": "Check Offer Eligibility",
    "version": "1",
    "@type": "TaskSpecificationRef",
    "@referredType": "TaskSpecification"
  },
  "parentProcess": {
    "id": "4fd-ty56-gg55",
    "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-gg55",
    "@type": "ProcessRef",
    "@referredType": "Process"
  },
  "relatedParty": [
    {
      "role": "Customer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "456-f69",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-f69",
        "name": "Jean Pontus",
        "@referredType": "Individual",
        "@type": "PartyRef"
      }
    }
  ],
  "taskCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristic",
      "characteristic": {
        "valueType": "object",
        "@type": "ObjectCharacteristic",
        "name": "",
        "value": {
          "name": "productOfferingRef",
          "id": "TMFMobile20",
          "href":
"https://www.mycsp.com/tmfapis/productCatalog/v5/productOffering/TMFMobile20",
          "@type": "ProductOfferingRef",
          "@referredType": "ProductOffering"
        }
      }
    }
  ],
  "@type": "Task"
```

© TM Forum 2026. All Rights Reserved.

```
}
```

PATCH Task request leveraging json application example

Request

```
PATCH /task/4fd-ty56-gg55-2
Content-Type: application/json

{
  "isMandatory": false,
  "@type": "Task"
}
```

Response

```
200

{
  "id": "4fd-ty56-gg55-2",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/task/4fd-ty56-gg55-2",
  "isMandatory": false,
  "state": "active",
  "taskType": "businessRuleTask",
  "taskSpecification": {
    "id": "tfs0",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
    "name": "Check Offer Eligibility",
    "version": "1",
    "@type": "TaskSpecificationRef",
    "@referredType": "TaskSpecification"
  },
  "parentProcess": {
    "id": "4fd-ty56-gg55",
    "href": "https://www.mycsp.com/tmfapis/processManagement/v5/process/4fd-ty56-gg55",
    "@type": "ProcessRef",
    "@referredType": "Process"
  },
  "relatedParty": [
    {
      "role": "Customer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "456-f69",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/456-f69",
        "name": "Jean Pontus",
        "@referredType": "Individual",
        "@type": "PartyRef"
      }
    }
  ],
  "taskCharacteristic": [
    {
```

© TM Forum 2026. All Rights Reserved.

```
      "modality": "input",
      "@type": "FlowCharacteristic",
      "characteristic": {
        "valueType": "object",
        "@type": "ObjectCharacteristic",
        "name": "",
        "value": {
          "name": "productOfferingRef",
          "id": "TMFMobile20",
          "href":
"https://www.mycsp.com/tmfapis/productCatalog/v5/productOffering/TMFMobile20",
          "@type": "ProductOfferingRef",
          "@referredType": "ProductOffering"
        }
      }
    }
  ],
  "@type": "Task"
}
```


Deletes a task

`DELETE /task/{id}?{filtering}`

Description

This operation deletes a Task entity.

Usage samples

Here's an example of a request for deleting a specific task

Request

```
DELETE /task/4fd-ty56-gg55-2
Content-Type: application/json
```

Response

```
204
```

Operations on TaskSpecification

Retrieves a taskSpecification by ID

`GET /taskSpecification/{id}?fields=…`

Description

© TM Forum 2026. All Rights Reserved.

This operation retrieves a TaskSpecification entity. Attribute selection is enabled for all first level attributes.

Usage samples

Retrieve a taskSpecification from its identifier - only a subset of taskSpecification attributes (as defined in the API) are used in this example

Request

```
GET /taskSpecification/tfs0
Content-Type: application/json
```

Response

```
200

{
  "id": "tfs0",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
  "description": "Check Offer Eligibility",
  "lastUpdate": "2024-04-30T13:03:57.839Z",
  "lifecycleStatus": "active",
  "name": "Eligibility Check",
  "taskType": "businessRuleTask",
  "version": "1",
  "attachment": [
    {
      "attachmentType": "TaskDocumentation",
      "description": "description of the business rules to apply in order to confirm or
not the eligibility",
      "mimeType": "application/pdf",
      "name": "tfs-2-doc",
      "url": "http://host/content/dgpp5466-11ff-4dc8-pm55-4366ht7c43hl",
      "size": {
        "amount": 2105,
        "units": "Mb"
      },
      "validFor": {
        "startDateTime": "2024-04-12T23:20:50.52Z"
      },
      "@type": "Attachment"
    }
  ],
  "taskSpecificationCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristicSpecification",
      "characteristicSpecification": {
        "configurable": true,
        "description": "identification of product offering that the customer wishes to
have",
        "extensible": false,
```

© TM Forum 2026. All Rights Reserved.

```
        "isUnique": false,
        "maxCardinality": 1,
        "minCardinality": 0,
        "name": "productOfferingRef",
        "valueType": "object",
        "@type": "CharacteristicSpecification",
        "@valueSchemaLocation":
"https://www.mycsp.com/tmfapis/productCatalog/v5/schema/productOfferingRef.json"
      }
    },
    {
      "modality": "output",
      "@type": "FlowCharacteristicSpecification",
      "characteristicSpecification": {
        "configurable": true,
        "description": "the qualification result of the eligibility check",
        "extensible": false,
        "isUnique": false,
        "maxCardinality": 1,
        "minCardinality": 1,
        "name": "qualification result",
        "valueType": "string",
        "@type": "CharacteristicSpecification"
      }
    }
  ],
  "taskSpecificationRelationship": [
    {
      "relationshipType": "nextTask",
      "@type": "TaskSpecificationRelationship",
      "taskSpecification": {
        "id": "tfs1",
        "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
        "name": "Initialize ShoppingCart",
        "@referredType": "TaskSpecification",
        "@type": "TaskSpecificationRef"
      }
    }
  ],
  "relatedParty": [
    {
      "role": "designer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "4cf-mg1",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-mg1",
        "name": "Simon Clement",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    },
    {
      "role": "approver",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "fp5-559",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/fp5-559",
        "name": "Kate Noman",
        "@type": "PartyRef",
```


© TM Forum 2026. All Rights Reserved.

```
        "@referredType": "Individual"
      }
    }
  ],
  "validFor": {
    "startDateTime": "2024-12-30T13:03:57.839Z"
  },
  "@type": "TaskSpecification",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/taskSpecification.json"
}
```

List or find taskSpecification objects

`GET /taskSpecification?fields=…&{filtering}`

Description

This operation list TaskSpecification entities. Attribute selection is enabled for all first level attributes. Filtering may be available depending on the compliance level supported by an implementation.

Usage samples

Retrieve a list of taskSpecification(s) - Complete taskSpecification representation are sent back.

Request

```
GET /taskSpecification
Content-Type: application/json
```

Response

```
200

[
  {
    "id": "tfs0",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
    "description": "Check Offer Eligibility",
    "lastUpdate": "2024-04-30T13:03:57.839Z",
    "lifecycleStatus": "active",
    "name": "Eligibility Check",
    "taskType": "businessRuleTask",
    "version": "1",
    "attachment": [
      {
        "attachmentType": "TaskDocumentation",
        "description": "description of the business rules to apply in order to confirm
```

© TM Forum 2026. All Rights Reserved.

```
or not the eligibility",
        "mimeType": "application/pdf",
        "name": "tfs-2-doc",
        "url": "http://host/content/dgpp5466-11ff-4dc8-pm55-4366ht7c43hl",
        "size": {
          "amount": 2105,
          "units": "Mb"
        },
        "validFor": {
          "startDateTime": "2024-04-12T23:20:50.52Z"
        },
        "@type": "Attachment"
      }
    ],
    "taskSpecificationCharacteristic": [
      {
        "modality": "input",
        "@type": "FlowCharacteristicSpecification",
        "characteristicSpecification": {
          "configurable": true,
          "description": "identification of product offering that the customer wishes
to have",
          "extensible": false,
          "isUnique": false,
          "maxCardinality": 1,
          "minCardinality": 0,
          "name": "productOfferingRef",
          "valueType": "object",
          "@type": "CharacteristicSpecification",
          "@valueSchemaLocation":
"https://www.mycsp.com/tmfapis/productCatalog/v5/schema/productOfferingRef.json"
        }
      },
      {
        "modality": "output",
        "@type": "FlowCharacteristicSpecification",
        "characteristicSpecification": {
          "configurable": true,
          "description": "the qualification result of the eligibility check",
          "extensible": false,
          "isUnique": false,
          "maxCardinality": 1,
          "minCardinality": 1,
          "name": "qualification result",
          "valueType": "string",
          "@type": "CharacteristicSpecification"
        }
      }
    ],
    "taskSpecificationRelationship": [
      {
        "relationshipType": "nextTask",
        "@type": "TaskSpecificationRelationship",
        "taskSpecification": {
          "@referredType": "TaskSpecification",
          "@type": "TaskSpecificationRef",
          "id": "tfs1",
          "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
          "name": "Initialize ShoppingCart"
```


© TM Forum 2026. All Rights Reserved.

```
        }
      }
    ],
    "relatedParty": [
      {
        "role": "designer",
        "@type": "RelatedPartyRefOrPartyRoleRef",
        "partyOrPartyRole": {
          "id": "4cf-mg1",
          "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-
mg1",
          "name": "Simon Clement",
          "@type": "PartyRef",
          "@referredType": "Individual"
        }
      },
      {
        "role": "approver",
        "@type": "RelatedPartyRefOrPartyRoleRef",
        "partyOrPartyRole": {
          "id": "fp5-559",
          "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/fp5-
559",
          "name": "Kate Noman",
          "@type": "PartyRef",
          "@referredType": "Individual"
        }
      }
    ],
    "validFor": {
      "startDateTime": "2024-12-30T13:03:57.839Z"
    },
    "@type": "TaskSpecification",
    "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/taskSpecification.json"
  }
]
```


Retrieve a list of taskSpecification(s)- only few attributes are retrieved for each task.

Request

```
GET /taskSpecification?fields=id,@type,href
Content-Type: application/json
```

Response


```
200

[
  {
    "id": "tfs99",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs99",
    "name": "Initialize ShoppingCart",
```


© TM Forum 2026. All Rights Reserved.

```
    "@type": "TaskSpecification"
  },
  {
    "id": "tfs0",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
    "name": "Eligibility Check",
    "@type": "TaskSpecification"
  },
  {
    "id": "tfs1",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
    "name": "Initialize ShoppingCart",
    "@type": "TaskSpecification"
  },
  {
    "id": "tfs2",
    "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs2",
    "name": "Confirm Order",
    "@type": "TaskSpecification"
  }
]
```

Creates a taskSpecification

POST /taskSpecification?fields=…&{filtering}

Description

This operation creates a TaskSpecification entity.

Mandatory Attributes

Mandatory Attributes	Rule
name	M
@type	

Usage samples

Creation of a new taskSpecification with POST operation

Request

```
POST /taskSpecification
Content-Type: application/json

{
  "description": "Initializing ShoppingCart",
  "name": "Initialize ShoppingCart",
```

© TM Forum 2026. All Rights Reserved.

```
  "version": "1",
  "taskType": "businessRuleTask",
  "attachment": [
    {
      "attachmentType": "TaskDocumentation",
      "description": "description of the business rules to apply in order to confirm or
not the eligibility",
      "mimeType": "application/pdf",
      "name": "tfs-2-doc",
      "url": "http://host/Content/dgpp5466-11ff-4dc8-pm55-4366ht7c43hl",
      "size": {
        "amount": 2105,
        "units": "Mb"
      },
      "validFor": {
        "startDateTime": "2023-04-12T23:20:50.52Z"
      },
      "@type": "Attachment"
    }
  ],
  "taskSpecificationCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristicSpecification",
      "characteristicSpecification": {
        "configurable": true,
        "description": "the qualification result of the eligibility check",
        "extensible": false,
        "isUnique": false,
        "maxCardinality": 1,
        "minCardinality": 1,
        "name": "qualification result",
        "valueType": "string",
        "@type": "CharacteristicSpecification"
      }
    }
  ],
  "taskSpecificationRelationship": [
    {
      "relationshipType": "previousTask",
      "@type": "TaskSpecificationRelationship",
      "taskSpecification": {
        "id": "tfs0",
        "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
        "name": "Check Offer Eligibility",
        "@referredType": "TaskSpecification",
        "@type": "TaskSpecificationRef"
      }
    },
    {
      "relationshipType": "nextTask",
      "@type": "TaskSpecificationRelationship",
      "taskSpecification": {
        "id": "tfs3",
        "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs3",
        "name": "Configure Shopping Cart",
        "@referredType": "TaskSpecification",
        "@type": "TaskSpecificationRef"
```


© TM Forum 2026. All Rights Reserved.

```
      }
    }
  ],
  "relatedParty": [
    {
      "role": "designer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "4cf-mg1",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-mg1",
        "name": "Simon Clement",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    },
    {
      "role": "approver",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "fp5-559",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/fp5-559",
        "name": "Kate Noman",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    }
  ],
  "validFor": {
    "startDateTime": "2023-12-30T13:03:57.839Z"
  },
  "@type": "TaskSpecification",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/taskSpecification.json"
}
```


Response


```
201

{
  "id": "tfs0",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
  "description": "Check Offer Eligibility",
  "lastUpdate": "2024-04-30T13:03:57.839Z",
  "lifecycleStatus": "active",
  "name": "Eligibility Check",
  "taskType": "businessRuleTask",
  "version": "1",
  "attachment": [
    {
      "attachmentType": "TaskDocumentation",
      "description": "description of the business rules to apply in order to confirm or
not the eligibility",
      "mimeType": "application/pdf",
      "name": "tfs-2-doc",
      "url": "http://host/content/dgpp5466-11ff-4dc8-pm55-4366ht7c43hl",
      "size": {
        "amount": 2105,
```


© TM Forum 2026. All Rights Reserved.

```
        "units": "Mb"
      },
      "validFor": {
        "startDateTime": "2024-04-12T23:20:50.52Z"
      },
      "@type": "Attachment"
    }
  ],
  "taskSpecificationCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristicSpecification",
      "characteristicSpecification": {
        "configurable": true,
        "description": "identification of product offering that the customer wishes to
have",
        "extensible": false,
        "isUnique": false,
        "maxCardinality": 1,
        "minCardinality": 0,
        "name": "productOfferingRef",
        "valueType": "object",
        "@type": "CharacteristicSpecification",
        "@valueSchemaLocation":
"https://www.mycsp.com/tmfapis/productCatalog/v5/schema/productOfferingRef.json"
      }
    },
    {
      "modality": "output",
      "@type": "FlowCharacteristicSpecification",
      "characteristicSpecification": {
        "configurable": true,
        "description": "the qualification result of the eligibility check",
        "extensible": false,
        "isUnique": false,
        "maxCardinality": 1,
        "minCardinality": 1,
        "name": "qualification result",
        "valueType": "string",
        "@type": "CharacteristicSpecification"
      }
    }
  ],
  "taskSpecificationRelationship": [
    {
      "relationshipType": "nextTask",
      "@type": "TaskSpecificationRelationship",
      "taskSpecification": {
        "id": "tfs1",
        "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
        "name": "Initialize ShoppingCart",
        "@referredType": "TaskSpecification",
        "@type": "TaskSpecificationRef"
      }
    }
  ],
  "relatedParty": [
    {
      "role": "designer",
```


© TM Forum 2026. All Rights Reserved.

```
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "4cf-mg1",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-mg1",
        "name": "Simon Clement",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    },
    {
      "role": "approver",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "fp5-559",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/fp5-559",
        "name": "Kate Noman",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    }
  ],
  "validFor": {
    "startDateTime": "2024-12-30T13:03:57.839Z"
  },
  "@type": "TaskSpecification",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/taskSpecification.json"
}
```


Updates partially a taskSpecification

`PATCH /taskSpecification/{id}?fields=…`

Description

This operation allows partial updates of a TaskSpecification entity. Support of json/merge (https://tools.ietf.org/html/rfc7396) is mandatory, support of json/patch (http://tools.ietf.org/html/rfc5789) is optional. Note: If the update operation yields to the creation of sub-resources or relationships, the same rules concerning mandatory sub-resource attributes and default value settings in the POST operation applies to the PATCH operation. Hence these tables are not repeated here.

Patchable and Non Patchable Attributes

Non Patchable Attributes	Rule
@baseType	@baseType is immutable
@schemaLocation	@schemaLocation is immutable
@type	@type is immutable

© TM Forum 2026. All Rights Reserved.

Patchable Attributes	Rule
attachment	
channel	
description	
href	
id	
lastUpdate	
lifecycleStatus	
name	
relatedParty	
relatedProcessSpecification	
taskSpecificationCharacteristic	
taskSpecificationPolicy	
taskSpecificationRelationship	
taskType	
validFor	
version	

Usage samples

Update a TaskSpecification using json-patch-query+json

Request

```
PATCH /taskSpecification/4fd-ty56-gg55-2
Content-Type: application/json-patch-query+json

[
  {
    "op": "replace",
    "path": "/relatedParty/partyOrPartyRole?role=approver",
    "value": {
      "id": "9I8-430",
      "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/9I8-430",
      "name": "Sara Eskiv",
      "@referredType": "Individual",
      "@type": "PartyRef"
    }
  }
```

© TM Forum 2026. All Rights Reserved.

```
]
```

Response

```
200

{
  "id": "tfs0",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
  "description": "Check Offer Eligibility",
  "lastUpdate": "2024-04-30T13:03:57.839Z",
  "lifecycleStatus": "active",
  "name": "Eligibility Check",
  "taskType": "businessRuleTask",
  "version": "1",
  "attachment": [
    {
      "attachmentType": "TaskDocumentation",
      "description": "description of the business rules to apply in order to confirm or
not the eligibility",
      "mimeType": "application/pdf",
      "name": "tfs-2-doc",
      "url": "http://host/content/dgpp5466-11ff-4dc8-pm55-4366ht7c43hl",
      "size": {
        "amount": 2105,
        "units": "Mb"
      },
      "validFor": {
        "startDateTime": "2024-04-12T23:20:50.52Z"
      },
      "@type": "Attachment"
    }
  ],
  "taskSpecificationCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristicSpecification",
      "characteristicSpecification": {
        "configurable": true,
        "description": "identification of product offering that the customer wishes to
have",
        "extensible": false,
        "isUnique": false,
        "maxCardinality": 1,
        "minCardinality": 0,
        "name": "productOfferingRef",
        "valueType": "object",
        "@type": "CharacteristicSpecification",
        "@valueSchemaLocation":
"https://www.mycsp.com/tmfapis/productCatalog/v5/schema/productOfferingRef.json"
      }
    },
    {
      "modality": "output",
      "@type": "FlowCharacteristicSpecification",
      "characteristicSpecification": {
        "configurable": true,
```

© TM Forum 2026. All Rights Reserved.

```
        "description": "the qualification result of the eligibility check",
        "extensible": false,
        "isUnique": false,
        "maxCardinality": 1,
        "minCardinality": 1,
        "name": "qualification result",
        "valueType": "string",
        "@type": "CharacteristicSpecification"
      }
    }
  ],
  "taskSpecificationRelationship": [
    {
      "relationshipType": "nextTask",
      "@type": "TaskSpecificationRelationship",
      "taskSpecification": {
        "id": "tfs1",
        "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
        "name": "Initialize ShoppingCart",
        "@referredType": "TaskSpecification",
        "@type": "TaskSpecificationRef"
      }
    }
  ],
  "relatedParty": [
    {
      "role": "designer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "4cf-mg1",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-mg1",
        "name": "Simon Clement",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    },
    {
      "role": "approver",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "9I8-430",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/9I8-430",
        "name": "Sara Eskiv",
        "@referredType": "Individual",
        "@type": "PartyRef"
      }
    }
  ],
  "validFor": {
    "startDateTime": "2025-12-30T13:03:57.839Z"
  },
  "@type": "TaskSpecification",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/taskSpecification.json"
}
```


Update a TaskSpecification using json-patch+json

© TM Forum 2026. All Rights Reserved.

Request

```
PATCH /taskSpecification/4fd-ty56-gg55-2
Content-Type: application/json-patch+json

[
  {
    "op": "replace",
    "path": "/validFor",
    "value": {
      "startDateTime": "2025-12-30T13:03:57.839Z"
    }
  }
]
```

Response

```
200

{
  "id": "tfs0",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
  "description": "Check Offer Eligibility",
  "lastUpdate": "2024-04-30T13:03:57.839Z",
  "lifecycleStatus": "active",
  "name": "Eligibility Check",
  "taskType": "businessRuleTask",
  "version": "1",
  "attachment": [
    {
      "attachmentType": "TaskDocumentation",
      "description": "description of the business rules to apply in order to confirm or
not the eligibility",
      "mimeType": "application/pdf",
      "name": "tfs-2-doc",
      "url": "http://host/content/dgpp5466-11ff-4dc8-pm55-4366ht7c43hl",
      "size": {
        "amount": 2105,
        "units": "Mb"
      },
      "validFor": {
        "startDateTime": "2024-04-12T23:20:50.52Z"
      },
      "@type": "Attachment"
    }
  ],
  "taskSpecificationCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristicSpecification",
      "characteristicSpecification": {
        "configurable": true,
        "description": "identification of product offering that the customer wishes to
have",
        "extensible": false,
        "isUnique": false,
```

© TM Forum 2026. All Rights Reserved.

```
        "maxCardinality": 1,
        "minCardinality": 0,
        "name": "productOfferingRef",
        "valueType": "object",
        "@type": "CharacteristicSpecification",
        "@valueSchemaLocation":
"https://www.mycsp.com/tmfapis/productCatalog/v5/schema/productOfferingRef.json"
      }
    },
    {
      "modality": "output",
      "@type": "FlowCharacteristicSpecification",
      "characteristicSpecification": {
        "configurable": true,
        "description": "the qualification result of the eligibility check",
        "extensible": false,
        "isUnique": false,
        "maxCardinality": 1,
        "minCardinality": 1,
        "name": "qualification result",
        "valueType": "string",
        "@type": "CharacteristicSpecification"
      }
    }
  ],
  "taskSpecificationRelationship": [
    {
      "relationshipType": "nextTask",
      "@type": "TaskSpecificationRelationship",
      "taskSpecification": {
        "id": "tfs1",
        "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
        "name": "Initialize ShoppingCart",
        "@referredType": "TaskSpecification",
        "@type": "TaskSpecificationRef"
      }
    }
  ],
  "relatedParty": [
    {
      "role": "designer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "4cf-mg1",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-mg1",
        "name": "Simon Clement",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    },
    {
      "role": "approver",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "fp5-559",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/fp5-559",
        "name": "Kate Noman",
        "@type": "PartyRef",
        "@referredType": "Individual"
```


© TM Forum 2026. All Rights Reserved.

```
      }
    }
  ],
  "validFor": {
    "startDateTime": "2025-12-30T13:03:57.839Z"
  },
  "@type": "TaskSpecification",
  "@schemaLocation": "https://www.mycsp.com/tmfapis/schemas/taskSpecification.json"
}
```

PATCH TaskSpecification request leveraging merge-patch+json application example

Request

```
PATCH /taskSpecification/4fd-ty56-gg55-2
Content-Type: application/merge-patch+json

{
  "validFor": {
    "startDateTime": "2025-12-30T13:03:57.839Z"
  },
  "name": "Eligibility Check",
  "@type": "TaskSpecification"
}
```

Response

```
200

{
  "id": "tfs0",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
  "description": "Check Offer Eligibility",
  "lastUpdate": "2024-04-30T13:03:57.839Z",
  "lifecycleStatus": "active",
  "name": "Eligibility Check",
  "taskType": "businessRuleTask",
  "version": "1",
  "attachment": [
    {
      "attachmentType": "TaskDocumentation",
      "description": "description of the business rules to apply in order to confirm or
not the eligibility",
      "mimeType": "application/pdf",
      "name": "tfs-2-doc",
      "url": "http://host/content/dgpp5466-11ff-4dc8-pm55-4366ht7c43hl",
      "size": {
        "amount": 2105,
        "units": "Mb"
      },
      "validFor": {
        "startDateTime": "2024-04-12T23:20:50.52Z"
      },
      "@type": "Attachment"
```

© TM Forum 2026. All Rights Reserved.

```
    }
  ],
  "taskSpecificationCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristicSpecification",
      "characteristicSpecification": {
        "configurable": true,
        "description": "identification of product offering that the customer wishes to
have",
        "extensible": false,
        "isUnique": false,
        "maxCardinality": 1,
        "minCardinality": 0,
        "name": "productOfferingRef",
        "valueType": "object",
        "@type": "CharacteristicSpecification",
        "@valueSchemaLocation":
"https://www.mycsp.com/tmfapis/productCatalog/v5/schema/productOfferingRef.json"
      }
    },
    {
      "modality": "output",
      "@type": "FlowCharacteristicSpecification",
      "characteristicSpecification": {
        "configurable": true,
        "description": "the qualification result of the eligibility check",
        "extensible": false,
        "isUnique": false,
        "maxCardinality": 1,
        "minCardinality": 1,
        "name": "qualification result",
        "valueType": "string",
        "@type": "CharacteristicSpecification"
      }
    }
  ],
  "taskSpecificationRelationship": [
    {
      "relationshipType": "nextTask",
      "@type": "TaskSpecificationRelationship",
      "taskSpecification": {
        "id": "tfs1",
        "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
        "name": "Initialize ShoppingCart",
        "@referredType": "TaskSpecification",
        "@type": "TaskSpecificationRef"
      }
    }
  ],
  "relatedParty": [
    {
      "role": "designer",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "4cf-mg1",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-mg1",
        "name": "Simon Clement",
        "@type": "PartyRef",
```


© TM Forum 2026. All Rights Reserved.

```
        "@referredType": "Individual"
      }
    },
    {
      "role": "approver",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "fp5-559",
        "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/fp5-559",
        "name": "Kate Noman",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    }
  ],
  "validFor": {
    "startDateTime": "2025-12-30T13:03:57.839Z"
  },
  "@type": "TaskSpecification"
}
```


PATCH TaskSpecification request leveraging json application example

Request

```
PATCH /taskSpecification/4fd-ty56-gg55-2
Content-Type: application/json

{
  "validFor": {
    "startDateTime": "2025-12-30T13:03:57.839Z"
  },
  "name": "Eligibility Check",
  "@type": "TaskSpecification"
}
```

Response


```
200

{
  "id": "tfs0",
  "href": "https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs0",
  "description": "Check Offer Eligibility",
  "lastUpdate": "2024-04-30T13:03:57.839Z",
  "lifecycleStatus": "active",
  "name": "Eligibility Check",
  "taskType": "businessRuleTask",
  "version": "1",
  "attachment": [
    {
      "attachmentType": "TaskDocumentation",
      "description": "description of the business rules to apply in order to confirm or
not the eligibility",
```


© TM Forum 2026. All Rights Reserved.

```
      "mimeType": "application/pdf",
      "name": "tfs-2-doc",
      "url": "http://host/content/dgpp5466-11ff-4dc8-pm55-4366ht7c43hl",
      "size": {
        "amount": 2105,
        "units": "Mb"
      },
      "validFor": {
        "startDateTime": "2024-04-12T23:20:50.52Z"
      },
      "@type": "Attachment"
    }
  ],
  "taskSpecificationCharacteristic": [
    {
      "modality": "input",
      "@type": "FlowCharacteristicSpecification",
      "characteristicSpecification": {
        "configurable": true,
        "description": "identification of product offering that the customer wishes to
have",
        "extensible": false,
        "isUnique": false,
        "maxCardinality": 1,
        "minCardinality": 0,
        "name": "productOfferingRef",
        "valueType": "object",
        "@type": "CharacteristicSpecification",
        "@valueSchemaLocation":
"https://www.mycsp.com/tmfapis/productCatalog/v5/schema/productOfferingRef.json"
      }
    },
    {
      "modality": "output",
      "@type": "FlowCharacteristicSpecification",
      "characteristicSpecification": {
        "configurable": true,
        "description": "the qualification result of the eligibility check",
        "extensible": false,
        "isUnique": false,
        "maxCardinality": 1,
        "minCardinality": 1,
        "name": "qualification result",
        "valueType": "string",
        "@type": "CharacteristicSpecification"
      }
    }
  ],
  "taskSpecificationRelationship": [
    {
      "relationshipType": "nextTask",
      "@type": "TaskSpecificationRelationship",
      "taskSpecification": {
        "id": "tfs1",
        "href":
"https://www.mycsp.com/tmfapis/processManagement/v5/taskSpecification/tfs1",
        "name": "Initialize ShoppingCart",
        "@referredType": "TaskSpecification",
        "@type": "TaskSpecificationRef"
      }
```


© TM Forum 2026. All Rights Reserved.

```
      }
    ],
    "relatedParty": [
      {
        "role": "designer",
        "@type": "RelatedPartyRefOrPartyRoleRef",
        "partyOrPartyRole": {
          "id": "4cf-mg1",
          "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/4cf-mg1",
          "name": "Simon Clement",
          "@type": "PartyRef",
          "@referredType": "Individual"
        }
      },
      {
        "role": "approver",
        "@type": "RelatedPartyRefOrPartyRoleRef",
        "partyOrPartyRole": {
          "id": "fp5-559",
          "href": "https://www.mycsp.com/tmfapis/partyManagement/v5/individual/fp5-559",
          "name": "Kate Noman",
          "@type": "PartyRef",
          "@referredType": "Individual"
        }
      }
    ],
    "validFor": {
      "startDateTime": "2025-12-30T13:03:57.839Z"
    },
    "@type": "TaskSpecification"
  }
```


Deletes a taskSpecification

`DELETE /taskSpecification/{id}?{filtering}`

Description

This operation deletes a TaskSpecification entity.

Usage samples

Here's an example of a request for deleting a specific taskSpecification

Request

```
DELETE /taskSpecification/tfs0
Content-Type: application/json
```

Response

© TM Forum 2026. All Rights Reserved.

```
204
```

© TM Forum 2026. All Rights Reserved.

API NOTIFICATIONS

For every single of operation on the entities use the following templates and provide sample REST notification POST calls.

It is assumed that the Pub/Sub uses the Register and UnRegister mechanisms described in the REST Guidelines reproduced below.

Register listener

POST /hub

Description

Sets the communication endpoint address the service instance must use to deliver information about its health state, execution state, failures and metrics. Subsequent POST calls will be rejected by the service if it does not support multiple listeners. In this case DELETE /api/hub/{id} must be called before an endpoint can be created again.

Behavior

Returns HTTP/1.1 status code 204 if the request was successful.

Returns HTTP/1.1 status code 409 if request is not successful.

Usage Samples

Here's an example of a request for registering a listener.

Request

```
POST /api/hub

Accept: application/json

{
    "callback": "http://in.listener.com"
}
```

Response

```
201

Content-Type: application/json

Location: /api/hub/42
```

© TM Forum 2026. All Rights Reserved.

```
{
    "id":"42",
    "callback": "http://in.listener.com",
    "query":""
}
```

Unregister listener

DELETE /hub/{id}

Description

Clears the communication endpoint address that was set by creating the Hub..

Behavior

Returns HTTP/1.1 status code 204 if the request was successful.

Returns HTTP/1.1 status code 404 if the resource is not found.

Usage Samples

Here's an example of a request for un-registering a listener.

Request

```
DELETE /api/hub/42

Accept: application/json
```

Response

```
204
```

Publish Event to listener

POST /client/listener

Description

Clears the communication endpoint address that was set by creating the Hub.

Provides to a registered listener the description of the event that was raised. The /client/listener url is the callback url passed when registering the listener.

© TM Forum 2026. All Rights Reserved.

Behavior

Returns HTTP/1.1 status code 201 if the service is able to set the configuration.

Usage Samples

Here's an example of a notification received by the listener. In this example "EVENT TYPE" should be replaced by one of the notification types supported by this API (see Notification resources Models section) and EVENT BODY refers to the data structure of the given notification type.

Request

```
POST /client/listener

Accept: application/json

{
    "event": {
        EVENT BODY
    },
    "eventType": "EVENT_TYPE"
}
```

Response

```
201
```

For detailed examples on the general TM Forum notification mechanism, see the TMF REST Design Guidelines.

© TM Forum 2026. All Rights Reserved.

Acknowledgements

Release History

Release Number	Date	Release led by:	Description
Version 4.0		Ludovic Robert Orange ludovic.robert@orange.com Pierre Gauthier TM Forum	First Release of this API Nota: the version 4.0 is assigned to all the APIs delivered in the release 19
Version 4.1.0		Ludovic Robert Orange ludovic.robert@orange.com Pierre Gauthier TM Forum	Adding ProcessFlowSpecification & TaskFlowSpecification resources management. Adding POST operation for TaskFlow Nota: the version 4.0 is assigned to all the APIs delivered in the release 21.5
Version 5.0.0		Amani Dkhil Orange amani.dkhil@sofrecom.com Pierre Gauthier TM Forum	Revise Swagger to adhere to the latest OpenAPI Specification (OAS) version 3.0.1 Refine the API model to align with emerging needs and relevant standards. Rename resources: ProcessFlow to Process, TaskFlow to Task and renaming API to Process Management API

© TM Forum 2026. All Rights Reserved.

Contributors to Document

Contributer	Company	Role
Amani Dkhil	Orange	API Owner
Jonathan Goldberg	TM Forum	Reviewer
Pierre Gauthier	TM Forum	Contributor
Jacob Avraham	Amdocs	Contributor
Ludovic Robert	Orange	Contributor

© TM Forum 2026. All Rights Reserved.